




A company of SIM Tech

SIM800C-DS_Hardware_Design_V1.01

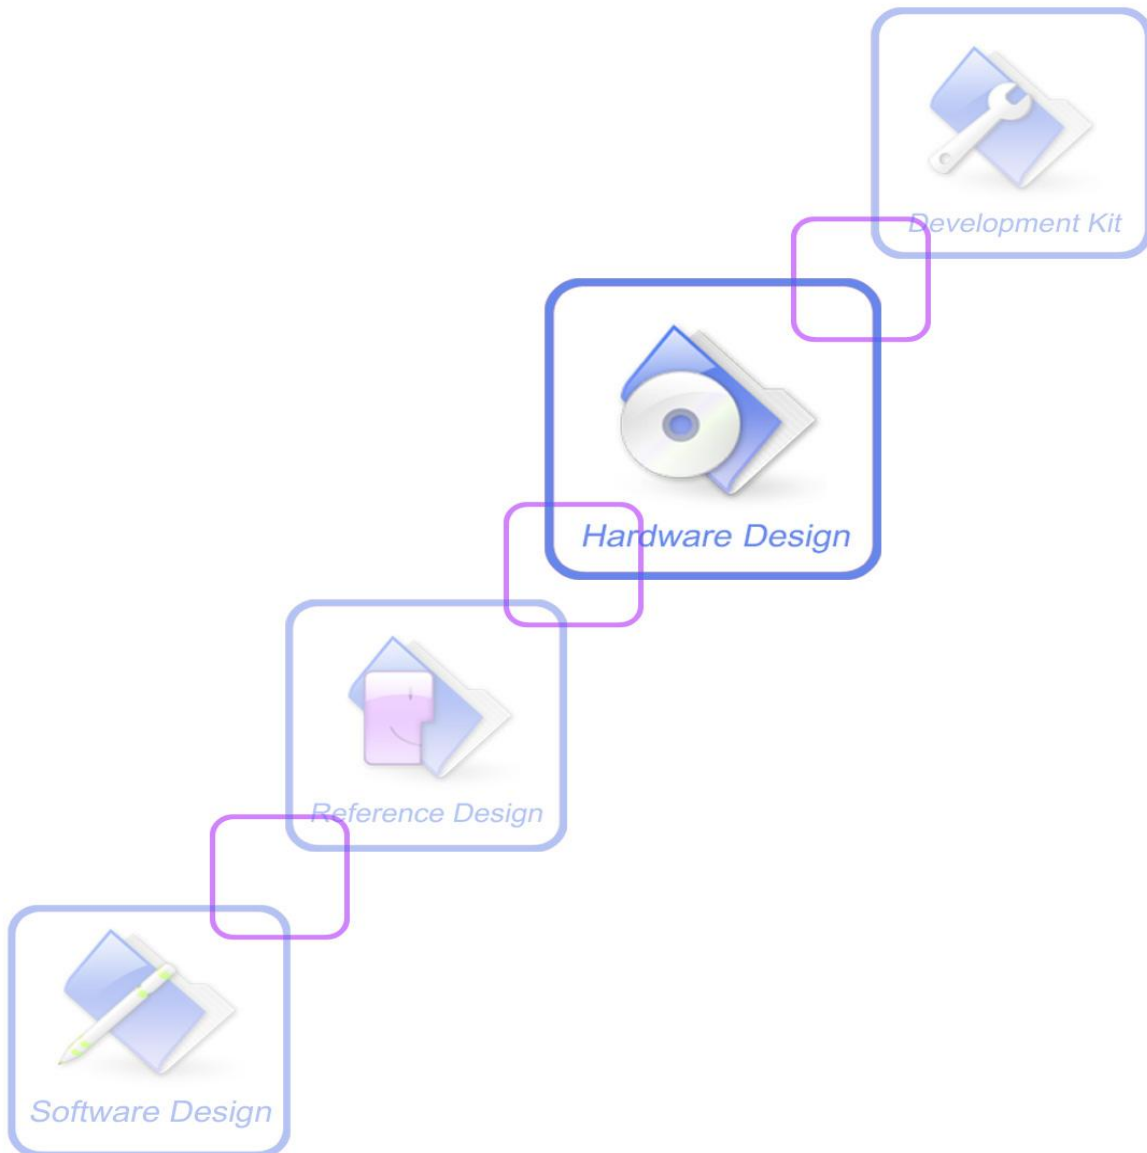

| | |
|----------------------------|----------------------------------|
| Document Title | SIM800C-DS Hardware Design |
| Version | V1.01 |
| Date | 2016-07-04 |
| Status | Release |
| Document Control ID | SIM800C-DS_Hardware_Design_V1.01 |

General Notes

SIMCom offers this information as a service to its customers, to support application and engineering efforts that use the products designed by SIMCom. The information provided is based upon requirements specifically provided to SIMCom by the customers. SIMCom has not undertaken any independent search for additional relevant information, including any information that may be in the customer's possession. Furthermore, system validation of this product designed by SIMCom within a larger electronic system remains the responsibility of the customer or the customer's system integrator. All specifications supplied herein are subject to change.

Copyright

This document contains proprietary technical information which is the property of SIMCom Limited, copying of this document and giving it to others and the using or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights reserved in the event of grant of a patent or the registration of a utility model or design. All specification supplied herein are subject to change without notice at any time.

Copyright © Shanghai SIMCom Wireless Solutions Ltd. 2016

Contents

| | |
|--|-----------|
| Version History | 9 |
| 1. Introduction | 10 |
| 2. SIM800C-DS Overview | 10 |
| 2.1. SIM800C-DS | 10 |
| 2.2. SIM800C-DS Key Features | 10 |
| 2.3. Operating Mode | 12 |
| 2.4. Functional Diagram..... | 13 |
| 3. Package Information | 14 |
| 3.1. Pin Out Diagram | 14 |
| 3.2. Pin Description..... | 14 |
| 3.3. Package Dimensions | 17 |
| 4. Application Interface | 20 |
| 4.1. Power Supply | 20 |
| 4.1.1. Power Supply Pin..... | 21 |
| 4.1.2. Monitoring Power Supply | 22 |
| 4.2. Power on/off SIM800C-DS | 22 |
| 4.2.1. Power on SIM800C-DS | 22 |
| 4.2.2. Power off SIM800C-DS..... | 23 |
| 4.3. Power Saving Mode | 24 |
| 4.3.1. Minimum Functionality Mode | 24 |
| 4.3.2. Sleep Mode 1 (AT+CSCLK=1) | 25 |
| 4.3.3. Wake Up SIM800C-DS from Sleep Mode 1..... | 25 |
| 4.3.4. Sleep Mode 2 (AT+CSCLK=2) | 25 |
| 4.3.5. Wake Up SIM800C-DS from Sleep Mode 2..... | 25 |
| 4.4. Power Saving Mode | 25 |
| 4.5. Serial Port and USB Interface | 26 |
| 4.5.1. Function of Serial Port | 27 |
| 4.5.2. Serial Interfaces..... | 28 |
| 4.5.3. Debug Interface..... | 29 |
| 4.5.4. Software Upgrade..... | 30 |
| 4.6. UART1_RI Behaviors..... | 30 |
| 4.7. Audio Interfaces..... | 31 |
| 4.7.1. Speaker Interfaces Configuration..... | 32 |
| 4.7.2. Microphone Interfaces Configuration | 32 |
| 4.7.3. Audio Electronic Characteristic | 33 |
| 4.7.4. TDD | 33 |
| 4.8. SIM Card Interface..... | 33 |
| 4.8.1. SIM Card Application | 33 |

| | | |
|-----------|--|-----------|
| 4.8.2. | SIM Card Design Guide | 34 |
| 4.8.3. | Design Considerations for SIM Card Holder | 35 |
| 4.9. | PCM Interface | 38 |
| 4.9.1. | PCM Interface | 38 |
| 4.10. | SD Interface | 39 |
| 4.11. | I2C Bus | 39 |
| 4.12. | ADC | 39 |
| 4.13. | Network Status Indication..... | 40 |
| 4.14. | Operating Status Indication..... | 40 |
| 4.15. | RF Synchronization Signal | 41 |
| 4.16. | Antenna Interface | 41 |
| 4.16.1. | GSM Antenna Interface | 41 |
| 4.16.2. | Bluetooth Antenna Interface | 42 |
| 4.16.3. | FM Antenna Interface | 43 |
| 5. | PCB Layout | 44 |
| 5.1 | Pin Assignment | 44 |
| 5.2 | Principle of PCB Layout | 44 |
| 5.2.1 | Antenna Interface | 45 |
| 5.2.2 | Power Supply | 45 |
| 5.2.3 | SIM Card Interface..... | 45 |
| 5.2.4 | Audio Interface..... | 45 |
| 5.2.5 | Others | 45 |
| 6. | Electrical, Reliability and Radio Characteristics | 46 |
| 6.1 | Absolute Maximum Ratings | 46 |
| 6.2 | Recommended Operating Conditions | 46 |
| 6.3 | Digital Interface Characteristics..... | 46 |
| 6.4 | SIM Card Interface Characteristics..... | 46 |
| 6.5 | SIM_VDD Characteristics | 47 |
| 6.6 | VDD_EXT Characteristics | 47 |
| 6.7 | VRTC Characteristics | 47 |
| 6.8 | Current Consumption (VBAT=4.0V) | 47 |
| 6.9 | Electro-Static Discharge | 48 |
| 6.10 | Radio Characteristics | 49 |
| 6.10.1 | Module RF Output Power..... | 49 |
| 6.10.2 | Module RF Receive Sensitivity | 50 |
| 6.10.3 | Module Operating Frequencies..... | 50 |
| 7. | Manufacturing | 51 |
| 7.1. | Top and Bottom View of SIM800C-DS | 51 |
| 7.2. | Typical Solder Reflow Profile | 51 |
| 7.3. | The Moisture Sensitivity Level..... | 52 |
| 7.4. | Baking Requirements..... | 52 |
| 8. | Appendix..... | 53 |

| | | |
|------|-------------------------------|----|
| I. | Related Documents | 53 |
| II. | Terms and Abbreviations | 54 |
| III. | Safety Caution..... | 56 |

SIMCOM CONFIDENTIAL FILE

Table Index

| | |
|---|----|
| TABLE 1: MODULE INFORMATION | 10 |
| TABLE 2: SIM800C-DS KEY FEATURES | 10 |
| TABLE 3: CODING SCHEMES AND MAXIMUM NET DATA RATES OVER AIR INTERFACE | 12 |
| TABLE 4: OVERVIEW OF OPERATING MODES | 12 |
| TABLE 5: PIN DESCRIPTION | 14 |
| TABLE 6: RECOMMENDED ZENER DIODE | 20 |
| TABLE 7: THE CURRENT CONSUMPTION OF FUNCTION MODE | 24 |
| TABLE 8: SERIAL PORT AND USB PIN DEFINITION | 26 |
| TABLE 9: SERIAL PORT CHARACTERISTICS | 27 |
| TABLE 10: USB_VBUS OPERATION VOLTAGE | 30 |
| TABLE 11: RI BEHAVIORS | 30 |
| TABLE 12: AUDIO INTERFACE DEFINITION | 31 |
| TABLE 13: PERFORMANCE OF AUDIO AMPLIFIER | 32 |
| TABLE 14: MICROPHONE INPUT CHARACTERISTICS | 33 |
| TABLE 15: AUDIO OUTPUT CHARACTERISTICS | 33 |
| TABLE 16: SIM PIN DEFINITION | 33 |
| TABLE 17: PIN DESCRIPTION (MOLEX SIM CARD HOLDER) | 35 |
| TABLE 18: PIN DESCRIPTION (AMPHENOL SIM CARD HOLDER) | 37 |
| TABLE 19: PCM PIN DEFINITION | 38 |
| TABLE 20: PCM SPECIFICATION | 38 |
| TABLE 21: PIN DEFINITION OF THE I2C | 39 |
| TABLE 22: PIN DEFINITION OF THE ADC | 39 |
| TABLE 23: ADC SPECIFICATION | 39 |
| TABLE 24: PIN DEFINITION OF THE NETLIGHT | 40 |
| TABLE 25: STATUS OF THE NETLIGHT PIN | 40 |
| TABLE 26: PIN DEFINITION OF THE STATUS | 40 |
| TABLE 27: DEFINITION OF THE RF_SYNC PIN | 41 |
| TABLE 28: RECOMMENDED TVS COMPONENT | 42 |
| TABLE 29: ABSOLUTE MAXIMUM RATINGS | 46 |
| TABLE 30: RECOMMENDED OPERATING CONDITIONS | 46 |
| TABLE 31: DIGITAL INTERFACE CHARACTERISTICS | 46 |
| TABLE 32: SIM CARD INTERFACE CHARACTERISTICS | 46 |
| TABLE 33: SIM_VDD CHARACTERISTICS | 47 |
| TABLE 34: VDD_EXT CHARACTERISTICS | 47 |
| TABLE 35: VRTC CHARACTERISTICS | 47 |
| TABLE 36: CURRENT CONSUMPTION | 47 |
| TABLE 37: THE ESD CHARACTERISTICS (TEMPERATURE: 25°C, HUMIDITY: 45 %) | 48 |
| TABLE 38: GSM850 AND EGSM900 CONDUCTED RF OUTPUT POWER | 49 |
| TABLE 39: DCS1800 AND PCS1900 CONDUCTED RF OUTPUT POWER | 49 |
| TABLE 40: CONDUCTED RF RECEIVE SENSITIVITY | 50 |
| TABLE 41: OPERATING FREQUENCIES | 50 |
| TABLE 42: MOISTURE SENSITIVITY LEVEL AND FLOOR LIFE | 52 |
| TABLE 43: BAKING REQUIREMENTS | 52 |
| TABLE 44: RELATED DOCUMENTS | 53 |
| TABLE 45: TERMS AND ABBREVIATIONS | 54 |

TABLE 46: SAFETY CAUTION..... 56

SIMCOM CONFIDENTIAL FILE

Figure Index

| | |
|--|----|
| FIGURE 1: SIM800C-DS FUNCTIONAL DIAGRAM..... | 13 |
| FIGURE 2: PIN OUT DIAGRAM (TOP VIEW)..... | 14 |
| FIGURE 3: DIMENSIONS OF SIM800C-DS (UNIT: MM)..... | 17 |
| FIGURE 4: RECOMMENDED PCB FOOTPRINT OUTLINE (UNIT: MM)..... | 18 |
| FIGURE 5: RECOMMENDED SMT STENCIL FOOTPRINT OUTLINE (UNIT: MM)..... | 19 |
| FIGURE 6: REFERENCE CIRCUIT OF THE VBAT INPUT..... | 20 |
| FIGURE 7: REFERENCE CIRCUIT OF THE LDO POWER SUPPLY..... | 20 |
| FIGURE 8: REFERENCE CIRCUIT OF THE DC-DC POWER SUPPLY..... | 21 |
| FIGURE 9: VBAT VOLTAGE DROP DURING TRANSMIT BURST..... | 21 |
| FIGURE 10: THE MINIMAL VBAT VOLTAGE REQUIREMENT AT VBAT DROP..... | 21 |
| FIGURE 11: POWERED ON/DOWN MODULE USING TRANSISTOR..... | 22 |
| FIGURE 12: POWERED ON/DOWN MODULE USING BUTTON..... | 22 |
| FIGURE 13: TIMING OF POWER ON MODULE..... | 22 |
| FIGURE 14: TIMING OF POWER OFF SIM800C-DS BY PWRKEY..... | 23 |
| FIGURE 15: TIMING OF RESTART SIM800C-DS..... | 24 |
| FIGURE 16: RTC SUPPLY FROM CAPACITOR..... | 26 |
| FIGURE 17: RTC SUPPLY FROM NON-CHARGEABLE BATTERY..... | 26 |
| FIGURE 18: RTC SUPPLY FROM RECHARGEABLE BATTERY..... | 26 |
| FIGURE 19: CONNECTION OF THE SERIAL INTERFACES..... | 28 |
| FIGURE 20: RESISTOR MATCHING CIRCUIT..... | 28 |
| FIGURE 21 : DIODE ISOLATION CIRCUIT..... | 28 |
| FIGURE 22: TX LEVEL MATCHING CIRCUIT..... | 29 |
| FIGURE 23: RX LEVEL MATCHING CIRCUIT..... | 29 |
| FIGURE 24: USB REFERENCE CIRCUIT..... | 29 |
| FIGURE 25: CONNECTION FOR SOFTWARE UPGRADING AND DEBUGGING..... | 30 |
| FIGURE 26: UART1_RI BEHAVIOUR OF VOICE CALLING AS A RECEIVER..... | 31 |
| FIGURE 27: UART1_RI BEHAVIOUR OF URC OR RECEIVE SMS..... | 31 |
| FIGURE 28: UART1_RI BEHAVIOUR AS A CALLER..... | 31 |
| FIGURE 29: SPEAKER REFERENCE CIRCUIT..... | 32 |
| FIGURE 30: MICROPHONE REFERENCE CIRCUIT..... | 33 |
| FIGURE 31: REFERENCE CIRCUIT OF THE 8-PIN SIM CARD HOLDER..... | 34 |
| FIGURE 32: REFERENCE CIRCUIT OF THE 6-PIN SIM CARD HOLDER..... | 34 |
| FIGURE 33: MOLEX 91228 SIM CARD HOLDER..... | 35 |
| FIGURE 34: AMPHENOL C707 10M006 512 SIM CARD HOLDER..... | 37 |
| FIGURE 35: PCM REFERENCE CIRCUIT..... | 38 |
| FIGURE 36: SD REFERENCE CIRCUIT..... | 39 |
| FIGURE 37: REFERENCE CIRCUIT OF NETLIGHT..... | 40 |
| FIGURE 38: RF_SYNC SIGNAL DURING TRANSMIT BURST..... | 41 |
| FIGURE 39: GSM ANTENNA MATCHING CIRCUIT..... | 41 |
| FIGURE 40: GSM ANTENNA MATCHING CIRCUIT WITHOUT RF CONNECTOR..... | 42 |
| FIGURE 41: BLUETOOTH ANTENNA MATCHING CIRCUIT..... | 42 |
| FIGURE 42: FM ANTENNA MATCHING CIRCUIT..... | 43 |
| FIGURE 43: GND PIN OF THE EARPHONE USE TO BE THE FM ANTENNA CIRCUIT..... | 43 |
| FIGURE 44: PIN ASSIGNMENT..... | 44 |
| FIGURE 45: TOP AND BOTTOM VIEW OF SIM800C-DS..... | 51 |
| FIGURE 46: TYPICAL SOLDER REFLOW PROFILE OF LEAD-FREE PROCESSES..... | 51 |

Version History

| Date | Version | Description of change | Author |
|------------|---------|---|---------------------------|
| 2015-10-30 | 1.00 | Origin | Yanwu.wang; Xiaobo.bai |
| 2016-07-04 | 1.01 | <ol style="list-style-type: none"> 1. Change PWRKEY pin from at least 1 second to 1.5 second for power off the module 2. Add TVS component to GSM Antenna 3. Add recommended TVS component of GSM Antenna 4. Modify figure 3 and figure 4 5. Delete Over-Voltage or Under-Voltage Power off 6. Delete multiplexing function of GPIO 7. Delete Over-Temperature or Under- Temperature Power off 8. Add Recommend SMT stencil PCB footprint | Yanwu.wang; Xiaobo.bai |

SIMCOM CONFIDENTIAL

1. Introduction

This document describes SIM800C-DS hardware interface in great detail. The document can help customer to quickly understand SIM800C-DS interface specifications, electrical and mechanical details. With the help of this document and other SIM800C-DS application notes, customer guide, customers can use SIM800C-DS to design various applications quickly.

2. SIM800C-DS Overview

SIM800C-DS is a quad-band GSM/GPRS module that works on frequencies GSM850MHz, EGSM900MHz, DCS1800MHz and PCS1900MHz. SIM800C-DS features GPRS multi-slot class10/class12 (optional) and supports the GPRS coding schemes CS-1, CS-2, CS-3 and CS-4.

With a tiny configuration of 17.6*15.7*2.3mm, SIM800C-DS can meet almost all the space requirements in customers' applications, such as smart phone, PDA and other mobile devices.

SIM800C-DS is a SMT+LGA package with 77 pads, and provides all hardware interfaces between the module and customers' boards.

- One 3 lines serial port and one full modem serial port;
- USB interface which can be used for debugging and upgrading firmware;
- Audio channels which include a microphone input and two speakers output;
- Programmable general purpose input and output;
- Two SIM cards interface;
- Support Bluetooth (need software support);
- PCM card interface;
- SD card interface;
- I2C interface.

SIM800C-DS is designed with power saving technique so that the current consumption is as low as 0.8mA in sleep mode.

2.1. SIM800C-DS

Table 1: Module information

| Information | SIM800C-DS |
|-------------|--------------------------|
| GSM | 850,900,1800 and 1900MHz |
| BT | (need software support) |
| FLASH | 32Mbit |
| RAM | 32Mbit |

2.2. SIM800C-DS Key Features

Table 2: SIM800C-DS key features

| Feature | Implementation |
|--------------|----------------|
| Power supply | 3.4V ~4.4V |

| | |
|--------------------------|--|
| Power saving | Typical power consumption in sleep mode is 0.8mA (AT+CFUN=0) |
| Frequency bands | <ul style="list-style-type: none"> ● Quad-band: GSM 850, EGSM 900, DCS 1800, PCS 1900. SIM800C-DS can search the 4 frequency bands automatically. The frequency bands can also be set by AT command “AT+CBAND”. For details, please refer to <i>document [1]</i>. ● Compliant to GSM Phase 2/2+ |
| Transmitting power | <ul style="list-style-type: none"> ● Class 4 (2W) at GSM 850 and EGSM 900 ● Class 1 (1W) at DCS 1800 and PCS 1900 |
| GPRS connectivity | <ul style="list-style-type: none"> ● GPRS multi-slot class 12 (default) ● GPRS multi-slot class 1~12 (option) |
| Temperature range | <ul style="list-style-type: none"> ● Normal operation: -40 ℃ ~ +85 ℃ ● Storage temperature -45 ℃ ~ +90 ℃ |
| Data GPRS | <ul style="list-style-type: none"> ● GPRS data downlink transfer: max. 85.6 kbps ● GPRS data uplink transfer: max. 85.6 kbps ● Coding scheme: CS-1, CS-2, CS-3 and CS-4 ● PAP protocol for PPP connect ● Integrate the TCP/IP protocol. ● Support Packet Broadcast Control Channel (PBCCH) |
| USSD | <ul style="list-style-type: none"> ● Unstructured Supplementary Services Data (USSD) support |
| SMS | <ul style="list-style-type: none"> ● MT, MO, CB, Text and PDU mode ● SMS storage: SIM card |
| SIM interface | Support SIM card: 1.8V, 3V |
| External antenna | Antenna pad |
| Audio features | <p>Speech codec modes:</p> <ul style="list-style-type: none"> ● Half Rate (ETS 06.20) ● Full Rate (ETS 06.10) ● Enhanced Full Rate (ETS 06.50 / 06.60 / 06.80) ● Adaptive multi rate (AMR) ● Echo Cancellation ● Noise Suppression |
| Serial port and USB port | <p>Serial port:</p> <ul style="list-style-type: none"> ● Default one Full modem serial port ● Can be used for AT commands or data stream ● Support RTS/CTS hardware handshake and software ON/OFF flow control ● Multiplex ability according to GSM 07.10 Multiplexer Protocol ● Autobauding supports baud rate from 1200 bps to 115200bps ● upgrading firmware <p>USB port:</p> <ul style="list-style-type: none"> ● USB_DM and USB_DP ● Can be used for debugging and upgrading firmware |
| Phonebook management | Support phonebook types: SM, FD, LD, RC, ON, MC |
| SIM application toolkit | GSM 11.14 Release 99 |
| Physical characteristics | <p>Size:17.6*15.7*2.3mm</p> <p>Weight:1.3g</p> |
| Firmware upgrade | Full modern serial port or USB port(recommend to use USB port) |

Table 3: Coding schemes and maximum net data rates over air interface

| Coding scheme | 1 timeslot | 2 timeslot | 4 timeslot |
|---------------|------------|------------|------------|
| CS-1 | 9.05kbps | 18.1kbps | 36.2kbps |
| CS-2 | 13.4kbps | 26.8kbps | 53.6kbps |
| CS-3 | 15.6kbps | 31.2kbps | 62.4kbps |
| CS-4 | 21.4kbps | 42.8kbps | 85.6kbps |

2.3. Operating Mode

The table below summarizes the various operating modes of SIM800C-DS.

Table 4: Overview of operating modes

| Mode | Function |
|----------------------------|---|
| Normal operation | GSM/GPRS SLEEP Module will automatically go into sleep mode if the conditions of sleep mode are enabling and there aren't on air and hardware interrupt (such as GPIO interrupt or data on serial port). In this case, the current consumption of module will reduce to the minimal level. In sleep mode, the module can still receive paging message and SMS. |
| | GSM IDLE Software is active. Module is registered to the GSM network, and the module is ready to communicate. |
| | GSM TALK Connection between two subscribers is in progress. In this case, the power consumption depends on network settings such as DTX off/on, FR/EFR/HR, hopping sequences, antenna. |
| | GPRS STANDBY Module is ready for GPRS data transfer, but no data is currently sent or received. In this case, power consumption depends on network settings and GPRS configuration. |
| | GPRS DATA There is GPRS data transfer (PPP or TCP or UDP) in progress. In this case, power consumption is related with network settings (e.g. power control level); uplink/downlink data rates and GPRS configuration (e.g. used multi-slot settings). |
| Power off | Normal power off by sending AT command "AT+CPOWD=1" or using the PWRKEY. The power management unit shuts down the power supply for the baseband part of the module. Software is not active. The serial port is not accessible. Power supply (connected to 3V) remains applied. |
| Minimum functionality mode | AT command "AT+CFUN" can be used to set the module to a minimum functionality mode without removing the power supply. In this mode, the RF part of the module will not work or the SIM card will not be accessible, or both RF part and SIM card will be closed, and the serial port is still accessible. The power consumption in this mode is lower than normal mode. |

2.4. Functional Diagram

The following figure shows a functional diagram of SIM800C-DS:

- GSM baseband
- GSM RF
- Antenna interface
- Other interface

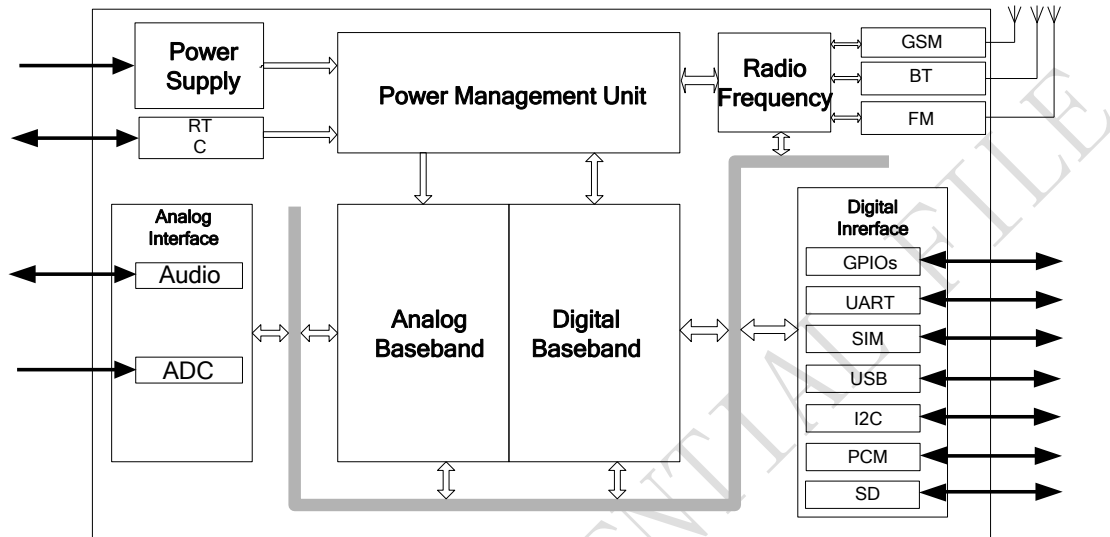


Figure 1: SIM800C-DS functional diagram

| | | | | |
|-------------------------|---------------------------------|-----|--|--------------------------------------|
| | 6,68,69,70,71,72,73,74,75,76,77 | | | |
| Power on/down | | | | |
| PWRKEY | 39 | I | PWRKEY should be pulled low at least 1 second and then released to power on/down the module. | Internally pulled up to 3V. |
| Audio interfaces | | | | |
| MICP | 9 | I | Differential audio input | If these pins are unused, keep open. |
| MICN | 10 | | | |
| SPK1P | 11 | O | Differential audio output | |
| SPK1N | 12 | | | |
| SPK2P | 44 | | | |
| SPK2N | 43 | | | |
| PCM interface | | | | |
| PCM_OUT | 62 | O | PCM interface for digital audio | If these pins are unused, keep open. |
| PCM_IN | 60 | I | | |
| PCM_SYNC | 61 | O | | |
| PCM_CLK | 59 | I | | |
| SD interface | | | | |
| MCCA3 | 46 | I/O | SD serial data I/O | If these pins are unused, keep open. |
| MCCA2 | 47 | I/O | | |
| MCCA1 | 48 | I/O | | |
| MCCA0 | 49 | I/O | | |
| MCCK | 50 | I/O | SD serial clock | |
| MCCM0 | 51 | I/O | SD command output | |
| GPIO | | | | |
| NETLIGHT | 41 | O | Network status | If these pins are unused, keep open. |
| STATUS | 42 | O | Power on status | |
| GPIO1 | 57 | I/O | Programmable general purpose input and output. | |
| GPIO2 | 58 | I/O | | |
| Serial port | | | | |
| UART1_DTR | 6 | I | Data terminal ready | If these pins are unused, keep open. |
| UART1_RI | 7 | O | Ring indicator | |
| UART1_DCD | 5 | O | Data carrier detect | |
| UART1_CTS | 4 | O | Clear to send | |
| UART1_RTS | 3 | I | Request to send | |
| UART1_TXD | 1 | O | Transmit data | |
| UART1_RXD | 2 | I | Receive data | |
| UART2_TXD | 22 | O | Transmit data | |
| UART2_RXD | 23 | I | Receive data | |
| Debug interface | | | | |
| USB_VBUS | 24 | I | Debug and download | If these pins are unused, |

| | | | | |
|-----------------------------------|----|-----|--|--|
| USB_DP | 25 | I/O | | keep open. |
| USB_DM | 26 | I/O | | |
| ADC | | | | |
| ADC | 38 | I | 10bit general analog to digital converter | If these pins are unused, keep open. |
| I2C | | | | |
| SDA | 64 | I/O | I2C serial bus data | Internal pulled up to 2.8V via 4.7KΩ |
| SCL | 65 | O | I2C serial bus clock | |
| SIM card interface | | | | |
| SIM1_VDD | 18 | O | Voltage supply for SIM card. Support 1.8V or 3V SIM card | All signals of SIM interface should be protected against ESD with a TVS diode array. |
| SIM1_DATA | 15 | I/O | SIM data input/output | |
| SIM1_CLK | 16 | O | SIM clock | |
| SIM1_RST | 17 | O | SIM reset | |
| SIM1_DET | 14 | I | SIM card detection | If these pins are unused, keep open. |
| SIM2_VDD | 56 | O | Voltage supply for SIM card. Support 1.8V or 3V SIM card | All signals of SIM interface should be protected against ESD with a TVS diode array. |
| SIM2_DATA | 53 | I/O | SIM data input/output | |
| SIM2_CLK | 54 | O | SIM clock | |
| SIM2_RST | 55 | O | SIM reset | |
| SIM2_DET | 52 | I | SIM card detection | If these pins are unused, keep open. |
| Antenna interface | | | | |
| GSM_ANT | 32 | I/O | Connect GSM antenna | If these pins are unused, keep open. |
| BT_ANT | 20 | I/O | Connect Bluetooth antenna | |
| FM_ANT | 67 | I | Connect FM antenna | |
| Synchronizing signal of RF | | | | |
| RF_SYNC | 29 | O | Synchronizing signal of RF | |

SIMCO

3.3. Package Dimensions

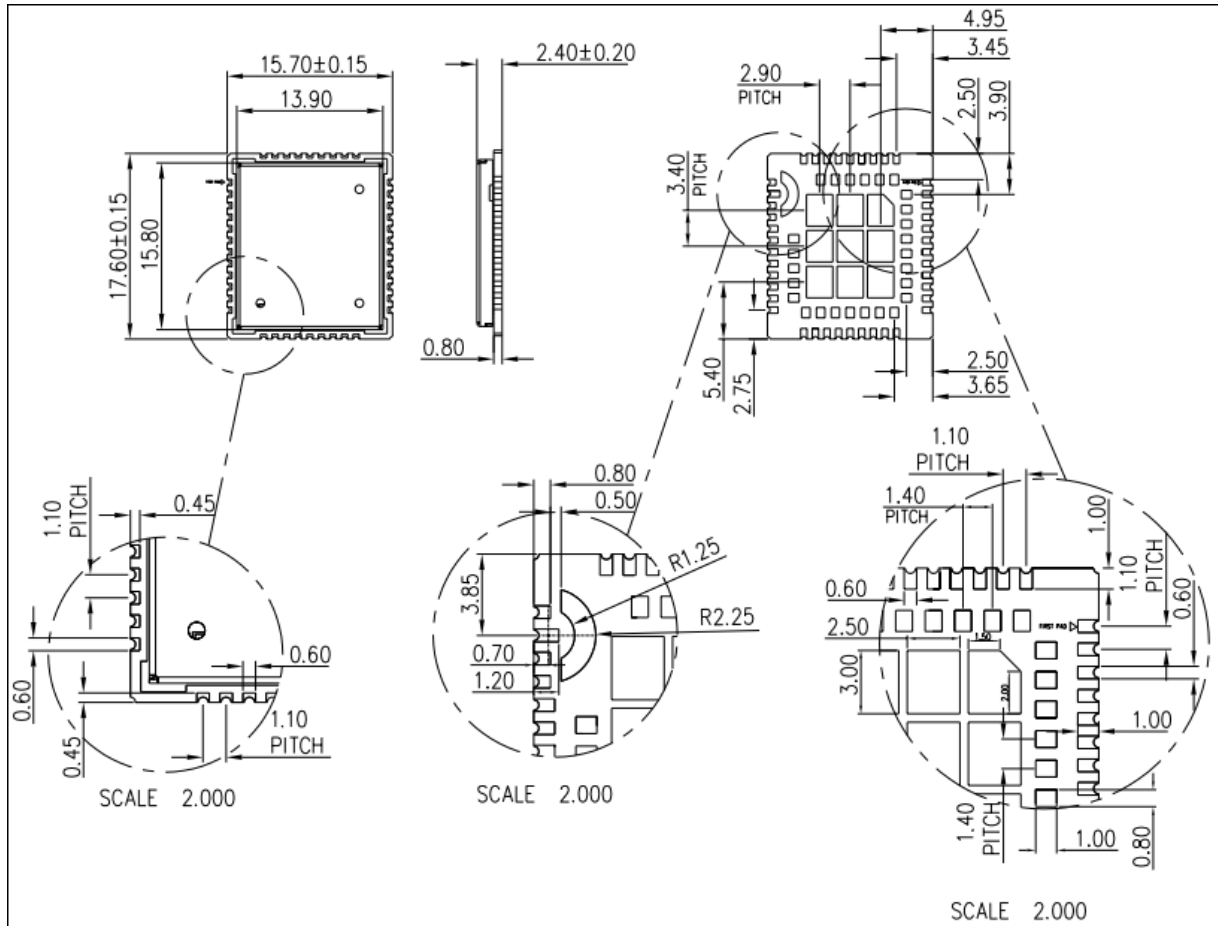


Figure 3: Dimensions of SIM800C-DS (Unit: mm)

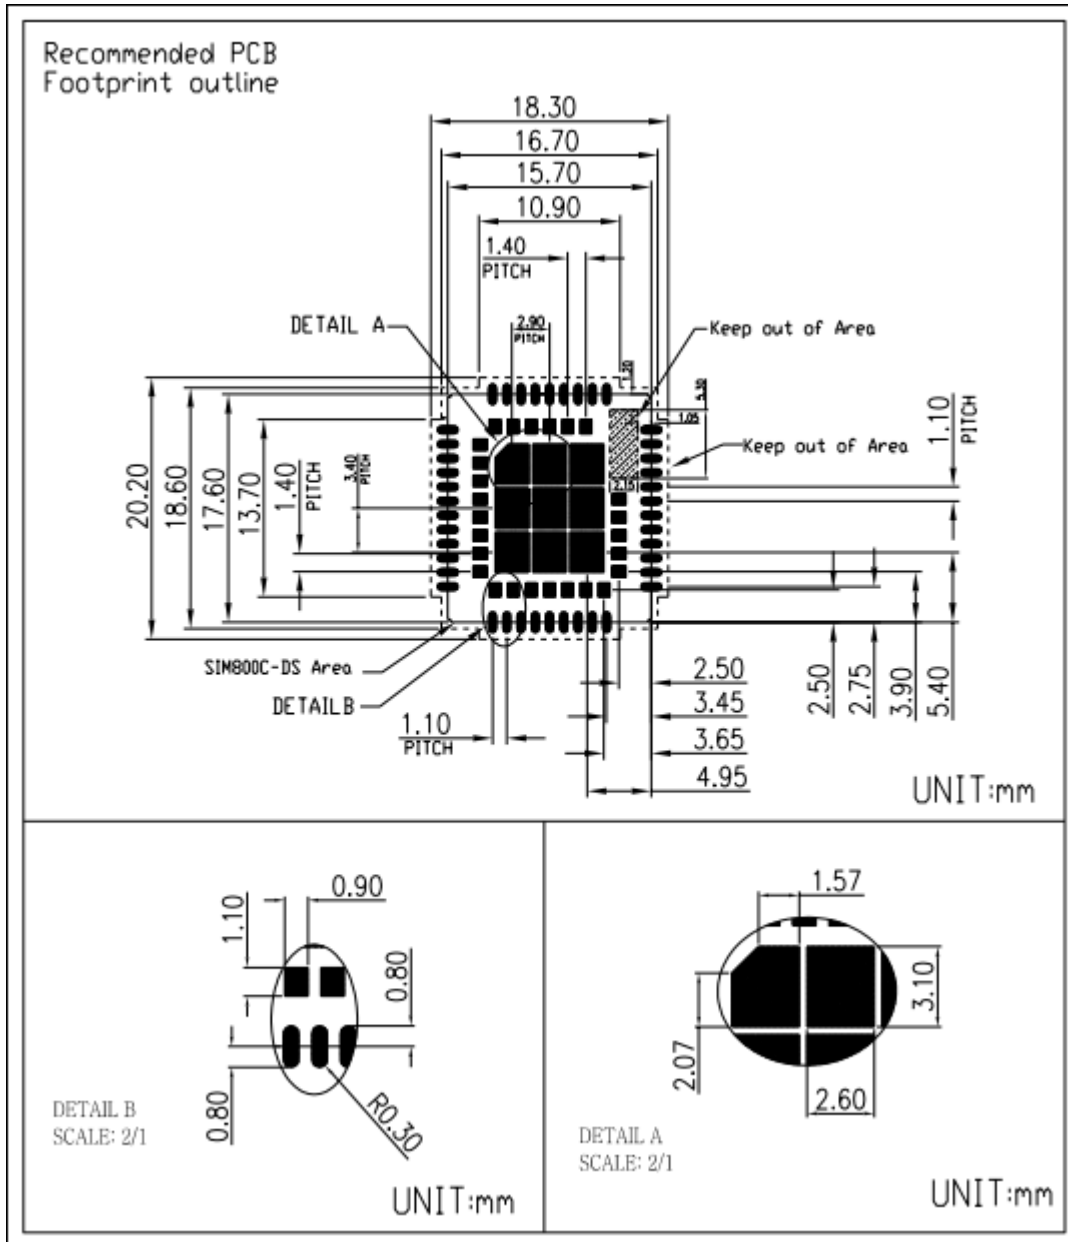


Figure 4: Recommended PCB footprint outline (Unit: mm)

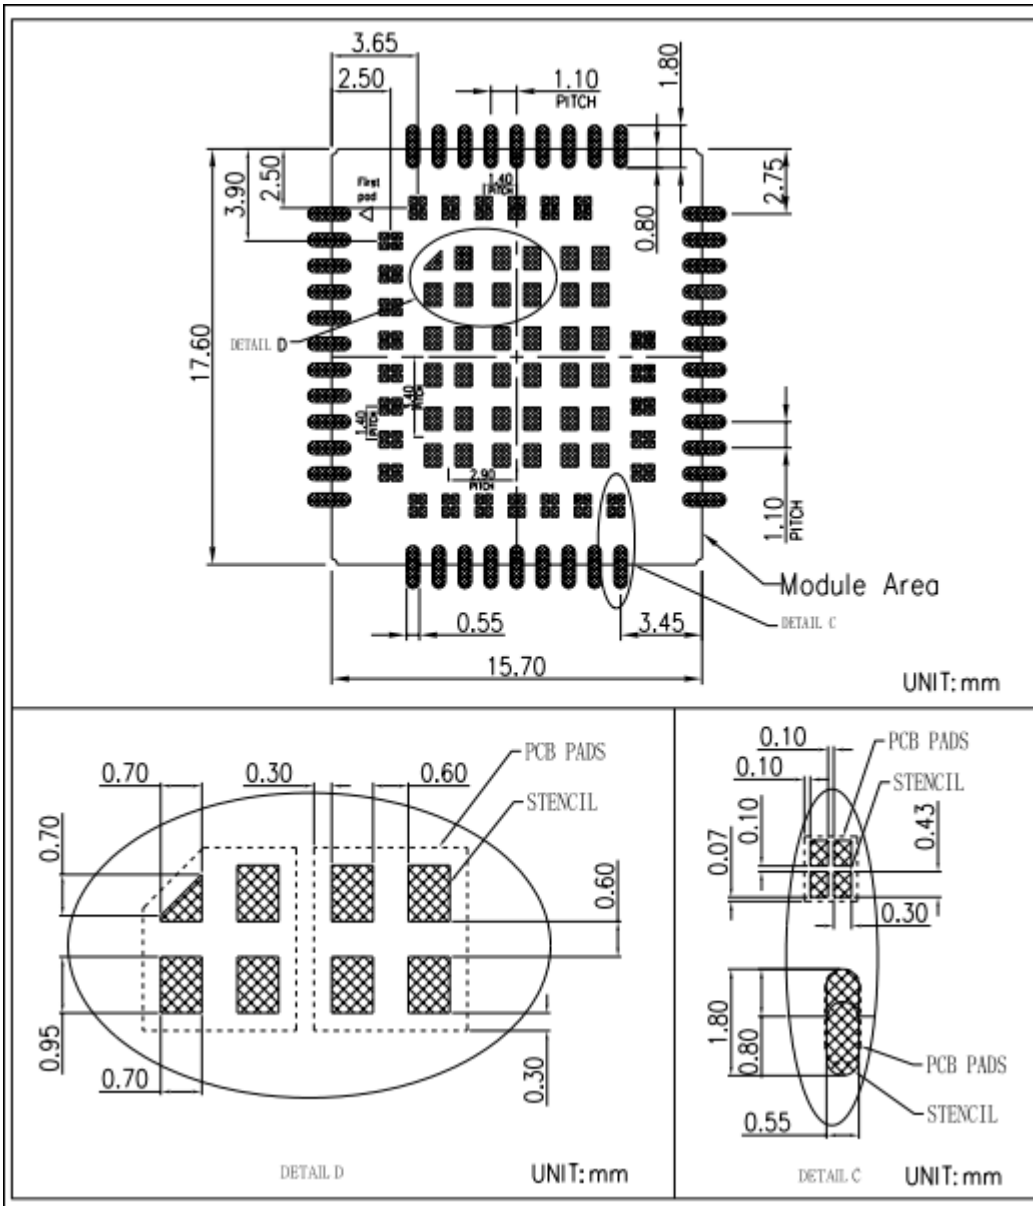


Figure 5: Recommended SMT stencil footprint outline (Unit: mm)

4. Application Interface

4.1. Power Supply

The power supply range of SIM800C-DS is from 3.4V to 4.4V. Recommended voltage is 4.0V. The transmitting burst will cause voltage drop and the power supply must be able to provide sufficient current up to 2A. For the VBAT input, a bypass capacitor (low ESR) such as a 100 μ F is strongly recommended.

For the VBAT input, a 100uF Tantalum capacitor (C_A low ESR) and a 1uF~10uF Ceramics capacitor C_B are strongly recommended. Increase the 33pF and 10pF capacitors can effectively eliminate the high frequency interference. A 5.1V/500mW Zener diode is strongly recommended, the diode can prevent chip from damaging by the voltage surge. These capacitors and Zener diode should be placed as close as possible to SIM800C-DS VBAT pins.

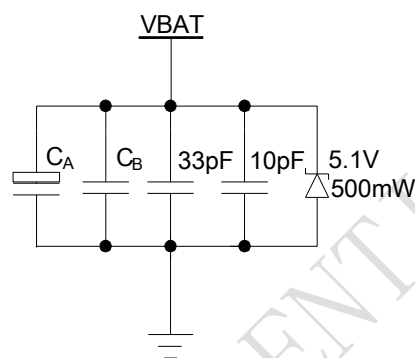


Figure 6: Reference circuit of the VBAT input

Table 6: Recommended zener diode

| | Vendor | Part number | Power(watts) | Packages |
|---|---------|--------------|--------------|----------|
| 1 | On semi | MMSZ5231BT1G | 500mW | SOD123 |
| 2 | Prisemi | PZ3D4V2H | 500mW | SOD323 |
| 3 | Vishay | MMSZ4689-V | 500mW | SOD123 |
| 4 | Crownpo | CDZ55C5V1SM | 500mW | 0805 |

The following figure is the reference design of +5V input power supply. The output power supply is 4.1V, thus a linear regulator can be used.

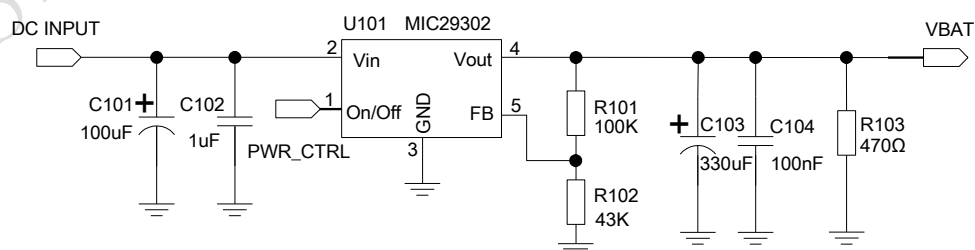


Figure 7: Reference circuit of the LDO power supply

If there is a high drop-out between the input and the desired output (VBAT), a DC-DC power supply will be preferable because of its better efficiency especially with the 2A peak current in burst mode of the module. The

following figure is the reference circuit.

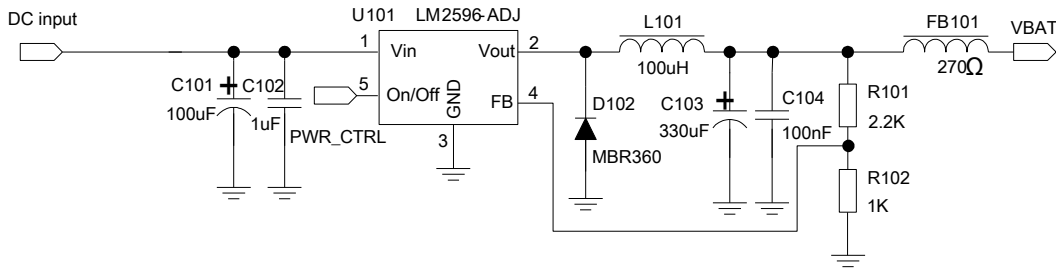


Figure 8: Reference circuit of the DC-DC power supply

The single 3.7V Li-ion cell battery can be connected to SIM800C-DS VBAT pins directly. But the Ni-Cd or Ni-MH battery must be used carefully, since their maximum voltage can rise over the absolute maximum voltage of the module and damage it.

When battery is used, the total impedance between battery and VBAT pins should be less than 150mΩ. The following figure shows the VBAT voltage drop at the maximum power transmit phase, and the test condition is as following:

- VBAT=4.0V,
- A VBAT bypass capacitor $C_A=100\mu\text{F}$ tantalum capacitor (ESR=0.7Ω),
- Another VBAT bypass capacitor $C_B=1\mu\text{F}\sim 10\mu\text{F}$.

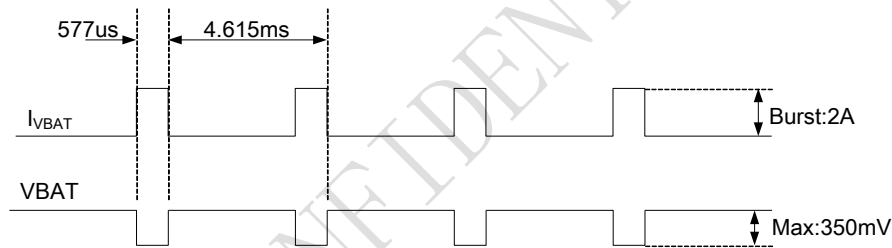


Figure 9: VBAT voltage drop during transmit burst

4.1.1. Power Supply Pin

Pin34 and Pin35 are VBAT input, Pin36 and Pin37 are GND of power supply, and VRTC pin is power supply of the RTC circuit in the module. VDD_EXT output 2.8V when module is in normal operation mode.

When designing the power supply in customers’ application, pay special attention to power losses. Ensure that the input voltage never drops below 3.0V even when current consumption rises to 2A in the transmit burst. If the power voltage drops below 3.0V, the module may be shut down automatically. The PCB traces from the VBAT pins to the power supply must be wide enough (at least 60mil) to decrease voltage drops in the transmit burst. The power IC and the bypass capacitor should be placed to the module as close as possible.



Figure 10: The minimal VBAT voltage requirement at VBAT drop

Note: Hardware power off voltage is 3.0V.

4.1.2. Monitoring Power Supply

AT command “AT+CBC” can be used to monitor the VBAT voltage. For detail, please refer to *document [1]*.

4.2. Power on/off SIM800C-DS

4.2.1. Power on SIM800C-DS

Customer can power on SIM800C-DS by pulling down the PWRKEY pin for at least 1 second and release. This pin is already pulled up to 3V in the module internal, so external pull up is not necessary. Reference circuits are shown as below.

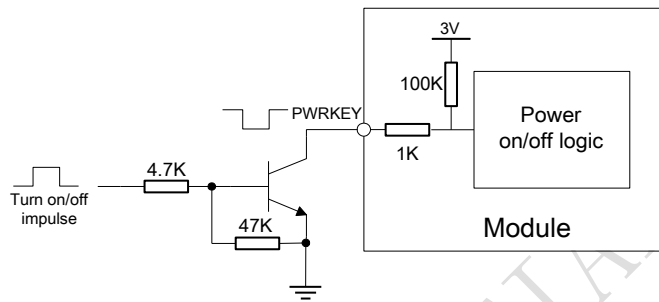


Figure 11: Powered on/down module using transistor

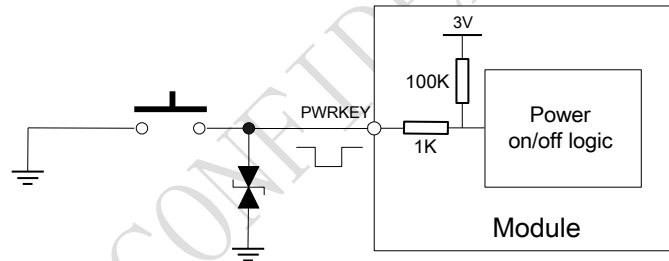


Figure 12: Powered on/down module using button

The power on timing is illustrated as in the following figure.

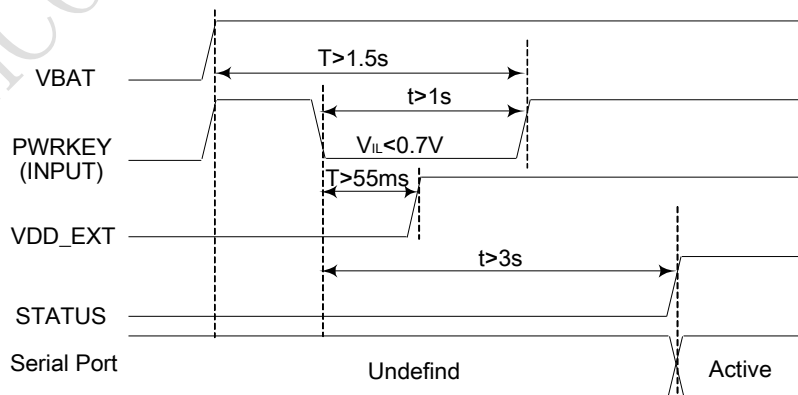


Figure 13: Timing of power on module

When power on procedure is completed, SIM800C-DS will send following URC to indicate that the module is ready to operate at fixed baud rate.

RDY

This URC does not appear when autobauding function is active.

Note: Customer can use AT command “AT+IPR=x” to set a fixed baud rate and save the configuration to non-volatile flash memory. After the configuration is saved as fixed baud rate, the Code “RDY” should be received from the serial port every time when SIM800C-DS is powered on. For details, please refer to the chapter “AT+IPR” in document [1].

4.2.2. Power off SIM800C-DS

SIM800C-DS will be powered off in the following situations:

- Normal power off procedure: power off SIM800C-DS by the PWRKEY pin.
- Normal power off procedure: power off SIM800C-DS by AT command “AT+CPOWD=1”.

4.2.2.1. Power off SIM800C-DS by the PWRKEY Pin

Customer can power off SIM800C-DS by pulling down the PWRKEY pin for at least 1.5 second and release. Please refer to the power on circuit. The power off timing is illustrated in the following figure.

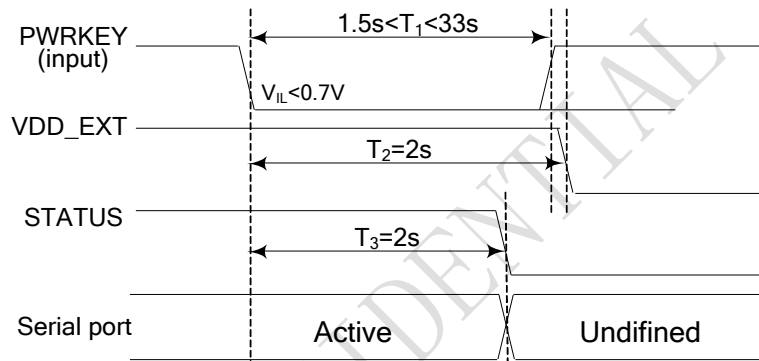


Figure 14: Timing of power off SIM800C-DS by PWRKEY

Note:

1. the module will restart after pull down the pwrkey over 33 seconds.
2. VDD_EXT will power off after STATUS change into low level and the PWRKEY release 55ms..
 If $1.5s < T_1 < 2s$, $T_2 > 2s$;
 If $2s \leq T_1 < 33s$, $T_2 > T_1 + 55ms$

This procedure makes the module log off from the network and allows the software to enter into a secure state to save data before completely shut down.

Before the completion of the power off procedure, the module will send URC:

NORMAL POWER OFF

At this moment, AT commands cannot be executed any more. Power off mode can also be indicated by STATUS pin, which is at low level at this time.

4.2.2.2. Power off SIM800C-DS by AT Command

SIM800C-DS can be powered off by AT command “AT+CPOWD=1”. This procedure makes the module log off from the network and allows the software to enter into a secure state to save data before completely shut down.

Before the completion of the power off procedure, the module will send URC:

NORMAL POWER OFF

At this moment, AT commands can not be executed any more. Power off mode can also be indicated by STATUS

pin, which is at low level at this time.

For detail about AT command “AT+CPOWD”, please refer to *document [1]*.

4.2.2.3. Restart SIM800C-DS by PWRKEY Pin:

When the module works normally, if the customer wants to restart the module, follow the procedure below:

- 1) Power off the module.
- 2) Wait for at least 800ms after STATUS pin changed to low level.
- 3) Power on the module.

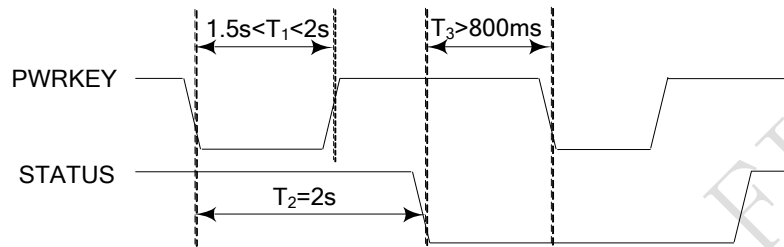


Figure 15: Timing of restart SIM800C-DS

4.3. Power Saving Mode

SIM800C-DS has two power saving modes: Minimum functionality mode and sleep mode. AT command “AT+CSCLK=1” can be used to set SIM800C-DS into sleep mode. AT command “AT+CFUN=<fun>” can be used to set SIM800C-DS into minimum functionality. When SIM800C-DS is in sleep mode and minimum functionality mode, the current of module is lowest.

4.3.1. Minimum Functionality Mode

There are three functionality modes, which could be set by AT command “AT+CFUN=<fun>“. The command provides the choice of the functionality levels <fun>=0, 1, 4.

- AT+CFUN=0: Minimum functionality.
- AT+CFUN=1: Full functionality (default).
- AT+CFUN=4: Flight mode (disable RF function).

Table 7: The current consumption of Function Mode

| <fun> | BS-PA-MFRMS | Current consumption(mA) |
|-------|-------------|-------------------------|
| 0 | / | 0.8 |
| 1 | 9 | 0.93 |
| | 5 | 1.06 |
| | 2 | 1.6 |
| 4 | / | 0.76 |

Minimum functionality mode minimizes the current consumption to the lowest level. If SIM800C-DS is set to minimum functionality by “AT+CFUN=0”, the RF function and SIM card function will be disabled. In this case, the serial port is still accessible, but partial AT commands and correlative to RF function and SIM card function will not be accessible.

For detailed information about AT command “AT+CFUN=<fun>“, please refer to *document [1]*.

4.3.2. Sleep Mode 1 (AT+CSCLK=1)

Customer can control SIM800C-DS module to enter or exit the sleep mode (AT+CSCLK=1) by DTR signal. When DTR is in high level and without interrupt (on air and hardware such as GPIO interrupt or data in serial port), SIM800C-DS will enter sleep mode automatically. In this mode, SIM800C-DS can still receive paging or SMS from network but the serial port is not accessible.

4.3.3. Wake Up SIM800C-DS from Sleep Mode 1

When SIM800C-DS is in sleep mode 1(AT+CSCLK=1), the following methods can wake up the module:

- Pull down DTR pin.
The serial port will be active after DTR pin is pulled to low level for about 50ms.
- Receive a voice or data call from network.
- Receive a SMS from network.
- Receive external interrupt.

Note: After module has received incoming call or new SMS, serial port can report URC, but the serial port can not input AT command. Only after the DTR pin is pulled to low level for 50ms, the serial port can input AT command.

4.3.4. Sleep Mode 2 (AT+CSCLK=2)

In this mode, SIM800C-DS will continuously monitor the serial port data signal. When there is no data transfer over 5 seconds on the RXD signal and there is no on air and hardware interrupts (such as GPIO interrupt), SIM800C-DS will enter sleep mode 2 automatically. In this mode, SIM800C-DS can still receive paging or SMS from network.

4.3.5. Wake Up SIM800C-DS from Sleep Mode 2

When SIM800C-DS is in sleep mode 2 (AT+CSCLK=2), the following methods can wake up the module:

- Send data to SIM800C-DS via main serial port (the first character will lose).
- Receive a voice or data call from network.
- Receive a SMS from network.

Note: Autobauding is default. It cannot enter sleep mode in the absence of synchronous serial port baud rate after module power on.

4.4. Power Saving Mode

Current input for RTC when the VBAT is not supplied for the system. Current output for backup battery when the VBAT power supply is in present and the backup battery is in low voltage state. The RTC power supply of module can be provided by an external capacitor or a battery (non-chargeable or rechargeable) through the VRTC. The following figures show various reference circuits for RTC back up.

- External capacitor backup

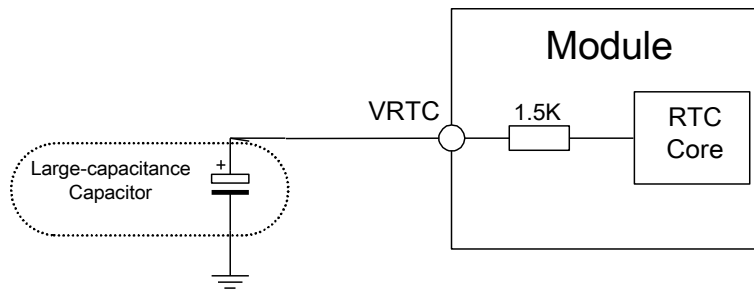


Figure 16: RTC supply from capacitor

- Non-chargeable battery backup

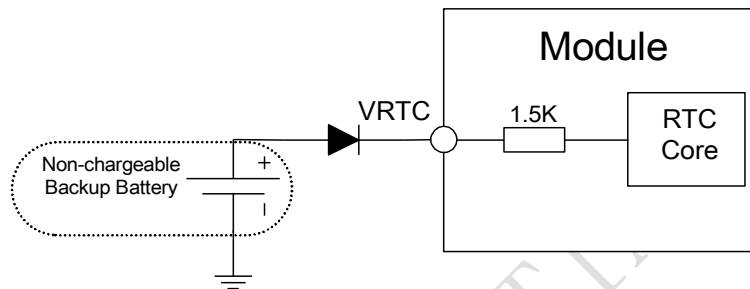


Figure 17: RTC supply from non-chargeable battery

- Rechargeable battery backup

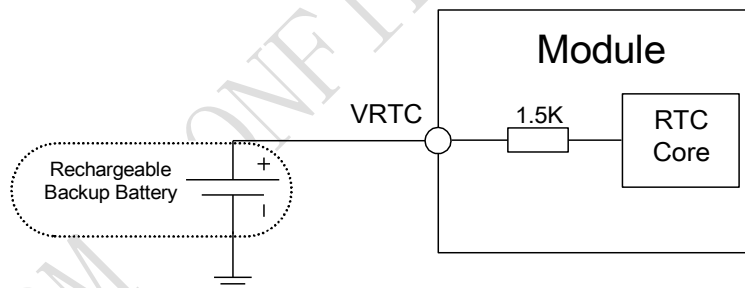


Figure 18: RTC supply from rechargeable battery

Note: When shut off VBAT and power on VRTC only, the clock error becomes larger.

4.5. Serial Port and USB Interface

SIM800C-DS default provides one unbalanced asynchronous serial ports. The module is designed as a DCE (Data Communication Equipment). The following figure shows the connection between module and client (DTE).

Table 8: Serial port and USB pin definition

| | Pin name | Pin number | Function |
|-------------|-----------|------------|---------------------|
| Serial port | UART1_DTR | 6 | Data terminal ready |
| | UART1_RI | 7 | Ring indicator |
| | UART1_DCD | 5 | Data carrier detect |

| | | | |
|------------|-----------|----|----------------------|
| | UART1_CTS | 4 | Clear to send |
| | UART1_RTS | 3 | Request to send |
| | UART1_TXD | 1 | Transmit data |
| | UART1_RXD | 2 | Receive data |
| | UART2_TXD | 22 | Transmit data |
| | UART2_RXD | 23 | Receive data |
| Debug port | USB_VBUS | 24 | USB power supply |
| | USB_DP | 25 | D+ data input/output |
| | USB_DM | 26 | D- data input/output |

Note: Hardware flow control is disabled by default. AT command “AT+IFC=2, 2” can enable hardware flow control. AT command “AT+IFC=0, 0” can disable hardware flow control. For more details please refer to document [1].

Table 9: Serial port characteristics

| Symbol | Min | Max | Unit |
|-----------------|------|-----|------|
| V _{IL} | -0.3 | 0.7 | V |
| V _{IH} | 2.1 | 3.0 | V |
| V _{OL} | - | 0.4 | V |
| V _{OH} | 2.4 | - | V |

4.5.1 Function of Serial Port

Serial port:

- Full mode device.
- Contain data lines UART1_TXD/UART1_RXD, hardware flow control lines UART1_RTS/UART1_CTS, status lines UART1_DTR、UART1_DCD and UART1_RI.
- Serial port can be used for GPRS service and AT communication. It can also be used for multiplexing function. For details about multiplexing function, please refer to *table 11*.
- Autobauding supports the following baud rates:
1200, 2400, 4800, 9600, 19200, 38400, 57600 and 115200bps

Autobauding allows SIM800C-DS to automatically detect the baud rate of the host device. Pay more attention to the following requirements:

- **Synchronization between DTE and DCE:**
When DCE powers on with autobauding enabled, it is recommended to send "AT" or "at" or "aT" or "At" to synchronize the baud rate, until DTE receives the "OK" response, which means DTE and DCE are correctly synchronized. For more information please refer to AT command "AT+IPR".
- **Restrictions of autobauding operation:**
The DTE serial port must be set at 8 data bits, no parity and 1 stop bit.
The URC such as "RDY", "+CFUN: 1" and "+CPIN: READY" will not be reported.

Note: Customer can use AT command “AT+IPR=x” to set a fixed baud rate and the setting will be saved to non-volatile flash memory automatically. After the configuration is set as fixed baud rate, the URC such as "RDY", "+CFUN: 1" and "+CPIN: READY" will be reported when SIM800C-DS is powered on.

4.5.2 Serial Interfaces

The following figure shows the connection between module and client (DTE).

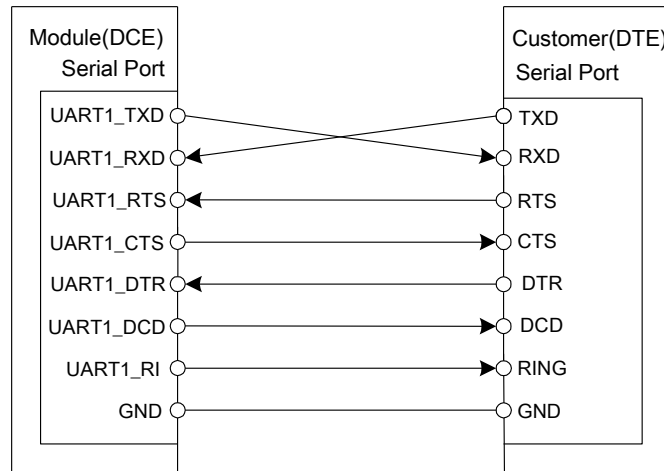


Figure 19: Connection of the serial interfaces

If the voltage of UART is 3.3V, the following reference circuits are recommended. If the voltage is 3.0V, please change the resistors in the following figure from 5.6K to 14K.

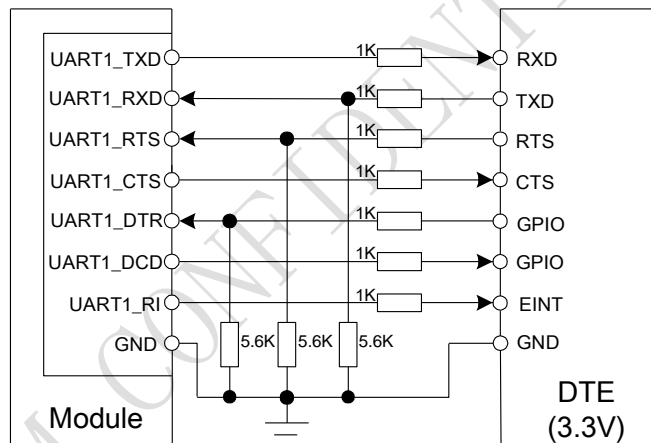


Figure 20: Resistor matching circuit

If the voltage of UART is 3V or 3.3V, the following reference circuits are recommended:

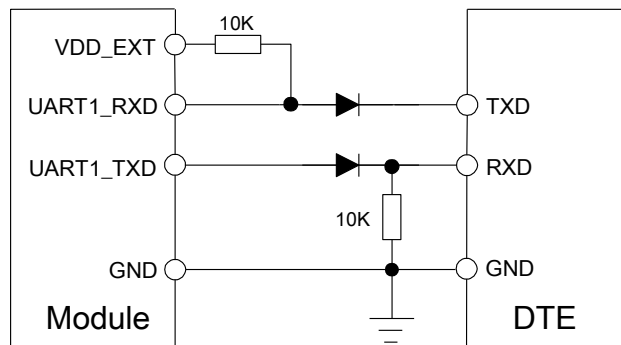


Figure 21 : Diode isolation circuit

Note: please make sure the minimum of client high limit should be less than 2.8V minus the diode drop.

If the voltage of UART is 5V, the following reference circuits are recommended:

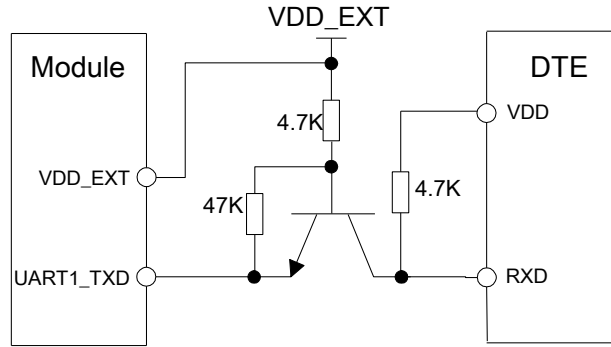


Figure 22: TX level matching circuit

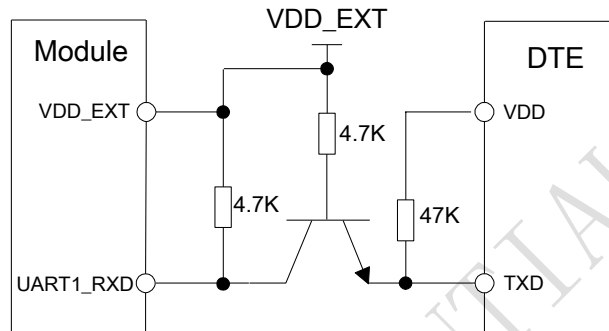


Figure 23: RX level matching circuit

4.5.3 Debug Interface

SIM800C-DS could achieve software debug function through USB interface. When powering on the module, connect USB_VBUS, USB_DP, USB_DM, and GND to PC, then install the driver following the prompts, a UART port could be recognized by PC, customer could achieve the software Debug with this UART port.

SIMCom recommended the following connected diagram:

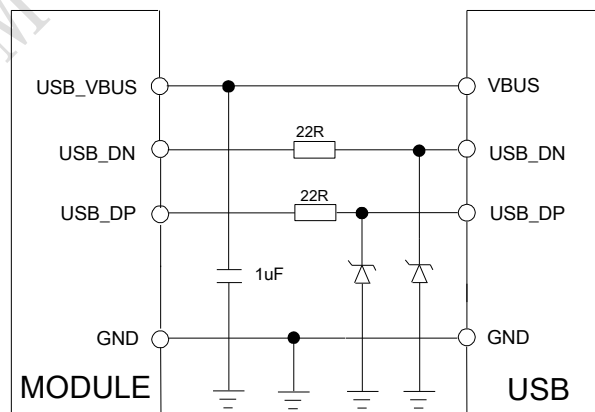


Figure 24: USB reference circuit

The TVS on USB data line should be less than 5pF, and traced by differential forms.

Note: please reserve the USB interface or test point for the further debugging

Table 10: USB_VBUS operation voltage


| Pin | Min | Typ | Max | Unit |
|----------|-----|-----|-----|------|
| USB_VBUS | 4.3 | 5.0 | 7.0 | V |

4.5.4 Software Upgrade

Customer could upgrade module's firmware through USB or UART interface.

If upgrading through USB interface, it is necessary to power on SIM800C-DS first, and then connect USB_VBUS, USB_DP, USB_DM, and GND to PC. There is no need to operate PWRKEY pin in the whole procedure, when SIM800C-DS detects USB_VBUS and could communicate normally with USB_DP and USB_DM, it will enter USB download mode automatically.

If customer upgrades the software through UART interface, it is strongly recommended to lead the UART1_TXD, UART1_RXD, GND and PWRKEY pin to IO connector for the upgrading, and PWRKEY pin should connect to GND while upgrading. Refer to the following figure for debugging and upgrading software.

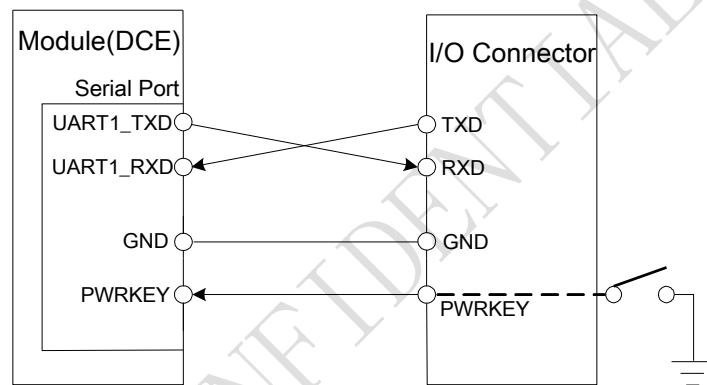
Figure 25: Connection for software upgrading and debugging

The UART interface supports the CMOS level. If customer connects the module to the computer, the level shifter should be added between the DCE and DTE.

4.6. UART1_RI Behaviors

Table 11: RI behaviors

| State | RI response |
|------------|---|
| Standby | High |
| Voice call | The pin is changed to low. When any of the following events occur, the pin will be changed to high: (1) Establish the call (2) Hang up the call |
| SMS | The pin is changed to low, and kept low for 120ms when a SMS is received. Then it is changed to high. |
| Others | For more details, please refer to <i>document [2]</i> . |

The behavior of the RI pin is shown in the following figure when the module is used as a receiver.

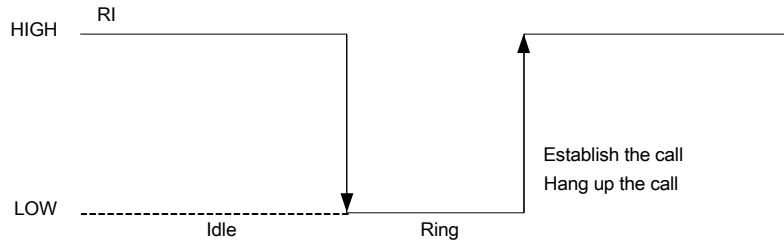


Figure 26: UART1_RI behaviour of voice calling as a receiver

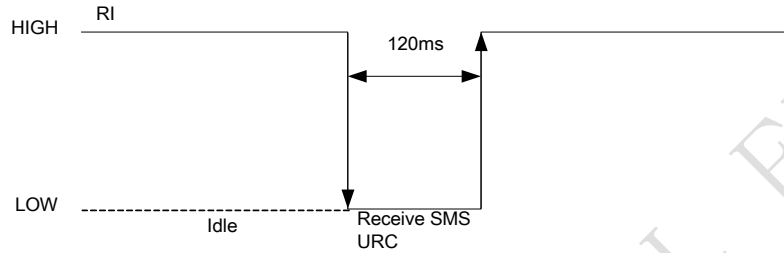


Figure 27: UART1_RI behaviour of URC or receive SMS

However, if the module is used as caller, the UART1_RI will remain high. Please refer to the following figure.

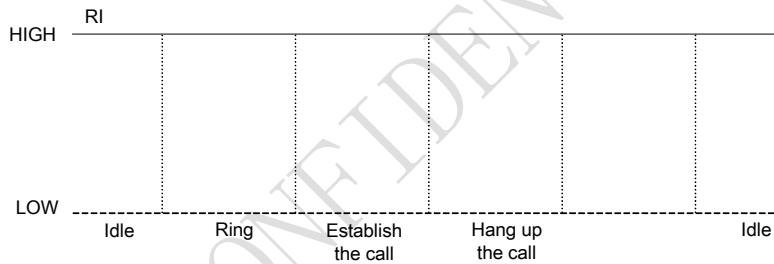


Figure 28: UART1_RI behaviour as a caller

4.7. Audio Interfaces

SIM800C-DS provides an analog input (MICP; MICN), which could be used for electret microphone. The module also provides two analog output (SPK1P/2P; SPK1N/2N).

Table 12: Audio interface definition

| Pin name | Pin number | Function |
|----------|------------|-----------------------|
| MICP | 9 | Audio input positive |
| MICN | 10 | Audio input negative |
| SPK1P | 11 | Audio output positive |
| SPK1N | 12 | Audio output negative |
| SPK2P | 44 | Audio output positive |
| SPK2N | 43 | Audio output negative |

SPK1P/1N output can directly drive 32Ω receiver.

SIM800C-DS internal has class-AB audio amplifier, the following table is class-AB performance:

Table 13: Performance of audio amplifier

| Test Conditions | Class-AB AMP |
|-------------------|--------------|
| 4.2V 8Ω THD+N=1% | 0.87W |
| 3.3V 8Ω THD+N=1% | 0.53W |
| 4.2V 8Ω THD+N=10% | 1.08W |
| 3.3V 8Ω THD+N=10% | 0.65W |

SPK2P/2N output can directly drive 8Ω speaker.

AT command “AT+CMIC” is used to adjust the input gain level of microphone. AT command “AT+SIDET” is used to set the side-tone level. In addition, AT command “AT+CLVL” is used to adjust the output gain level. For more details, please refer to *document [1]*.

In order to improve audio performance, the following reference circuits are recommended. The audio signals have to be layout according to differential signal layout rules as shown in following figures.

4.7.1. Speaker Interfaces Configuration

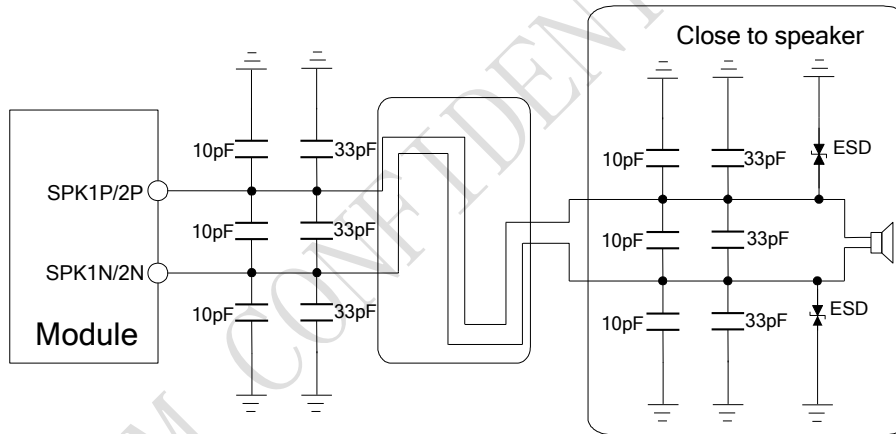


Figure 29: Speaker reference circuit

4.7.2. Microphone Interfaces Configuration

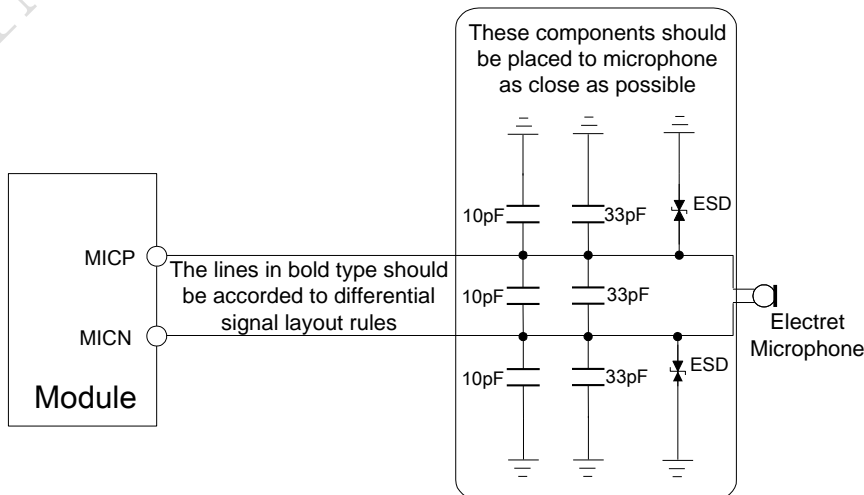


Figure 30: Microphone reference circuit

4.7.3. Audio Electronic Characteristic

Table 14: Microphone input characteristics

| Parameter | Min | Typ | Max | Unit |
|-------------------------------|---------------------|-----|-----|------------|
| Microphone biasing voltage | - | 1.9 | 2.2 | V |
| Working current | - | - | 2.0 | mA |
| Input impedance(differential) | 13 | 20 | 27 | K Ω |
| Idle channel noise | - | - | -67 | dBm0 |
| SINAD | Input level:-40dBm0 | 29 | - | dB |
| | Input level:0dBm0 | - | 69 | dB |

Table 15: Audio output characteristics

| Parameter | Conditions | Min | Typ | Max | Unit |
|---------------|--------------------------------------|-----|-----|------|------|
| Normal output | R _L =32 Ω receiver | - | 15 | 90 | mW |
| | R _L =8 Ω speaker | - | - | 1080 | mW |

4.7.4. TDD

Audio signal could be interferenced by RF signal. Coupling noise could be filtered by adding 33pF and 10pF capacitor to audio lines. 33pF capacitor could eliminate noise from GSM850/EGSM900MHz, while 10pF capacitor could eliminate noise from DCS1800/PCS1900Mhz frequency. Customer should develop this filter solution according to field test result.

GSM antenna is the key coupling interfering source of TDD noise. Thereat, pay attention to the layout of audio lines which should be far away from RF cable, antenna and VBAT pin. The bypass capacitor for filtering should be placed near module and another group needs to be placed near to connector.

Conducting noise is mainly caused by the VBAT drop. If audio PA was powered by VBAT directly, then there will be some cheep noise from speaker output easily. So it is better to put big capacitors and ferrite beads near audio PA input.

TDD noise has something to do with GND signal. If GND plane is not good, lots of high-frequency noises will interference microphone and speaker over bypass capacitor. So a good GND during PCB layout could avoid TDD noise.

4.8. SIM Card Interface

The SIM interface complies with the GSM Phase 1 specification and the new GSM Phase 2+ specification for FAST 64kbps SIM card. Both 1.8V and 3.0V SIM card are supported. The SIM interface is powered from an internal regulator in the module.

4.8.1. SIM Card Application

Table 16: SIM pin definition

| Pin name | Pin number | Function |
|-----------|------------|--|
| SIM1_VDD | 18 | Voltage supply for SIM card. Support 1.8V or 3V SIM card |
| SIM1_DATA | 15 | SIM data input/output |
| SIM1_CLK | 16 | SIM clock |
| SIM1_RST | 17 | SIM reset |
| SIM1_DET | 14 | SIM card detection |
| SIM2_VDD | 56 | Voltage supply for SIM card. Support 1.8V or 3V SIM card |
| SIM2_DATA | 53 | SIM data input/output |
| SIM2_CLK | 54 | SIM clock |
| SIM2_RST | 55 | SIM reset |
| SIM2_DET | 52 | SIM card detection |

It is recommended to use an ESD protection component such as ST (www.st.com) ESDA6V1-5W6 or ON SEMI (www.onsemi.com) SMF05C. The SIM card peripheral components should be placed close to the SIM card holder. The reference circuit of the 8-pin SIM card holder is illustrated in the following figure.

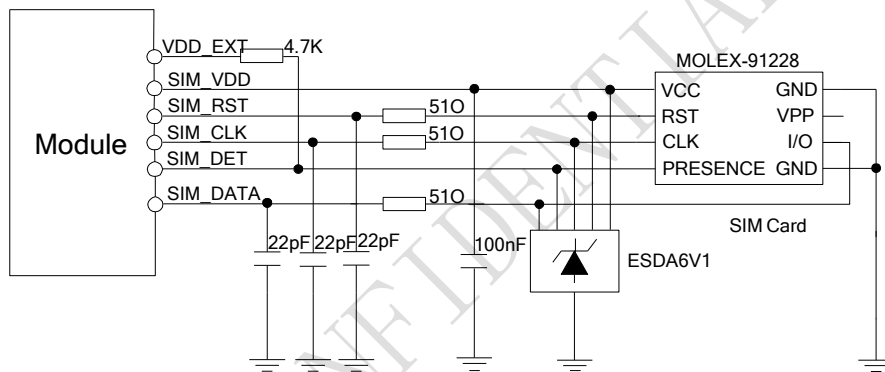


Figure 31: Reference circuit of the 8-pin SIM card holder

The SIM_DET pin is used for detection of the SIM card hot plug in. Customer can select the 8-pin SIM card holder to implement SIM card detection function. AT command “AT+CSDT” is used to enable or disable SIM card detection function. For details of this AT command, please refer to *document [1]*.

If the SIM card detection function is not used, customer can keep the SIM_DET pin open. The reference circuit of 6-pin SIM card holder is illustrated in the following figure.

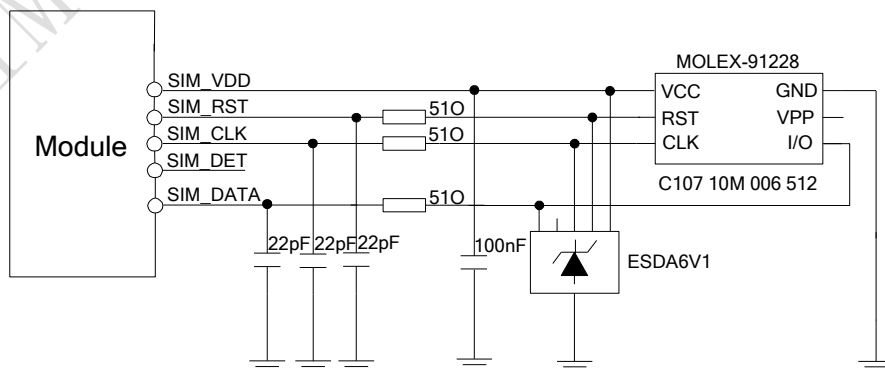


Figure 32: Reference circuit of the 6-pin SIM card holder

4.8.2. SIM Card Design Guide

SIM card signal could be interferenced by some high frequency signal, it is strongly recommended to follow these guidelines while designing:

- SIM card holder should be far away from GSM antenna
- SIM traces should keep away from RF lines, VBAT and high-speed signal lines
- The traces should be as short as possible
- Keep SIM card holder's GND connect to main ground directly
- Shielding the SIM card signal by ground well
- Recommended to place a 100nF capacitor on SIM_VDD line and keep close to the SIM card holder
- Add some TVS which parasitic capacitance should not exceed 50pF
- Add 51Ω resistor to (SIM_RST/SIM_CLK/SIM_DATA) signal could enhance ESD protection
- Add 22pf capacitors to (SIM_RST/SIM_CLK/SIM_DATA) signal to reduce RF interference

4.8.3. Design Considerations for SIM Card Holder

For 8 pins SIM card holder, SIMCom recommends to use Molex 91228. Customer can visit <http://www.molex.com> for more information about the holder.

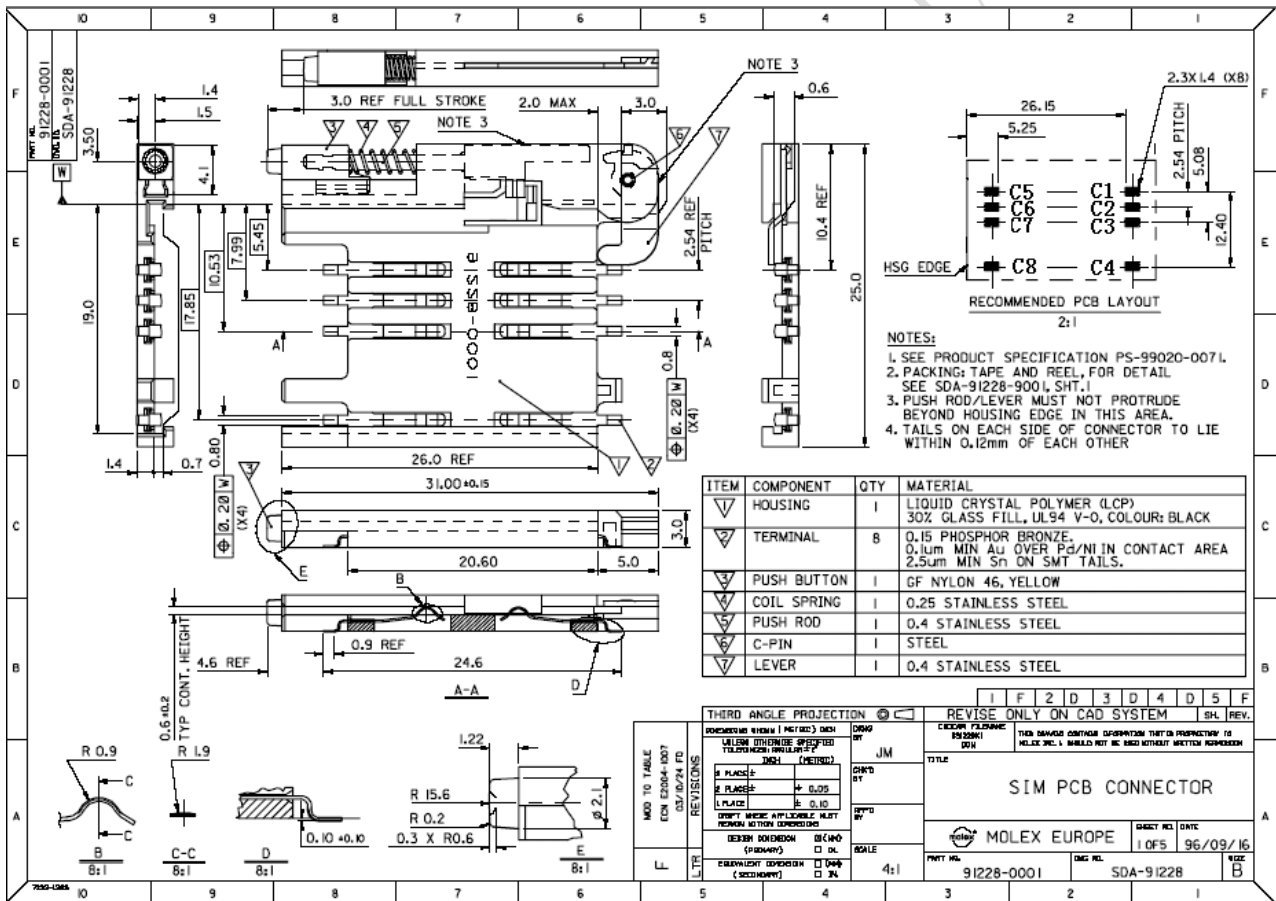


Figure 33: Molex 91228 SIM card holder

Table 17: Pin description (Molex SIM card holder)

| Pin name | Signal | Description |
|----------|---------|-----------------------|
| C1 | SIM_VDD | SIM card power supply |
| C2 | SIM_RST | SIM card reset |
| C3 | SIM_CLK | SIM card clock |

| | | |
|----|----------|--------------------------|
| C4 | GND | Connect to GND |
| C5 | GND | Connect to GND |
| C6 | VPP | Not connect |
| C7 | SIM_DATA | SIM card data I/O |
| C8 | SIM_DET | Detect SIM card presence |

SIMCOM CONFIDENTIAL FILE

For 6-pin SIM card holder, SIMCom recommends to use Amphenol C707 10M006 512 .Customer can visit <http://www.amphenol.com> for more information about the holder.

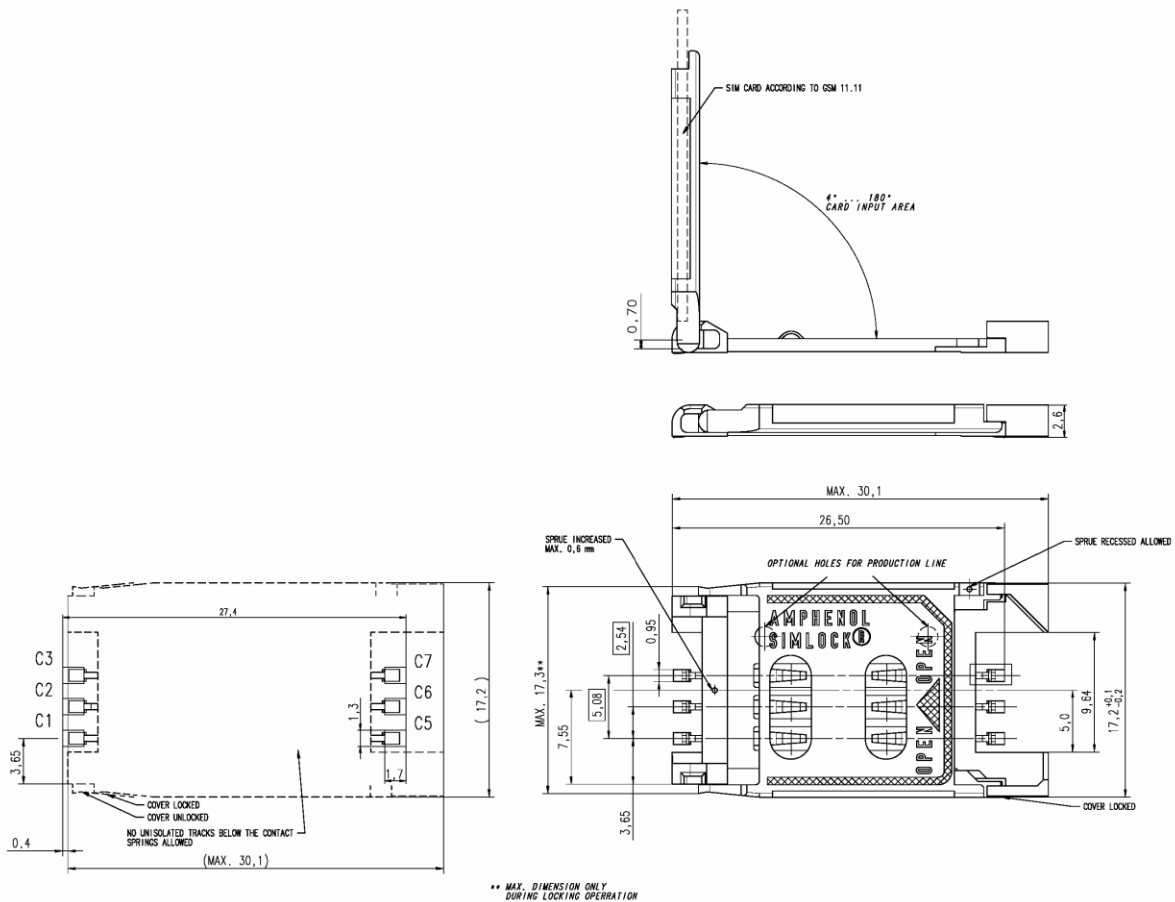


Figure 34: Amphenol C707 10M006 512 SIM card holder

Table 18: Pin description (Amphenol SIM card holder)

| Pin name | Signal | Description |
|----------|----------|-----------------------|
| C1 | SIM_VDD | SIM card power supply |
| C2 | SIM_RST | SIM card reset |
| C3 | SIM_CLK | SIM card clock |
| C5 | GND | Connect to GND |
| C6 | VPP | Not connect |
| C7 | SIM_DATA | SIM card data I/O |

Note: Every time plug SIM card interval advice is greater than 2s. Otherwise may not be able to correct detection.

4.9. PCM Interface

SIM800C-DS provides a hardware PCM interface:

Table 19: PCM pin definition

| Pin name | Pin number | Description |
|----------|------------|-----------------|
| PCM_CLK | 59 | PCM clock |
| PCM_OUT | 62 | PCM data output |
| PCM_SYNC | 61 | PCM synchrony |
| PCM_IN | 60 | PCM data input |

SIM800C-DS PCM interface only supply master mode, data length is 16 bits (linear), and PCM clock rate is 256kHz.

Table 20: PCM specification

| Parameter | Specification |
|-----------------------------|-----------------------------------|
| Line Interface Format | Linear(Fixed) |
| Data length | 16bits(Fixed) |
| PCM Clock/Sync Source | Master Mode(Fixed) |
| PCM Clock Rate | 256kHz(Fixed) |
| PCM Sync Format | Short sync/Long sync both support |
| Zero Padding/Sign extension | Zero Padding(Fixed) |
| Data Ordering | MSB/LSB both support |

Note: Customer can use AT command control PCM interface. For detail, please refer to document [1].

4.9.1. PCM Interface

Refer to the following figure for PCM design:

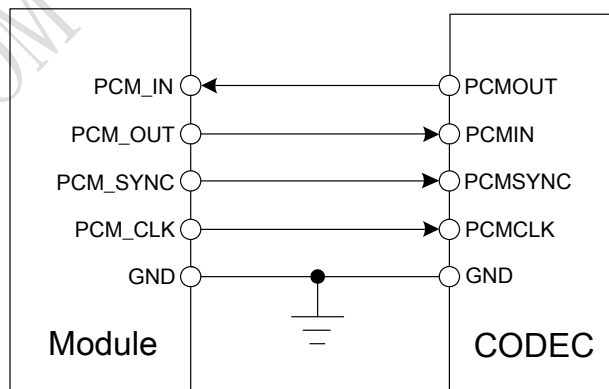


Figure 35: PCM reference circuit

4.10. SD Interface

SIM800C-DS provides a hardware SD interface:

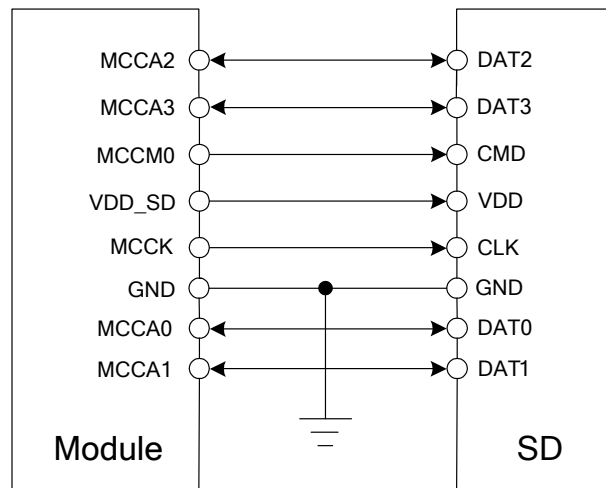


Figure 36: SD reference circuit

If power supply is 2.8V for SD card, customer can use VDD_EXT; if power supply is 3.3V, please use external design LDO.

4.11. I2C Bus

The SIM800C-DS provides an I2C interface which is only used in the embedded AT application.

Table 21: Pin definition of the I2C

| Pin name | Pin number | Description |
|----------|------------|---|
| SCL | 65 | I2C serial bus clock(open drain output) |
| SDA | 64 | I2C serial bus data(open drain output) |

Note: I2C has pulled up to 2.8V via 4.7K internally.

4.12. ADC

Table 22: Pin definition of the ADC

| Pin name | Pin number | Description |
|----------|------------|----------------------|
| ADC | 38 | Analog voltage input |

SIM800C-DS provides an auxiliary ADC, which can be used to measure the voltage. Customer can use AT command “AT+CADC” to read the voltage value.

Note: Customer can use AT command set mode. For detail, please refer to document [1].

Table 23: ADC specification

| Parameter | Min | Typ | Max | Unit |
|----------------|-----|-----|-----|------|
| Voltage range | 0 | - | 2.8 | V |
| ADC Resolution | - | 10 | - | bits |

| | | | | |
|---------------|---|----|--------|-----|
| Sampling rate | - | - | 1.0833 | MHz |
| ADC precision | | 10 | 30 | mV |

4.13. Network Status Indication

Table 24: Pin definition of the NETLIGHT

| Pin name | Pin number | Description |
|----------|------------|---------------------------|
| NETLIGHT | 41 | Network Status Indication |

The NETLIGHT pin can be used to drive a network status indication LED. The status of this pin is listed in following table:

Table 25: Status of the NETLIGHT pin

| Status | SIM800C-DS behavior |
|---------------------|-----------------------------------|
| Off | Powered off |
| 64ms On/ 800ms Off | Not registered the network |
| 64ms On/ 3000ms Off | Registered to the network |
| 64ms On/ 300ms Off | GPRS communication is established |

Reference circuit is recommended in the following figure:

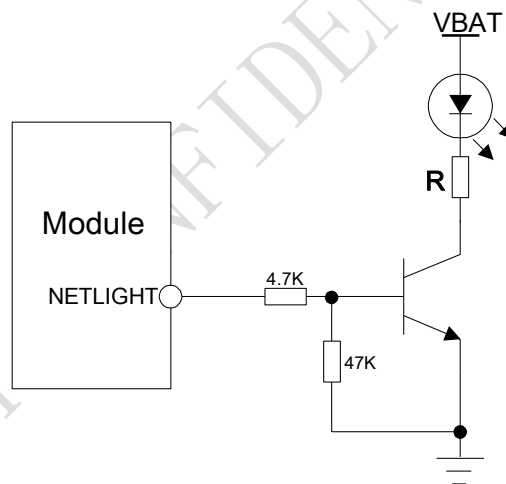


Figure 37: Reference circuit of NETLIGHT

4.14. Operating Status Indication

The pin42 is for operating status indication of the module. The pin output is high when module is powered on, and output is low when module is powered off.

Table 26: Pin definition of the STATUS

| Pin name | Pin number | Description |
|----------|------------|-----------------------------|
| STATUS | 42 | Operating status indication |

Note: For timing about STATUS, please reference to the chapter “4.2 power on/down scenarios”

4.15. RF Synchronization Signal

The synchronization signal is used to indicate incoming GSM burst.

Table 27: Definition of the RF_SYNC pin

| Pin name | Pin number | Description |
|----------|------------|---------------------------------|
| RF_SYNC | 29 | Transmit synchronization signal |

The timing of the synchronization signal is shown below.

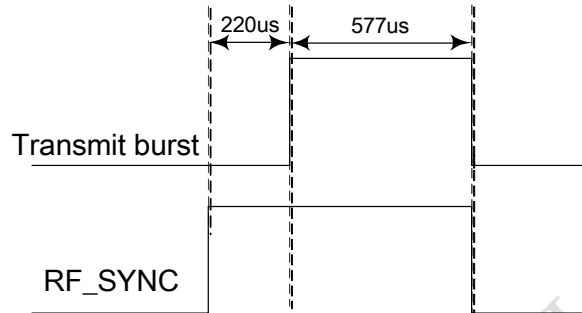


Figure 38: RF_SYNC signal during transmit burst

4.16. Antenna Interface

There are three antenna interfaces, GSM_ANT、BT_ANT and FM_ANT.

- The input impedance of the antenna should be 50Ω , and the VSWR should be less than 2.
- It is recommended that the GSM antenna and the BT antenna should be placed as far as possible.
- The isolations of the two antenna should be bigger than 30dB

NOTE: About the RF trace layout please refer to “AN_SMT Module_RF_Reference_Design_Guide”.

4.16.1. GSM Antenna Interface

SIM800C-DS provides a GSM antenna named GSM_ANT, customer could use 50Ω microstrip line or stripline antenna connect to the module.

It is recommended to reserve the matching circuit as following:

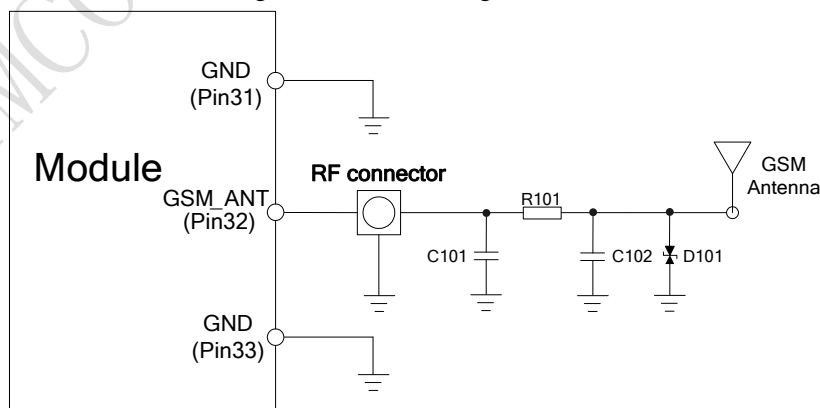


Figure 39: GSM antenna matching circuit

R101, C101, C102 are the matching circuit, the value should be defined by the antenna design. Normally R101 is 0Ω , C101 and C102 are not mounted.

The RF connector is used for conduction test. If the space between RF pin and antenna is not enough, the matching circuit should be designed as in the following figure:

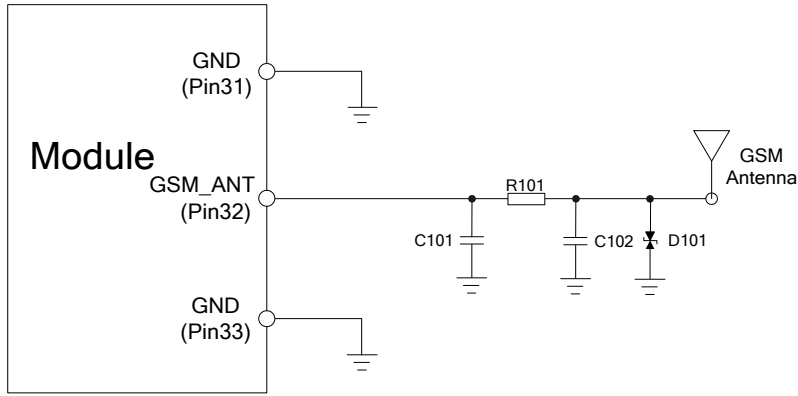


Figure 40: GSM antenna matching circuit without RF connector

In above figure, the components R101, C101 and C102 are used for antenna matching, the value of components can only be got after the antenna tuning, usually, they are provided by antenna vendor. By default, the R101 is 0Ω resistors, and the C101, C102 are reserved for tuning.

The RF test connector in the figure is used for the conducted RF performance test, and should be placed as close as to the module’s antenna pin. The traces impedance between components must be controlled in 50Ω . The component D101 is a bidirectional TVS component, which is used for ESD protection, the recommended part numbers of the TVS are listed in the following table:

Table 28: Recommended TVS component

| Package | Type | Supplier |
|---------|----------------|----------|
| 0201 | LXES03AAA1-098 | Murata |
| 0201 | LXES03AAA1-154 | Murata |
| 0402 | LXES15AAA1-153 | Murata |
| 0402 | LXES15AAA1-100 | Murata |
| 0402 | LXES15AAA1-017 | Murata |

4.16.2. Bluetooth Antenna Interface

It is recommended to reserve the matching circuit as following:

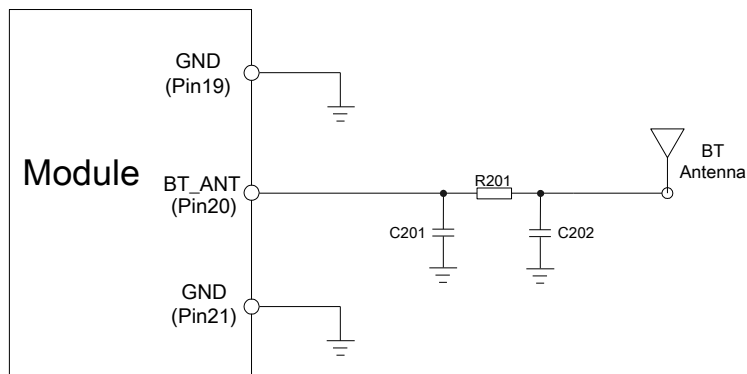


Figure 41: Bluetooth antenna matching circuit

R201, C201, C202 are the matching circuit, the value should be defined by the antenna design. Normally R201 is

0R, C202 and C201 are not mounted.

There are some suggestions for placing components and RF trace for GSM_ANT/BT_ANT:

- The RF connector is used for conducted test, so keep it as close to pin GSM_ANT as possible;
- Antenna matching circuit should be close to the antenna;
- Keep the RF traces impedance as 50Ω;
- The RF traces should be kept far away from the high frequency signals and strong interference source.

4.16.3. FM Antenna Interface

The module provides a FM antenna pad named FM_ANT. The FM antenna interface circuit is recommended as following:

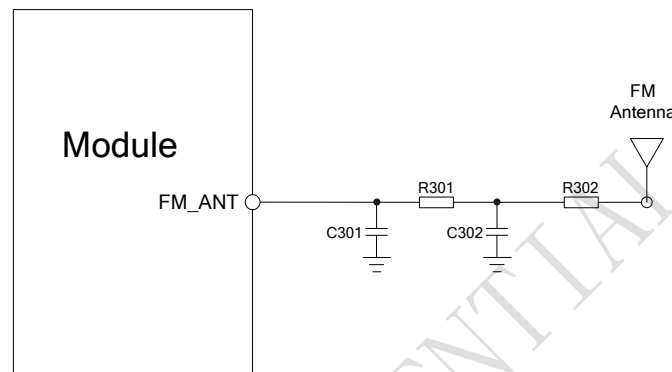


Figure 42: FM antenna matching circuit

Normally, R301\R302 are 0Ω, C301\C302 are not mounted.

The earphone is often used for FM antenna, as an example, the pin GND of the 3.5mm earphone is connected to the FM interface. The circuit is recommended as following:

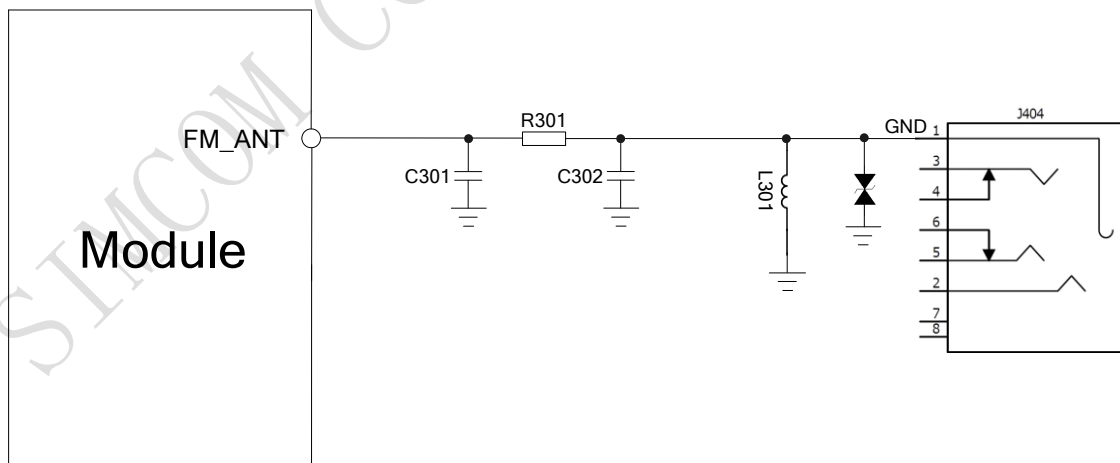


Figure 43: GND pin of the earphone use to be the FM antenna circuit

Normally, R301 is 0Ω, C301\C302\L301 are not mounted.

5. PCB Layout

This section will give some guidelines on PCB layout, in order to eliminate interfere or noise.

5.1 Pin Assignment

Before PCB layout, we should learn about pin assignment in order to get reasonable layout with so many external components. Following figure is the overview of pin assignment of the module.

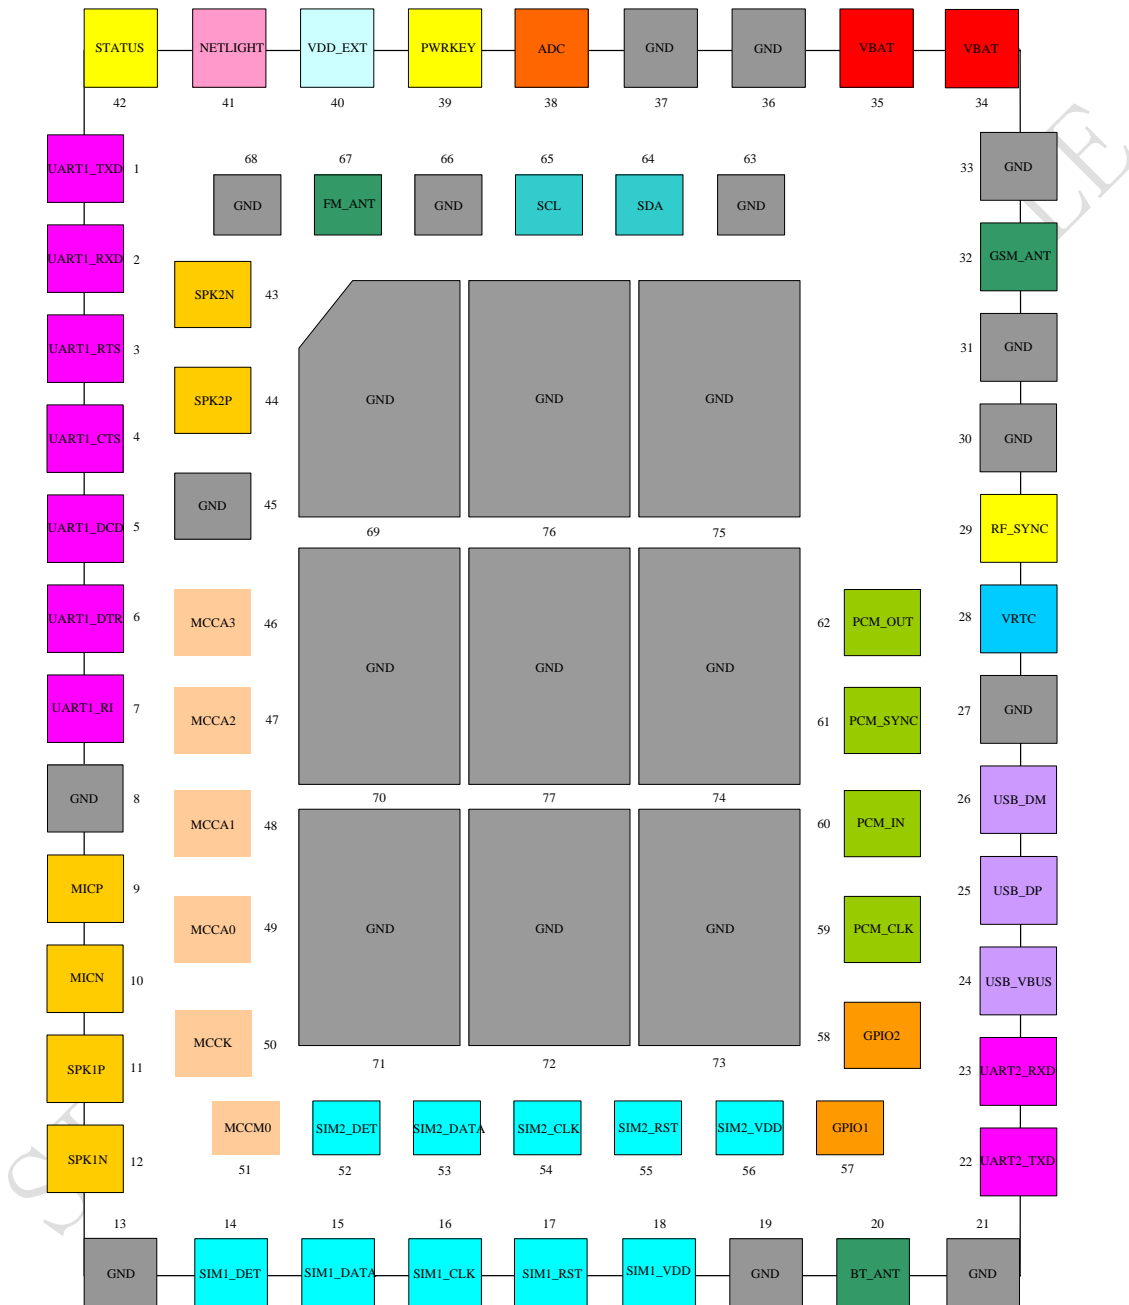


Figure 44: Pin assignment

5.2 Principle of PCB Layout

During layout, attention should be paid to the following interfaces, like Antenna, power supply, SIM card interface, audio interface, and so on.

5.2.1 Antenna Interface

- The length of trace between pin output and connector should be as short as possible;
- Do not trace RF signal over across the board;
- The RF signal should be far away from SIM card, power ICs.

5.2.2 Power Supply

- VBAT and return GND are very important in layout;
- The positive line of VBAT should be as short and wide as possible;
- The correct flow from source to VBAT pin should go though Zener diode then huge capacitor;
- Pin 36 and Pin37 are GND signals, and shortest layout to GND of power source should be designed;
- There are 23 GND pads in the module; these pads could enhance the GND performances. On the upper layer of these pads, do not trace any signal if possible.

5.2.3 SIM Card Interface

- SIM card holder has no anti-EMI component inside. Thus SIM card interface maybe interfered, please pay more attention on this interface during layout;
- Ensure SIM card holder is far way from antenna or RF cable inside;
- Put SIM card holder near the module, as nearer as possible;
- Add ESD component to protect SIM_CLK, SIM_DATA, SIM_RST and SIM_VDD signals which should be far away from power and high-speed-frequency signal.

5.2.4 Audio Interface

- The signal trace of audio should far away from antenna and power;
- The audio signal should avoid to parallel with VBAT trace.

5.2.5 Others

- It is better to trace signal lines of UART bunched, as well as signals of USB.

6. Electrical, Reliability and Radio Characteristics

6.1 Absolute Maximum Ratings

The absolute maximum ratings stated in following table are stress ratings under non-operating conditions. Stresses beyond any of these limits will cause permanent damage to SIM800C-DS.

Table 29: Absolute maximum ratings

| Symbol | Min | Typ | Max | Unit |
|------------------|-----|-----|-----|------|
| VBAT | - | - | 4.5 | V |
| Current | 0 | - | 2.0 | A |
| USB_VBUS | - | - | 7 | V |
| I _I * | - | - | 4 | mA |
| I _O * | - | - | 4 | mA |

*These parameters are for digital interface pins, GPIO, and UART.

6.2 Recommended Operating Conditions

Table 30: Recommended operating conditions

| Symbol | Parameter | Min | Typ | Max | Unit |
|-------------------|-----------------------|-----|-----|-----|------|
| VBAT | Power supply voltage | 3.4 | 4.0 | 4.4 | V |
| T _{OPER} | Operating temperature | -40 | +25 | +85 | °C |
| T _{STG} | Storage temperature | -45 | | +90 | °C |

6.3 Digital Interface Characteristics

Table 31: Digital interface characteristics

| Symbol | Parameter | Min | Typ | Max | Unit |
|-----------------|---------------------------|------|-----|-----|------|
| V _{IH} | High-level input voltage | 2.1 | - | 3 | V |
| V _{IL} | Low-level input voltage | -0.3 | - | 0.7 | V |
| V _{OH} | High-level output voltage | 2.4 | - | - | V |
| V _{OL} | Low-level output voltage | - | - | 0.4 | V |

Note: These parameters are for digital interface pins, such as keypad, GPIO and UART.

6.4 SIM Card Interface Characteristics

Table 32: SIM card interface characteristics

| Symbol | Parameter | Min | Typ | Max | Unit |
|-----------------|--------------------------|------|-----|-----|------|
| I _{IH} | High-level input current | -1.0 | - | 1.0 | uA |
| I _{IL} | Low-level input current | -1.0 | - | 1.0 | uA |
| V _{IH} | High-level input voltage | 1.4 | - | - | V |

| | | | | | |
|-----------------|---------------------------|------|---|------|---|
| | | 2.4 | - | - | V |
| V _{IL} | Low-level input voltage | - | - | 0.27 | V |
| | | | | 0.4 | V |
| V _{OH} | High-level output voltage | 1.62 | - | - | V |
| | | 2.7 | - | - | V |
| V _{OL} | Low-level output voltage | - | - | 0.36 | V |
| | | - | - | 0.4 | V |

6.5 SIM_VDD Characteristics

Table 33: SIM_VDD characteristics

| Symbol | Parameter | Min | Typ | Max | Unit |
|----------------|----------------|-----|-----|-----|------|
| V _O | Output voltage | - | 3.0 | - | V |
| | | - | 1.8 | - | |
| I _O | Output current | - | - | 10 | mA |

6.6 VDD_EXT Characteristics

Table 34: VDD_EXT characteristics

| Symbol | Parameter | Min | Typ | Max | Unit |
|----------------|----------------|-----|-----|-----|------|
| V _O | Output voltage | 2.7 | 2.8 | 2.9 | V |
| I _O | Output current | - | - | 50 | mA |

6.7 VRTC Characteristics

Table 35: VRTC characteristics

| Symbol | Description | Min | Typ | Max | Unit |
|----------------------|---------------------|-----|-----|-----|------|
| V _{RTC-IN} | VRTC input voltage | 1.2 | 2.8 | 3.0 | V |
| I _{RTC-IN} | VRTC input current | - | 3.0 | 5.0 | uA |
| V _{RTC-OUT} | VRTC output voltage | - | 2.8 | - | V |
| I _{RTC-OUT} | VRTC output current | - | | 2.0 | mA |

6.8 Current Consumption (VBAT=4.0V)

Table 36: Current consumption

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------|----------------|-------------------------------------|-----|-----|-----------|----------|
| VBAT | Voltage | | | 4.0 | | V |
| | Power drop | PCL=5 | | | 350 | mV |
| | Voltage ripple | PCL=5 @ f<200kHz @ f>200kHzss | | | 50 2.0 | mV mV |

| | | | | | | |
|--|-----------------|--|---|------|-----|----|
| I _{VBAT} | Average current | Power off mode | | 130 | 150 | uA |
| | | Sleep mode (AT+CFUN=1): (BS-PA-MFRMS=9) (BS-PA-MFRMS=5) (BS-PA-MFRMS=2) | | 0.93 | | mA |
| | | | | 1.06 | | mA |
| | | | | 1.58 | | mA |
| | | Idle mode (AT+CFUN=1): GSM850 EGSM900 DCS1800 PCS1900 | | 12.8 | | mA |
| | | | | 12.8 | | mA |
| | | | | 12.8 | | mA |
| | | | | 12.8 | | mA |
| | | Voice call (PCL=5): GSM850 EGSM900 | | 208 | | mA |
| | | | | 220 | | mA |
| | | | Voice call (PCL=0): DCS1800 PCS1900 | | 141 | |
| | | | | 152 | | mA |
| | | Data mode GPRS (1Rx,4Tx): GSM850 EGSM900 DCS1800 PCS1900 | | | 371 | |
| | 393 | | | mA | | |
| | 267 | | | mA | | |
| | 286 | | | mA | | |
| Data mode GPRS (3Rx,2Tx): GSM850 EGSM900 DCS1800 PCS1900 | | 314 | | mA | | |
| | | 335 | | mA | | |
| | | 204 | | mA | | |
| | | 237 | | mA | | |
| Data mode GPRS (4Rx,1Tx): GSM850 EGSM900 DCS1800 PCS1900 | | 212 | | mA | | |
| | | 223 | | mA | | |
| | | 147 | | mA | | |
| | | 158 | | mA | | |
| I _{MAX} | Peak current | During Tx burst | | | 2.0 | A |

Note: In above table the current consumption value is the typical one of the module tested in laboratory. In the mass production stage, there may be differences among each individual.

6.9 Electro-Static Discharge

SIM800C-DS is an ESD sensitive component, so attention should be paid to the procedure of handling and packaging. The ESD test results are shown in the following table.

Table 37: The ESD characteristics (Temperature: 25°C, Humidity: 45 %)

| Pin name | Contact discharge | Air discharge |
|----------------------|-------------------|---------------|
| VBAT | ±5KV | ±12KV |
| GND | ±6KV | ±12KV |
| UART1_TXD /UART1_RXD | ±4KV | ±8KV |

| | | |
|---------------------|------|-------|
| Antenna port | ±5KV | ±10KV |
| SPKP/SPKN/MICP/MICN | ±4KV | ±8KV |
| PWRKEY | ±4KV | ±8KV |

6.10 Radio Characteristics

6.10.1 Module RF Output Power

The following table shows the module conducted output power, it is followed by the 3GPP TS 05.05 technical specification requirement.

Table 38: GSM850 and EGSM900 conducted RF output power

| GSM850,EGSM900 | | | |
|----------------|----------------------------|-------------------------------|---------|
| PCL | Nominal output power (dBm) | Tolerance (dB) for conditions | |
| | | Normal | Extreme |
| 5 | 33 | ±2 | ±2.5 |
| 6 | 31 | ±3 | ±4 |
| 7 | 29 | ±3 | ±4 |
| 8 | 27 | ±3 | ±4 |
| 9 | 25 | ±3 | ±4 |
| 10 | 23 | ±3 | ±4 |
| 11 | 21 | ±3 | ±4 |
| 12 | 19 | ±3 | ±4 |
| 13 | 17 | ±3 | ±4 |
| 14 | 15 | ±3 | ±4 |
| 15 | 13 | ±3 | ±4 |
| 16 | 11 | ±5 | ±6 |
| 17 | 9 | ±5 | ±6 |
| 18 | 7 | ±5 | ±6 |
| 19-31 | 5 | ±5 | ±6 |

Table 39: DCS1800 and PCS1900 conducted RF output power

| DCS1800,PCS1900 | | | |
|-----------------|----------------------------|-------------------------------|---------|
| PCL | Nominal output power (dBm) | Tolerance (dB) for conditions | |
| | | Normal | Extreme |
| 0 | 30 | ±2 | ±2.5 |
| 1 | 28 | ±3 | ±4 |
| 2 | 26 | ±3 | ±4 |
| 3 | 24 | ±3 | ±4 |
| 4 | 22 | ±3 | ±4 |
| 5 | 20 | ±3 | ±4 |

| | | | |
|----|----|----|----|
| 6 | 18 | ±3 | ±4 |
| 7 | 16 | ±3 | ±4 |
| 8 | 14 | ±3 | ±4 |
| 9 | 12 | ±4 | ±5 |
| 10 | 10 | ±4 | ±5 |
| 11 | 8 | ±4 | ±5 |
| 12 | 6 | ±4 | ±5 |
| 13 | 4 | ±4 | ±5 |
| 14 | 2 | ±5 | ±6 |
| 15 | 0 | ±5 | ±6 |

6.10.2 Module RF Receive Sensitivity

The following table shows the module's conducted receiving sensitivity, it is tested under static condition.

Table 40: Conducted RF receive sensitivity

| Frequency | Receive sensitivity (Typical) | Receive sensitivity(Max) |
|-----------------|-------------------------------|--------------------------|
| GSM850,EGSM900 | < -109dBm | < -107dBm |
| DCS1800,PCS1900 | < -109dBm | < -107dBm |

6.10.3 Module Operating Frequencies

The following table shows the module's operating frequency range; it is followed by the 3GPP TS 05.05 technical specification requirement.

Table 41: Operating frequencies

| Frequency | Receive | Transmit |
|-----------|----------------|----------------|
| GSM850 | 869 ~ 894MHz | 824 ~ 849MHz |
| EGSM900 | 925 ~ 960MHz | 880 ~ 915MHz |
| DCS1800 | 1805 ~ 1880MHz | 1710 ~ 1785MHz |
| PCS1900 | 1930 ~ 1990MHz | 1850 ~ 1910MHz |

7. Manufacturing

7.1. Top and Bottom View of SIM800C-DS

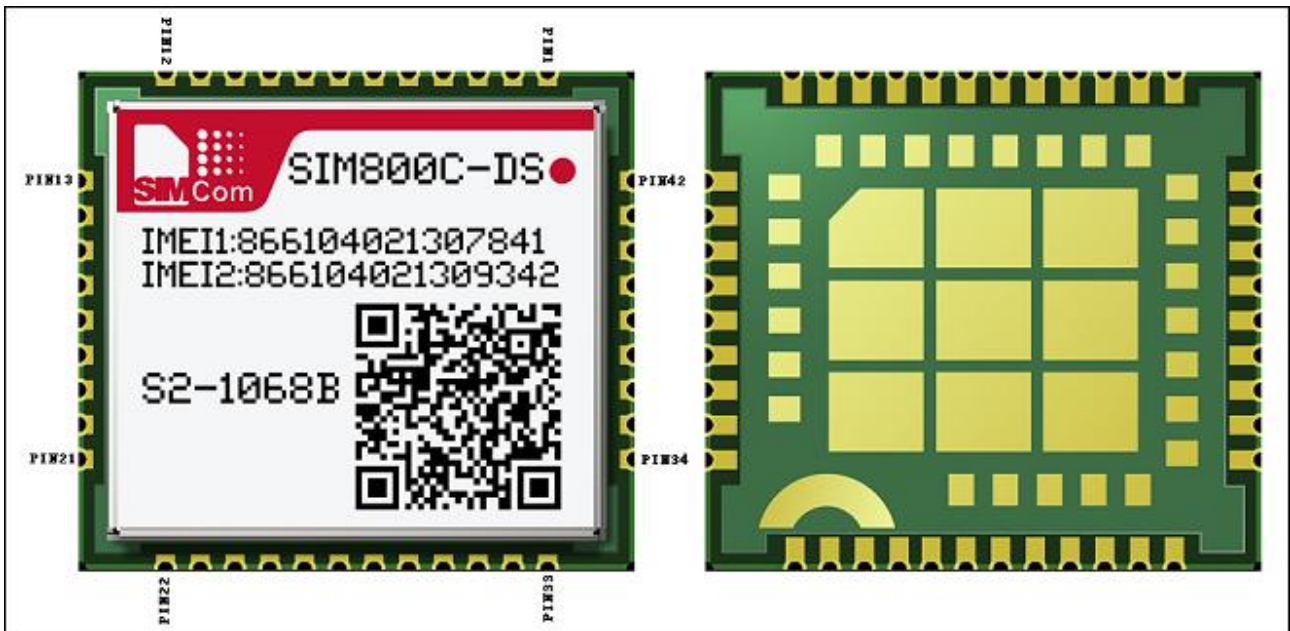


Figure 45: Top and bottom view of SIM800C-DS

7.2. Typical Solder Reflow Profile

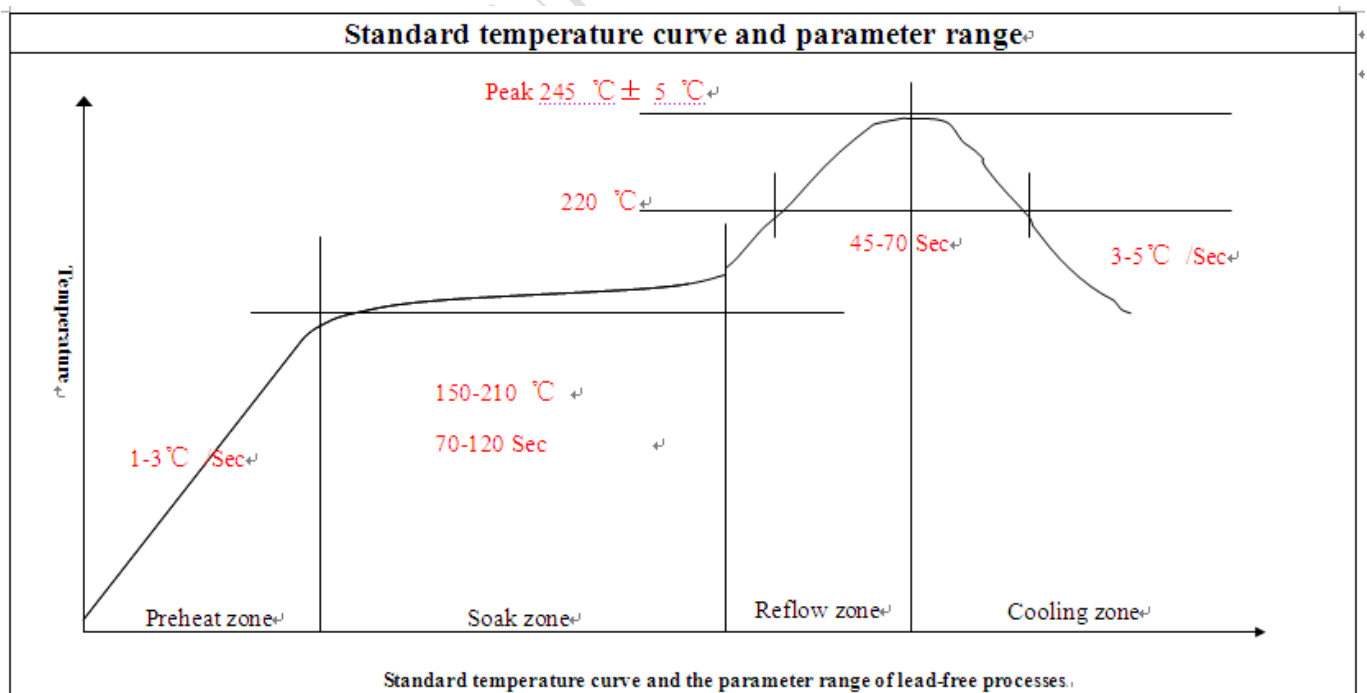


Figure 46: Typical solder reflow profile of lead-free processes

7.3. The Moisture Sensitivity Level

The moisture sensitivity level of SIM800C-DS module is 3. The modules should be mounted within 168 hours after unpacking in the environmental conditions of temperature $<30^{\circ}\text{C}$ and relative humidity of $<60\%$ (RH). It is necessary to bake the module if the above conditions are not met:

Table 42: Moisture sensitivity level and floor life

| Moisture Sensitivity Level (MSL) | Floor Life (out of bag) at factory ambient $\leq 30^{\circ}\text{C}/60\%$ RH or as stated |
|----------------------------------|--|
| 1 | Unlimited at $\leq 30^{\circ}\text{C}/85\%$ RH |
| 2 | 1 year |
| 2a | 4 weeks |
| 3 | 168 hours |
| 4 | 72 hours |
| 5 | 48 hours |
| 5a | 24 hours |
| 6 | Mandatory bake before use. After bake, it must be reflowed within the time limit specified on the label. |

NOTES:

For product handling, storage, processing, IPC / JEDEC J-STD-033 must be followed.

7.4. Baking Requirements

SIM800C-DS modules are vacuum packaged, and guaranteed for 6 months storage without opening or leakage under the following conditions: the environment temperature is lower than 40°C , and the air humidity is less than 90%.

If the condition meets one of the following ones shown below, the modules should be baked sufficiently before re-flow soldering, and the baking condition is shown in below table; otherwise the module will be at the risk of permanent damage during re-flow soldering.

- If the vacuum package is broken or leakage;
- If the vacuum package is opened after 6 months since it's been packed;
- If the vacuum package is opened within 6 months but out of its Floor Life at factory ambient $\leq 30^{\circ}\text{C}/60\%$ RH or as stated.

Table 43: Baking requirements

| Baking temperature | Moisture | Time |
|---|----------|-----------|
| $40^{\circ}\text{C} \pm 5^{\circ}\text{C}$ | $<5\%$ | 192 hours |
| $120^{\circ}\text{C} \pm 5^{\circ}\text{C}$ | $<5\%$ | 6 hours |

Note: Care should be taken if that plastic tray is not heat-resistant, the modules should be taken out for preheating, otherwise the tray may be damaged by high-temperature heating.

8. Appendix

I. Related Documents

Table 44: Related documents

| SN | Document name | Remark |
|------|---|--|
| [1] | SIM800_Series_AT_Command_Manual | |
| [2] | SIM800 Series Port Application Note_V1 02.doc | |
| [3] | ITU-T Draft new recommendation V.25ter: | Serial asynchronous automatic dialing and control |
| [4] | GSM 07.07: | Digital cellular telecommunications (Phase 2+); AT command set for GSM Mobile Equipment (ME) |
| [5] | GSM 07.10: | Support GSM 07.10 multiplexing protocol |
| [6] | GSM 07.05: | Digital cellular telecommunications (Phase 2+); Use of Data Terminal Equipment – Data Circuit terminating Equipment (DTE – DCE) interface for Short Message Service (SMS) and Cell Broadcast Service (CBS) |
| [7] | GSM 11.14: | Digital cellular telecommunications system (Phase 2+); Specification of the SIM Application Toolkit for the Subscriber Identity Module – Mobile Equipment (SIM – ME) interface |
| [8] | GSM 11.11: | Digital cellular telecommunications system (Phase 2+); Specification of the Subscriber Identity Module – Mobile Equipment (SIM – ME) interface |
| [9] | GSM 03.38: | Digital cellular telecommunications system (Phase 2+); Alphabets and language-specific information |
| [10] | GSM 11.10 | Digital cellular telecommunications system (Phase 2); Mobile Station (MS) conformance specification; Part 1: Conformance specification |
| [11] | AN_Serial Port | AN_Serial Port |

II. Terms and Abbreviations

Table 45: Terms and abbreviations







| Abbreviation | Description |
|--------------------------------|---|
| ADC | Analog-to-Digital Converter |
| AMR | Adaptive Multi-Rate |
| CS | Coding Scheme |
| CTS | Clear to Send |
| DTE | Data Terminal Equipment (typically computer, terminal, printer) |
| DTR | Data Terminal Ready |
| DTX | Discontinuous Transmission |
| EFR | Enhanced Full Rate |
| EGSM | Enhanced GSM |
| ESD | Electrostatic Discharge |
| ETS | European Telecommunication Standard |
| FR | Full Rate |
| GPRS | General Packet Radio Service |
| GSM | Global Standard for Mobile Communications |
| HR | Half Rate |
| MO | Mobile Originated |
| MS | Mobile Station (GSM engine), also referred to as TE |
| MT | Mobile Terminated |
| PAP | Password Authentication Protocol |
| PBCCH | Packet Broadcast Control Channel |
| PCB | Printed Circuit Board |
| PCL | Power Control Level |
| PCS | Personal Communication System, also referred to as GSM 1900 |
| PDU | Protocol Data Unit |
| PPP | Point-to-point protocol |
| RF | Radio Frequency |
| RMS | Root Mean Square (value) |
| RX | Receive Direction |
| SIM | Subscriber Identification Module |
| SMS | Short Message Service |
| TE | Terminal Equipment, also referred to as DTE |
| TX | Transmit Direction |
| SINAD | Signal to Noise and Distortion Ratio |
| UART | Universal Asynchronous Receiver & Transmitter |
| URC | Unsolicited Result Code |
| USSD | Unstructured Supplementary Service Data |
| Phonebook abbreviations | |

| | |
|----|---|
| FD | SIM fix dialing phonebook |
| LD | SIM last dialing phonebook (list of numbers most recently dialed) |
| MC | Mobile Equipment list of unanswered MT calls (missed calls) |
| ON | SIM (or ME) own numbers (MSISDNs) list |
| RC | Mobile Equipment list of received calls |
| SM | SIM phonebook |
| NC | Not connect |

SIMCOM CONFIDENTIAL FILE

III.Safety Caution

Table 46: Safety caution

| Marks | Requirements |
|---|--|
|  | When in a hospital or other health care facility, observe the restrictions about the use of mobiles. Switch the cellular terminal or mobile off, medical equipment may be sensitive to not operate normally for RF energy interference. |
|  | Switch off the cellular terminal or mobile before boarding an aircraft. Make sure it is switched off. The operation of wireless appliances in an aircraft is forbidden to prevent interference with communication systems. Forget to think much of these instructions may lead to the flight safety or offend against local legal action, or both. |
|  | Do not operate the cellular terminal or mobile in the presence of flammable gases or fumes. Switch off the cellular terminal when you are near petrol stations, fuel depots, chemical plants or where blasting operations are in progress. Operation of any electrical equipment in potentially explosive atmospheres can constitute a safety hazard. |
|  | Your cellular terminal or mobile receives and transmits radio frequency energy while switched on. RF interference can occur if it is used close to TV sets, radios, computers or other electric equipment. |
|  | Road safety comes first! Do not use a hand-held cellular terminal or mobile when driving a vehicle, unless it is securely mounted in a holder for hands free operation. Before making a call with a hand-held terminal or mobile, park the vehicle. |
|  | GSM cellular terminals or mobiles operate over radio frequency signals and cellular networks and cannot be guaranteed to connect in all conditions, for example no mobile fee or a invalid SIM card. While you are in this condition and need emergent help, please remember using emergency calls. In order to make or receive calls, the cellular terminal or mobile must be switched on and in a service area with adequate cellular signal strength. Some networks do not allow for emergency call if certain network services or phone features are in use (e.g. lock functions, fixed dialing etc.). You may have to deactivate those features before you can make an emergency call. Also, some networks require that a valid SIM card be properly inserted in the cellular terminal or mobile. |

Contact us:

Shanghai SIMCom Wireless Solutions Co.,Ltd.

Address: Building A, SIM Technology Building, No. 633, Jinzhong Road, Shanghai, P. R. China
200335

Tel: +86 21 3252 3300

Fax: +86 21 3252 3020

URL: www.simcomm2m.com

SIMCOM CONFIDENTIAL FILE