

 深圳市福瑞达显示技术有限公司 SHENZHEN FRIDA LCD CO.,LTD	Doc.No.:FRD395H40001-B-CTQ	
	REV : A	PAGE : 1/18
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2019-10-24	

PRODUCT SPECIFICATION

TFT-LCD MODULE

Model No: FRD395H40001-B-CTQ

For Customer's Acceptance	
Approved by	Comment

	Signature	Date
Prepared by	Wang jin	2019.10.24
Checked by	Lan hui	2019.10.24
Approved by	Hu shizheng	2019.10.24

深圳市福瑞达显示技术有限公司

地址: 深圳市光明新区公明田寮第二工业区田荣路 68 号

Add:The 68th, Tianrong Road, Tianliao Community, Gongming Town, Guangming new district, shenzhen.

电话(Tel): (0755) 33563741 (0755) 33563743

传真(Fax): (0755) 29351371

网址(Web): www.fridalcd.com

 深圳市福瑞达显示技术有限公司 SHENZHEN FRIDA LCD CO.,LTD	Doc.No.:FRD395H40001-B-CTQ	
	REV : A	PAGE : 2/18
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2019-10-24	

Contents

No.	ITEM
1	Document Revision History
2	General Description
3	Outline Dimension
4	Interface Specification
5	Absolute Maximum Ratings
6	Electrical Specifications
7	Timing Characteristics
8	Power Supply Configuration
9	Optical Specification
10	Inspection Specifications
11	Reliability Test Items
12	Precautions



1. Document Revision History :

DOCUMENT REVISION	DATE	DESCRIPTION	PREPARED BY
A	2019-10-24	First Release.	

 深圳市福瑞达显示技术有限公司 SHENZHEN FRIDA LCD CO.,LTD	Doc.No.:FRD395H40001-B-CTQ	
	REV : A	PAGE : 4/18
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2019-10-24	

2. General Description

No	Item	Specification	Remark
1	Screen Size	3.95 inch	
2	Display Mode	Normally Black	
3	Resolution	480 × RGB × 480	
4	Active Area	71.856*70.176	mm
5	Outline Dimension	86*86*3.82	mm
6	Viewing Direction	All	
7	Driver IC	ST7701S-G5	
8	Interface	3SPI_RGB24Bit	
9	Back Light	White Led*8	
10	Touch Panel	CTP	




SPEC TITLE

DOCUMENT CONTROL SPECIFICATION

EFFECTIVE DATE : 2019-10-24

3. Outline Dimension

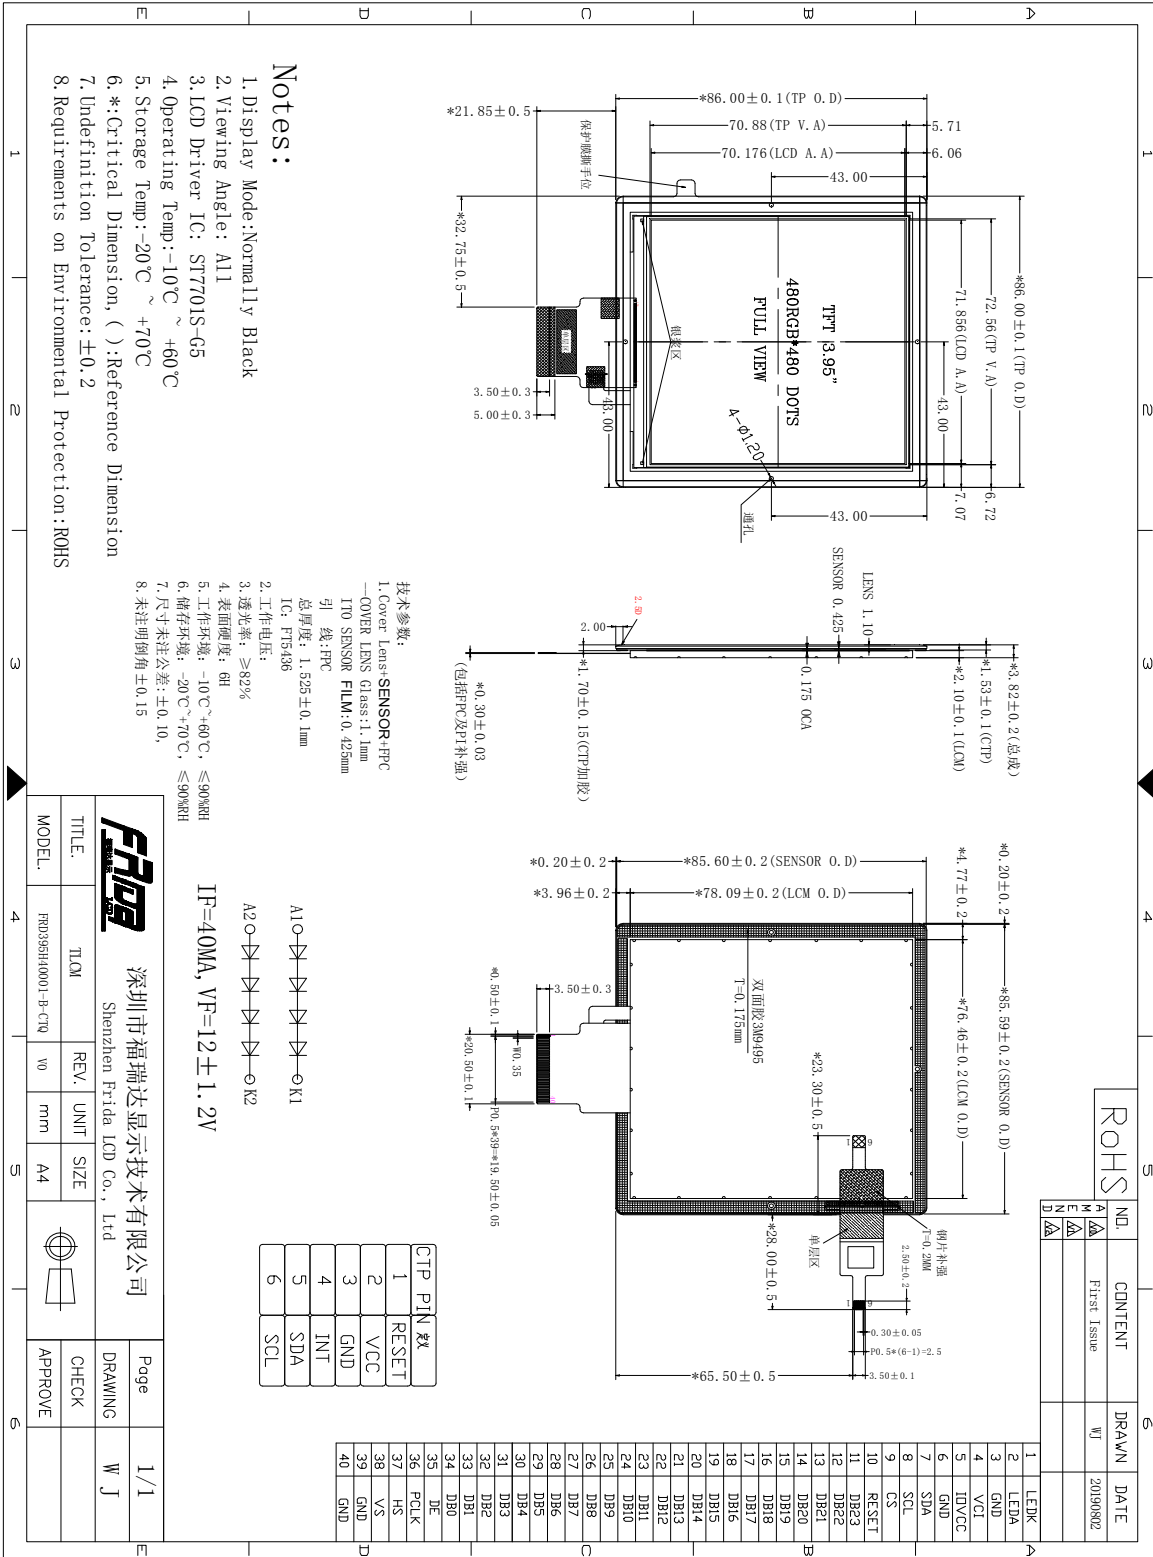

 深圳市福瑞达显示技术有限公司 SHENZHEN FRIDA LCD CO.,LTD	Doc.No.:FRD395H40001-B-CTQ	
	REV : A	PAGE : 6/18
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2019-10-24	

4. 1 LCM Interface Specification

Pin No	Symbol	Description	Note
1	LEDK	Power Supply For LED Backlight Cathode Input.	
2	LEDA	Power Supply For LED Backlight Anode Input.	
3	GND	Ground.	
4	VCI	Power Supply For LCD.	
5	IOVCC	Power Supply For I/O.	
6	GND	Ground.	
7	SDA	Serial data input/output pin.	
8	SCL	Serial clock signal pin.	
9	CS	Chip selection signal pin.	
10	RESET	Reset Signal input pin.	
11~18	DB23(R7)-DB16(R0)	Red data (R0-LSB;R7-MSB)	
19~26	DB15(G7)-DB8(G0)	Green data (G0-LSB; G7-MSB)	
27-34	DB7(B7)-DB0(B0)	Blue data (B0-LSB;B7-MSB)	
35	DE	Data enable signal for RGB interface operation.	
36	PCLK	Dot clock signal for RGB interface operation.	
37	HS	Line synchronous signal for RGB interface operation.	
38	VS	Frame synchronous signal for RGB interface operation.	
39~40	GND	Ground.	

 深圳市福瑞达显示技术有限公司 SHENZHEN FRIDA LCD CO.,LTD	Doc.No.:FRD395H40001-B-CTQ	
	REV : A	PAGE : 7/18
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2019-10-24	

4.2 CTP Interface Specification

Pin No	Symbol	Description	Note
1	RESET	CTP Reset Signal input pin.	
2	VCC	Power Supply For CTP.	
3	GND	Ground.	
4	INT	CTP interrupt request.	
5	SDA	CTP Serial data input/output pin.	
6	SCL	CTP Serial clock signal pin.	

5. Absolute Maximum Ratings

Electrical Maximum Ratings – for IC Only

Parameter	Symbol	Min.	Max.	Unit	Note
Power supply voltage (VCI)	VCI	-0.3	+3.6	V	1
Power supply voltage (IOVCC)	IOVCC	-0.3	+3.6	V	1

Note:


- 1.VCI,IOVCC, GND must be maintained.
- 2.The modules may be destroyed if they are used beyond the absolute maximum ratings.

6. Electrical Specifications

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply voltage (analog)	VCI-GND		2.5	2.8	3.6	V
Supply voltage (Logic)	IOVCC-GND		1.65	1.8	3.3	V
Supply current (Logic & LCD)	ICC		-	-	-	mA
Supply voltage of white LED backlight	VLED	Forward current =40mA Number of LED = 8	10.8	12.0	13.2	V

7. Timing Characteristics

7.1 Serial Interface Characteristics (3-line serial):

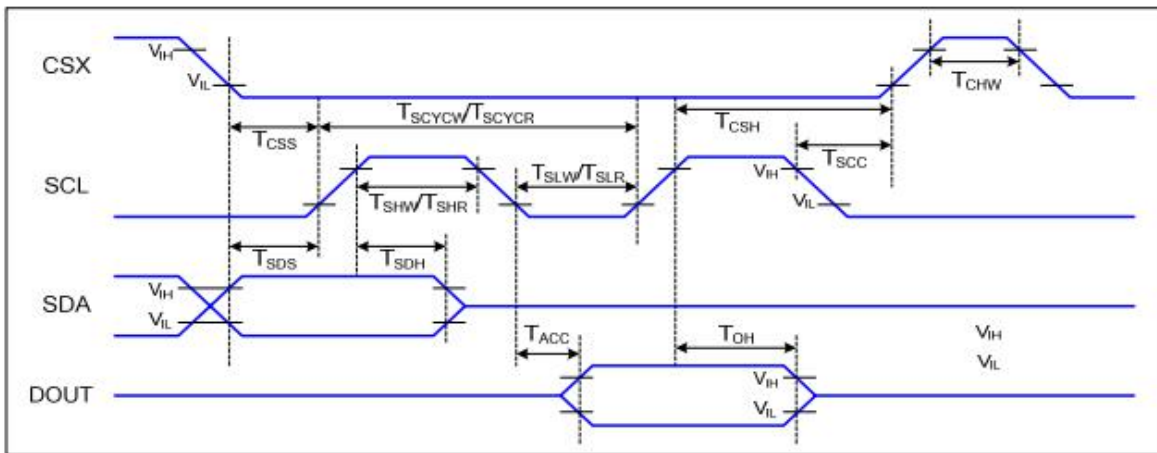


3-line serial Interface Timing Characteristics

At IOVCC=1.8, VCI=2.8, AGND=DGND=0V, Ta=25°C

Signal	Symbol	Parameter	Min	Max	Unit	Description
CSX	T_{CSS}	Chip select setup time (write)	15		ns	
	T_{CSH}	Chip select hold time (write)	15		ns	
	T_{CSS}	Chip select setup time (read)	60		ns	
	T_{SCC}	Chip select hold time (read)	60		ns	
	T_{CHW}	Chip select "H" pulse width	40		ns	
SCL	T_{SCYCW}	Serial clock cycle (Write)	66		ns	
	T_{SHW}	SCL "H" pulse width (Write)	15		ns	
	T_{SLW}	SCL "L" pulse width (Write)	15		ns	
	T_{SCYCR}	Serial clock cycle (Read)	150		ns	
	T_{SHR}	SCL "H" pulse width (Read)	60		ns	
	T_{SLR}	SCL "L" pulse width (Read)	60		ns	
SDA (DIN)	T_{SDS}	Data setup time	10		ns	
	T_{SDH}	Data hold time	10		ns	

3-line serial Interface Characteristics

7.2. RGB Interface Characteristics :

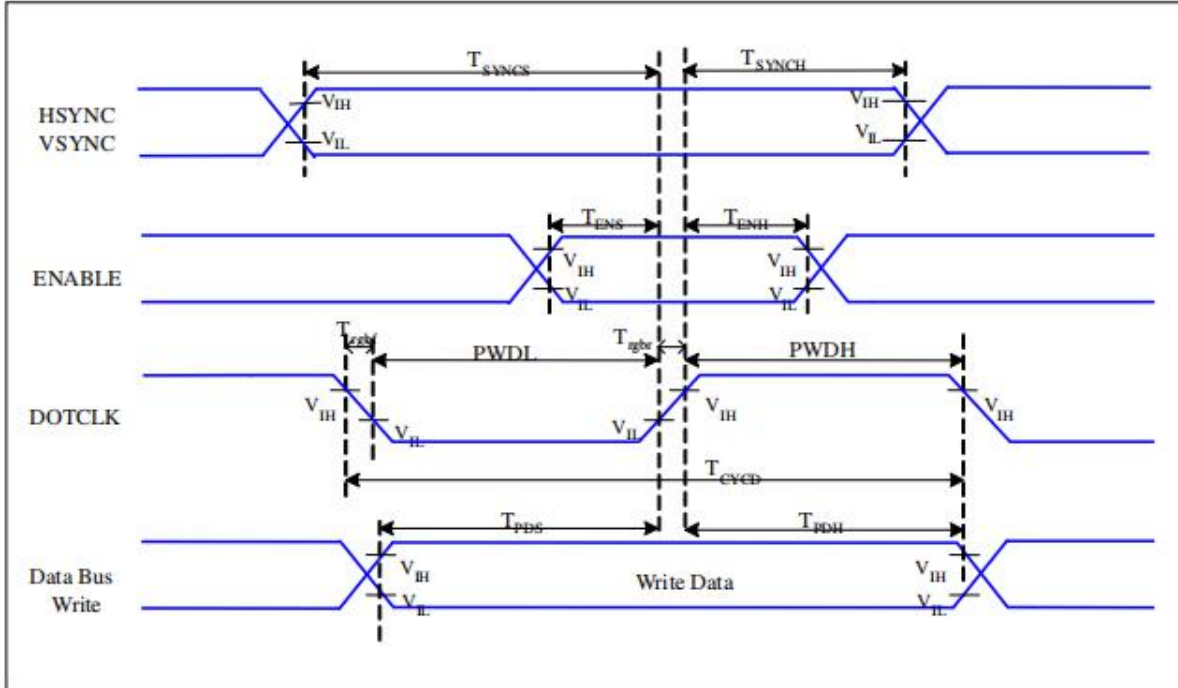

RGB Interface Timing Characteristics

IOVCC=1.8, VCI=2.8, AGND=DGND=0V, Ta=25°C

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
HSYNC, VSYNC	T_{SYNCS}	VSYNC, HSYNC Setup Time	5	-	ns	
ENABLE	T_{ENS}	Enable Setup Time	5	-	ns	
	T_{ENH}	Enable Hold Time	5	-	ns	
DOTCLK	PWDH	DOTCLK High-level Pulse Width	15	-	ns	
	PWDL	DOTCLK Low-level Pulse Width	15	-	ns	
	T_{CYCD}	DOTCLK Cycle Time	33	-	ns	
	Trghr, Trghf	DOTCLK Rise/Fall time	-	15	ns	
DB	T_{PDS}	PD Data Setup Time	5	-	ns	
	T_{PDH}	PD Data Hold Time	5	-	ns	

18/16 Bits RGB Interface Timing Characteristics

8. Power Supply Configuration

8.1. POWER ON/OFF SEQUENCE


VDDI and VDDA can be applied or powered down in any order. During the Power Off sequence, if the LCD is in the Sleep Out mode, VDDA and VDDI must be powered down with minimum 120msec. If the LCD is in the Sleep In mode, VDDA and VDDI can be powered down with minimum 0msec after the RESX is released.

CSX can be applied at any timing or can be permanently grounded. RESX has high priority over CSX.

Notes:

1. There will be no damage to the ST7701S if the power sequences are not met.
2. There will be no abnormal visible effects on the display panel during the Power On/Off Sequences.
3. There will be no abnormal visible effects on the display between the end of Power On Sequence and before receiving the Sleep Out command, and also between receiving the Sleep In command and the Power Off Sequence.
4. If the RESX line is not steadily held by the host during the Power On Sequence as defined in Sections 9.1 and 9.2, then it will be necessary to apply the Hardware Reset (RESX) after the completion of the Host Power On Sequence to ensure correct operations. Otherwise, all the functions are not guaranteed.

The power on/off sequence is illustrated below

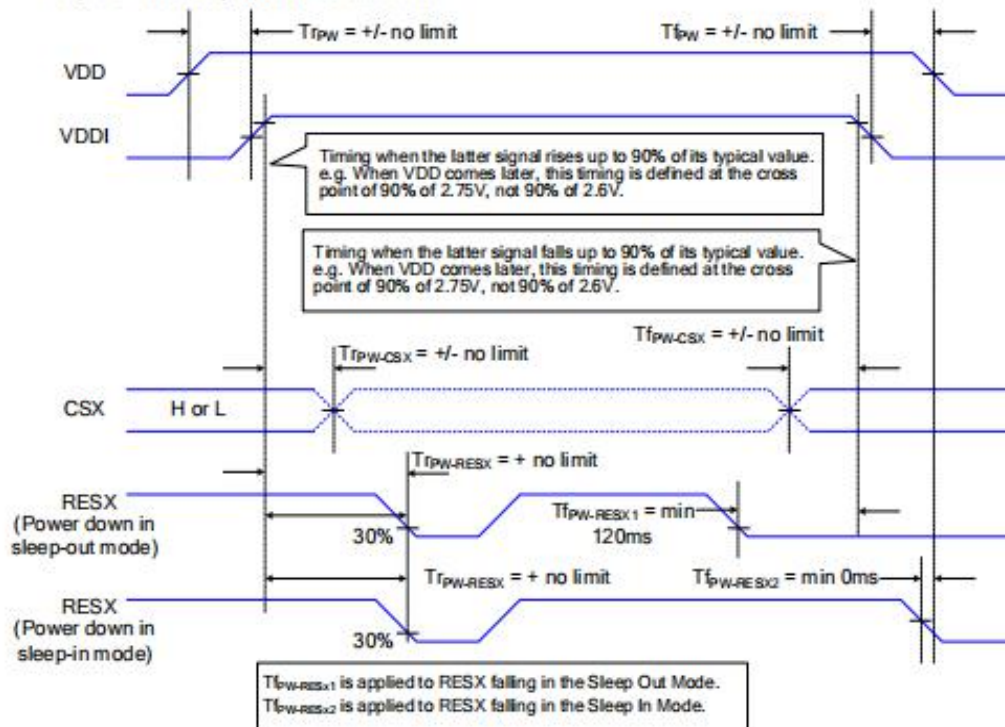

 深圳市福瑞达显示技术有限公司 SHENZHEN FRIDA LCD CO.,LTD	Doc.No.:FRD395H40001-B-CTQ	
	REV : A	PAGE : 11/18
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2019-10-24	

9.Optical Specification

Item 项目	Symbol 符号	Condition 条件	Min 最小值	Typ 典型值	Max 最大值	Unit 单位	Note 备注
Response time 响应时间	Tr+Tf	$\Theta=0^{\circ}$ $\varnothing=0^{\circ}$ $T_a=25^{\circ}\text{C}$	-	25	35	ms	1
Contrast ratio 对比度	Cr		640	800	-	-	2
Color gamut 饱和度	S(%)		55	60	-	%	-
Luminance uniformity 均匀度	$\delta^{\circ}\text{WHITE}$		80	-	-	%	3
Viewing angle range 视角范围	Θ_{x+}	$\text{CR} \geq 10$ $T_a=25^{\circ}\text{C}$	-	80	-	deg	4
	Θ_{x-}		-	80	-	deg	
	Θ_{y+}		-	80	-	deg	
	Θ_{y-}		-	80	-	deg	
LCM Luminance LCM 亮度	Lv	$\Theta=0^{\circ}$ $\varnothing=0^{\circ}$ $T_a=25^{\circ}\text{C}$	-	TBD	-	Cd/m ²	5

Note1. Response time is the time required for the display to transition from White to black(Rise Time,Tr)and from black to white(Decay Time,Tf).For additional information see FIG1...

Note2.contrast Ratio(CR) is defined mathematically by the following formula ,For more information see FIG2.

Contrast Ratio(CR)=Average Surface Luminance with all white pixels/ Average Surface Luminance with all black pixels

Note3.The uniformity in surface luminance(WHITE) is determined by measuring luminance at each test position,and then dividing the maximum luminance of all white pixels by minimum luminance of all white pixels,For more information seeFIG2.

WHITE=Minimum Surface Luminance with all white pixels(P1,P2,.....)/Maximum Surface Luminance with all white pixels(P1,P2,.....)

Note4.Viewing angle is the angel at which contrast ratio is greater than a specific value.For TET module,the specific value of contrast ratio is 10.For monochrome and color stn module,the specific value of contrast ratio is2.The angles are determined for the horizontal or x axis and the vertical or y

axis with respect to the z axis which is normal to the LCD surface.For more information see FIG3
Note5. Surface luminance is the LCD surface luminance with all white pixels,For more information
see FIG2.

LV=Average Surface Luminance with all white pixels(P1,P2,.....)

FIG1. The definition of Response time

响应时间定义

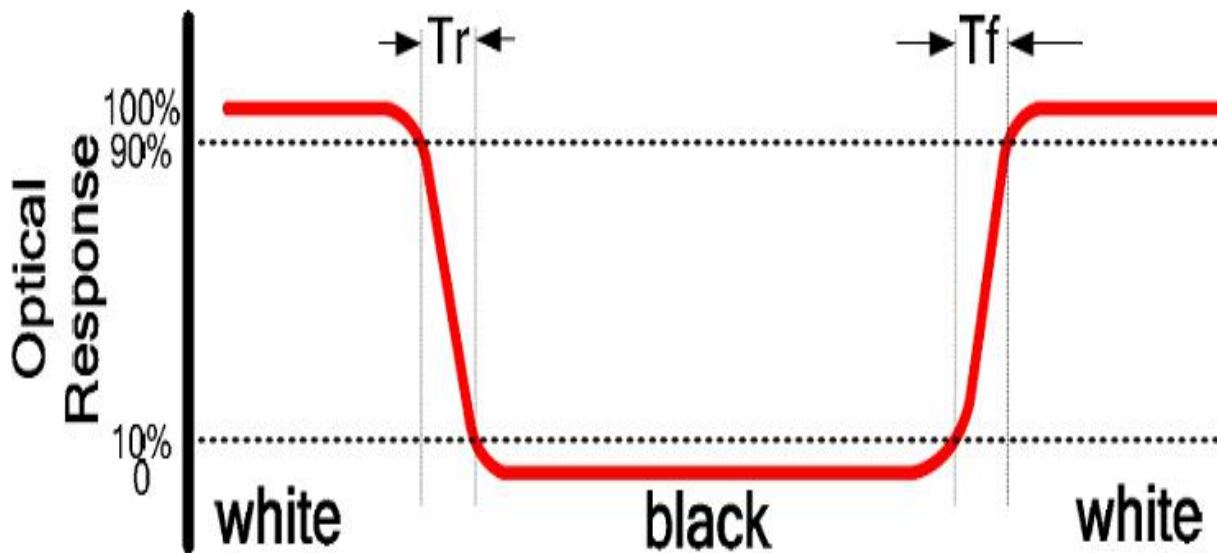


FIG2. Measuring method for Contrast ratio,surface luminance,Luminance

uniformity,CIE(X,Y)chromaticity.


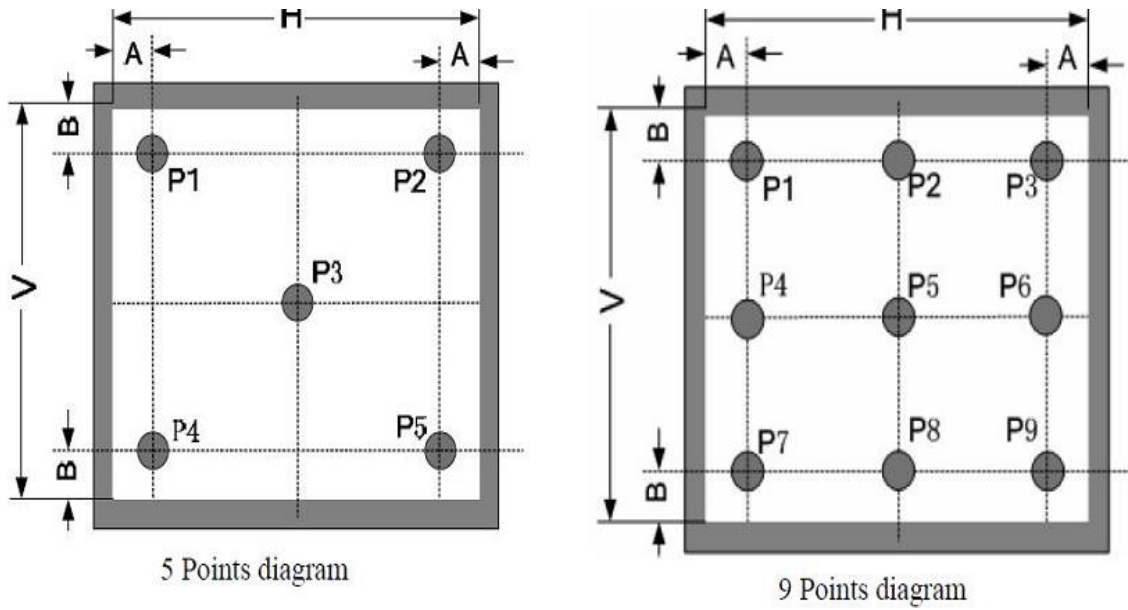


FIG3 The definition of viewing angle 视角定义

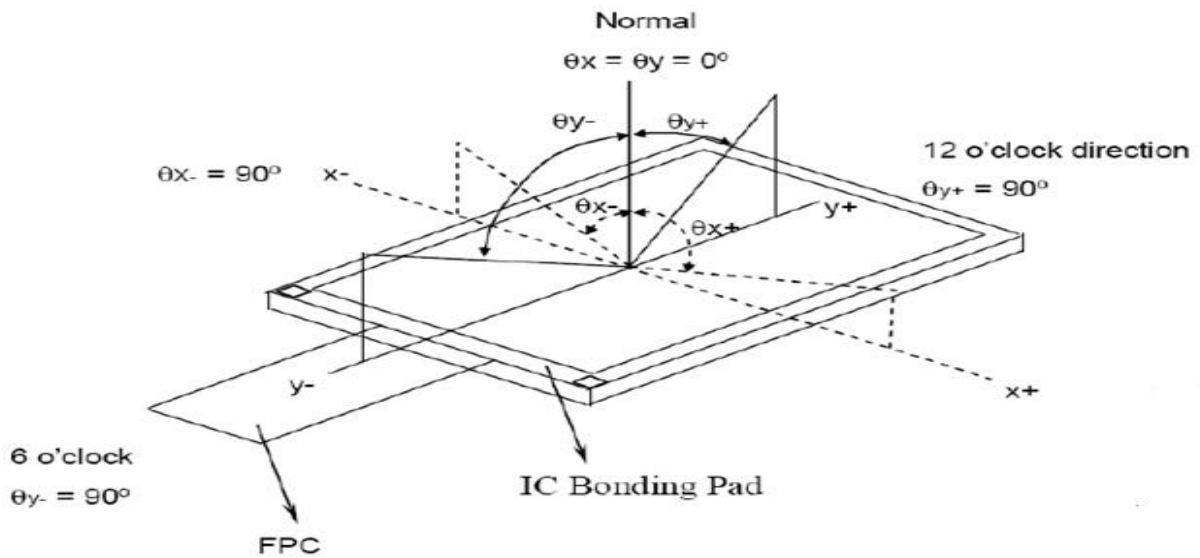

10. Inspection Specifications



10.Inspection items and standards

10.1 Visual inspection



Items	Defect acceptability standard	Defect types
Damage	Not allow	Maj
Crackle	Not allow	Maj
Glue injection bad	Not allow	Maj
Seal leakage	Not allow	Maj
Liquid crystal bubbles	Not allow	Maj
Surface scratch(mm)	$W \leq 0.02$, Ignore	Min
	$0.02 < W \leq 0.03$ $L \leq 2, N \leq 2$	
	$0.03 < W \leq 0.05$ $L \leq 1, N \leq 1$	
	$0.05 < W$,Not allow	
Black /White spot (mm)	$D \leq 0.1$, Ignore; $0.1 < D \leq 0.15, N \leq 4$	Min
	$0.15 < D \leq 0.2, N \leq 2$; $0.2 < D$, Not allow	
Sealing pollution	Not allow	Min
Liquid crystal residue	Not allow	Min
Surface pollution	No stains that cannot be cleaned or erased are allowed	Min
Size	Referring to the product specifications for each product, the overall size (including length, width, thickness) or partial size is not allowed to exceed the size of Engineering drawings	Maj

Notes: 1)The scratches on the surface of the area within 1.5mm of the edge of the glass are neglected.

2) D = diameter, L = length, W = width, N = Number;

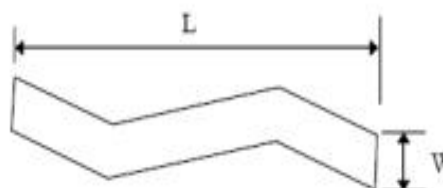

10.2 Functional testing

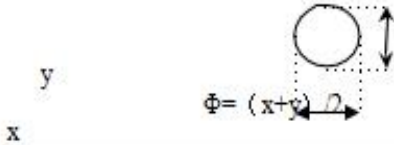Items	Judgement standard	Defect types	
Display state	No display, few pictures, few or more lines, wrong viewing angle, flicker, picture abnormality, etc. are allowed.	Maj	
	The color effect is judged by reference to the signature or by the limited template.	Min	
	MURA class or phenomena that can not be described in words, use ND5% or both sides make limit template to determine.	Min	
Display point (bright/dark) defect	Definition of Point Defect :		
			
	Size(mm)	Acceptable number	
		AA V.A	
	$\Phi \leq 0.1$	Ignore	
	$0.1 < \Phi \leq 0.15$	2 (Space ≥ 5)	
$0.15 < \Phi \leq 0.2$	1	Ignore	
$0.2 < \Phi$	Not allow		
Display black/white lines	Definition of linear defect:		
			
	Size (mm)		
	W L	Acceptable number	
	$W \leq 0.03$	Ignore	Ignore
	$0.03 < W \leq 0.05$	$L \leq 2.0$	3
$W > 0.05$	-	Not allow	Ignore
			Min

 深圳市福瑞达显示技术有限公司 SHENZHEN FRIDA LCD CO.,LTD	Doc.No.:FRD395H40001-B-CTQ	
	REV : A	PAGE : 16/18
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2019-10-24	

11. Reliability Test Items

Item	Test Condition	Criterion
High Temperature Storage	70 °C, 48 hrs	Note1,Note2
Low Temperature Storage	-20 °C, 48 hrs	
High Temp. & High Humidity Storage	40 °C, 80% RH, 48hrs	
Thermal Shock (Static)	-20°C, 30 min /70°C, 30 min, 20 cycles	
High Temperature Operation	60 °C, 48 hrs	
Low temperature Operation	-10 °C, 48 hrs	

Note1: Evaluation should be tested after storage at room temperature for two hours.

Note2:

Pass: Normal display image no line defect.

Fail: No display image, or line defects.

Partial transformation of the module parts should be ignored. 12. Precautions

Please pay attentions to the followings as using the LCD module.

Handling

- (a) Do not apply strong mechanical stress like drop, shock or any force to LCD module. It may cause improper operation, even damage.
- (b) Because the polarizer is very fragile and easy to be damaged, do not hit, press or rub the display surface with hard materials.
- (c) Do not put heavy or hard material on the display surface, and do not stack LCD modules.
- (d) If the display surface is dirty, please wipe the surface softly with cotton swab or clean cloth.
- (e) Avoid using Ketone type materials (e.g. Acetone), Toluene, Ethyl acid or Methyl chloride to clean the display surface. It might damage the touch panel surface permanently. The recommended solvents are water and Isopropyl alcohol.

 深圳市福瑞达显示技术有限公司 SHENZHEN FRIDA LCD CO.,LTD	Doc.No.:FRD395H40001-B-CTQ	
	REV : A	PAGE : 17/18
SPEC TITLE DOCUMENT CONTROL SPECIFICATION	EFFECTIVE DATE : 2019-10-24	

- (f) Wipe off water droplets or oil immediately.
- (g) Protect the LCD module from ESD. It will damage the LSI and the electronic circuit.
- (h) Do not touch the output pins directly with bare hands.
- (i) Do not disassemble the LCD module.
- (j) Do not lift the FPC of Touch Panel.

Storage


- (a) Do not leave the LCD modules in high temperature, especially in high humidity for a long time.
- (b) Do not expose the LCD modules to sunlight directly.
- (c) The liquid crystal is deteriorated by ultraviolet. Do not leave it in strong ultraviolet ray for a long time.
- (d) Avoid condensation of water. It may cause improper operation.
- (e) Please stack only up to the number stated on carton box for storage and transportation. Excessive weight will cause deformation and damage of carton box.

Operation

- (a) When mounting or dismounting the LCD modules, turn the power off.
- (b) Protect the LCD modules from electric shock.
- (c) The Driver IC control algorithms stated above should always obeyed to avoid damaging the LSI and electronic circuit.
- (d) Be careful to avoid mixing up the polarity of power supply for backlight.
- (e) Absolute maximum rating specified above has to be always kept in any case. Exceeding it may cause non-recoverable damage of electronic components or, nevertheless, burning.
- (f) When a static image is displayed for a long time, remnant image is likely to occur.
- (g) Be sure to avoid bending the FPC to an acute shape, it might break FPC.
- (h) Most of the touch screens have air vent to equalize the inside air pressure to the outside one. The air vent must be open and liquid contact must be avoided as the liquid may be absorbed if the liquid is accumulated near the air vent.
- (i) For the fragility of ITO film, it should avoid to use too tapering pen as the input material.

Touch Panel Mounting Notes

- (a) If a cushion is used between bezel/housing and film must be choose as free as enough to absorb the expansion and contraction to avoid the distortion of film.
- (b) The cushion must be placed out of the Viewing Area.
- (c) Bezel/Housing edge must be posited between Key Area and Viewing Area. The edge enters the Key Area may cause unexpected input if the gap is too narrow or foreign particles like dusts exist between Bezel/Housing and ITO film.
- (d) Mounting example:

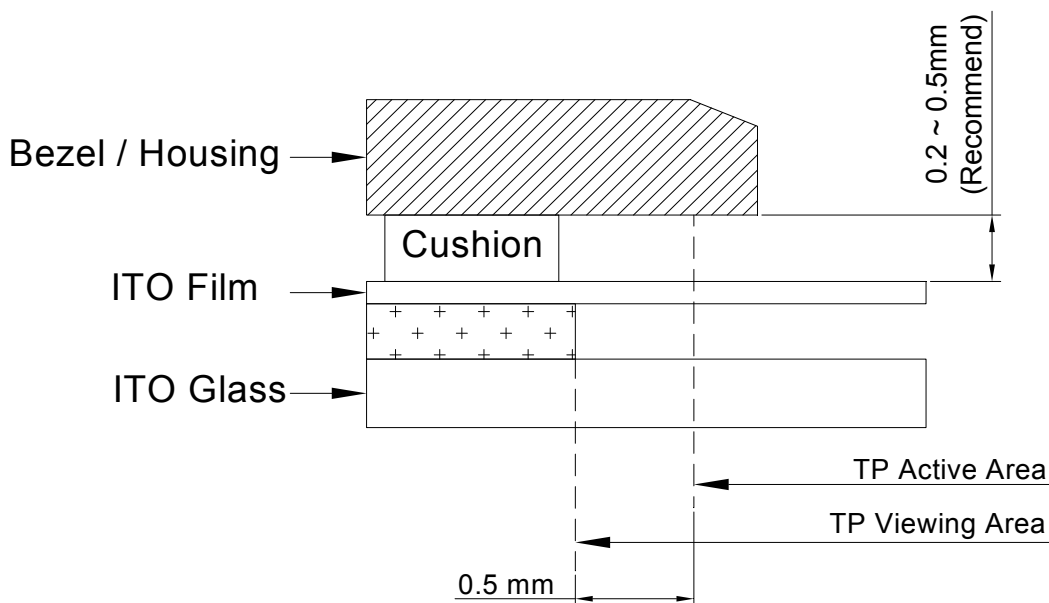

The corner part has conductivity. Do not touch any metal part after mounting.

Others

- a) If the liquid crystal leaks from the panel, it should be kept away from the eyes or mouth.
- b) For the fragility of polarizer, it is recommended to attach a transparent protective plate over the display surface.
- c) It is recommended to peel off the protection film on the polarizer slowly so that the electrostatic charge can be minimized.