



# PCAP Touch panel Controller Board

## PTPW16

### DATA SHEET

DOD-PP-3231 (2nd edition)

**This DATA SHEET is updated document from  
DOD-PP-2808(1)**

**All information is subject to change without notice.  
Please confirm the sales representative before  
starting to design your system.**

---

## INTRODUCTION

The Copyright to this document belongs to Tianma Japan, Ltd. (hereinafter called "TMJ"). No part of this document will be used, reproduced or copied without prior written consent of TMJ.

TMJ does and will not assume any liability for infringement of patents, copyrights or other intellectual property rights of any third party arising out of or in connection with application of the products described herein except for that directly attributable to mechanisms and workmanship thereof. No license, express or implied, is granted under any patent, copyright or other intellectual property right of TMJ.

Some electronic products would fail or malfunction at a certain rate. In spite of every effort to enhance reliability of products by TMJ, the possibility of failures and malfunction might not be avoided entirely. To prevent the risks of damage to death, human bodily injury or other property arising out thereof or in connection therewith, each customer is required to take sufficient measures in its safety designs and plans including, but not limited to, redundant system, fire-containment and anti-failure.

The products are classified into three grades: "**Standard**", "**Special**", and "**Specific**".

Each quality grade is designed for applications described below. Any customer who intends to use a product for application other than that of Standard is required to contact a TMJ sales representative in advance.

The **Standard**: Applications as any failure, malfunction or error of the products are free from any damage to death, human bodily injury or other property (Products Safety Issue) and not related the safety of the public (Social Issues), like general electric devices.

Examples: Office equipment, audio and visual equipment, communication equipment, test and measurement equipment, personal electronic equipment, home electronic appliances, car navigation system (with no vehicle control functions), seat entertainment monitor for vehicles and airplanes, fish finder (except marine radar integrated type), PDA, etc.

The **Special**: Applications as any failure, malfunction or error of the products might directly cause any damage to death, human bodily injury or other property (Products Safety Issue) and the safety of the public (Social Issues) and required high level reliability by conventional wisdom.

Examples: Vehicle/train/ship control system, traffic signals system, traffic information control system, air traffic control system, surgery/operation equipment monitor, disaster/crime prevention system, etc.

The **Specific**: Applications as any failure, malfunction or error of the products might severe cause any damage to death, human bodily injury or other property (Products Safety Issue) and the safety of the public (Social Issues) and developed, designed and manufactured in accordance with the standards or quality assurance program designated by the customer who requires extremely high level reliability and quality.

Examples: Aerospace system (except seat entertainment monitor), nuclear control system, life support system, etc.

The quality grade of this product is the "**Standard**" unless otherwise specified in this document.

---

**CONTENTS**

<b>INTRODUCTION .....</b>	<b>2</b>
<b>1. OUTLINE.....</b>	<b>4</b>
<b>2. SPECIFICATIONS.....</b>	<b>4</b>
2.1 GENERAL SPECIFICATIONS.....	4
2.2 ABSOLUTE MAXIMUM RATINGS .....	4
2.3 ELECTRICAL CHARACTERISTICS .....	5
2.4 TOUCH PANEL SPECIFICATIONS .....	5
2.5 CONNECTIONS .....	6
2.6 TOUCH PANEL POSITIONS .....	7
<b>3. RELIABILITY TEST.....</b>	<b>7</b>
<b>4. PRECAUTIONS .....</b>	<b>8</b>
4.1 MEANING OF CAUTION SIGNS .....	8
4.2 CAUTIONS .....	8
4.3 ATTENTIONS .....	8
4.3.1 Handling of the product .....	8
4.3.2 Environment.....	8
4.3.3 Others.....	8
<b>5. OUTLINE DRAWINGS .....</b>	<b>10</b>

1. OUTLINE

PTPW16 is PCAP Touch panel Controller Board for LCD module with PCAP touch panel. In addition, this PTPW16 is compliant with the European RoHS directive (2011/65/EU) and Delegated Directive (2015/863/EU, Amending Annex II of 2011/65/EU).



2. SPECIFICATIONS

2.1 GENERAL SPECIFICATIONS

Item	Specification	Unit
Size	See "5. OUTLINE DRAWINGS".	mm
Weight	7 (typ.)	g
Interface	USB (2.0, Full speed)	-
Supported OS	Windows 7/8/8.1/10 (HID Digitizer device)	-

2.2 ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating	Unit	Remarks
Power supply voltage	VBUS	-0.3 to +6.0	V	Ta= 25°C
Input voltage	DP, DM	-0.3 to +3.5		
Storage temperature	Tst	-30 to +80	°C	-
Operating temperature	Top	-30 to +80		-
Relative humidity Note1	RH	≤ 95	%	Ta ≤ 40°C
		≤ 85		40°C < Ta ≤ 50°C
		≤ 55		50°C < Ta ≤ 60°C
		≤ 36		60°C < Ta ≤ 70°C
		≤ 24		70°C < Ta ≤ 80°C
Absolute humidity Note1	AH	≤ 70 Note2	g/m <sup>3</sup>	Ta = 80°C

Note1: No condensation

Note2: Water amount at Ta= 80°C and RH= 24%

2.3 ELECTRICAL CHARACTERISTICS

(Ta = 25°C, Note1)

Parameter	Symbol	min.	typ.	max.	Unit	Remarks	
Power supply voltage	VBUS	4.5	5.0	5.5	V	Note2	
Power supply current	Active	IBUS	-	110	130	mA	at 15-inch touch panel, Scan speed 100Hz Note3
	Idle	IBUSi	-	40	50		
Input leakage current	Iil	-	-	1	μA	-	
Permissible ripple voltage	VRP	-	-	100	mVp-p	For VBUS	

Note1: When designing of the power supply, take the measures for the prevention of surge voltage.

Note2: VBUS must be supplied after connecting the controller board to the LCD module. Otherwise the board may be broken due to electrical stress to the board.

Note3: The number of touch is 10.

2.4 TOUCH PANEL SPECIFICATIONS

(Ta= 25°C)


Parameter	Symbol	min.	typ.	max.	Unit	Remarks	
Accuracy	Center	Acrc	-	-	1.5	mm	Note1
	Boarder	Acrb	-	-	2.5		
Number of touch	NUM	1	-	16	Point	-	
Scan speed	Active	Sspd A	-	100	-	Hz	-
	Idle	Sspd I	-	30			
Resolution	Horizontal	-	-	-	4,096	-	-
	Vertical	-	-	-	4,096		

Note1: Definition of accuracy

Accuracy shows a difference between an ideal position and an actual position.

Acrc: Accuracy at center area

Acrb: Accuracy at border area

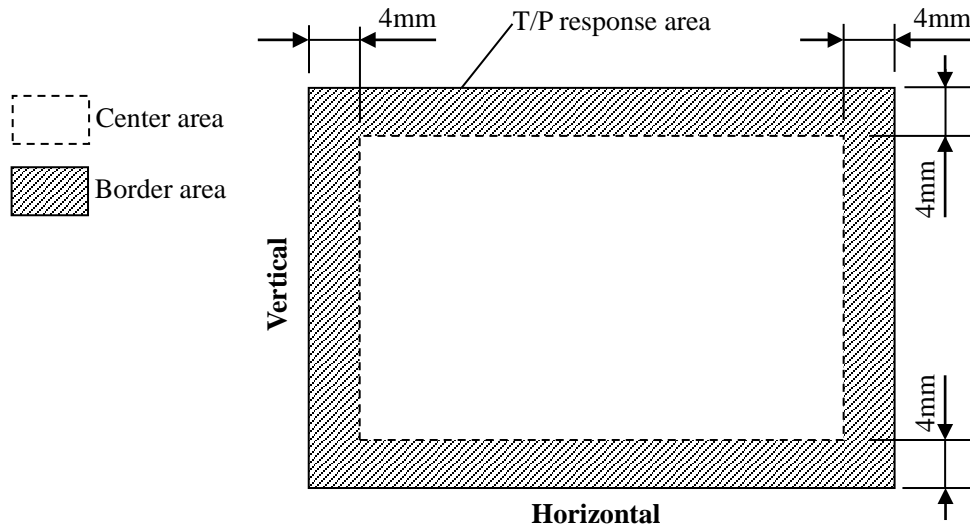

Input method is φ8mm conductive stylus.

2.5 CONNECTIONS

CN1 socket (Controller board side): 53261-0871 (Molex)  
 Adaptable plug: 51021-0800 (Molex)

Pin No.	Symbol	Function	Remarks
1	VBUS	Power supply	Note1
2	DM	USB data -	-
3	DP	USB data +	-
4	GND	Ground	Note1
5	N. C.	-	Keep this pin open.
6	N. C.	-	Keep this pin open.
7	N. C.	-	Keep this pin open.
8	N. C.	-	Keep this pin open.


Note1: All GND and VBUS terminals must be connected to appropriate terminals.

CN2 socket (Controller board side): FH28-60S-0.5SH(05) (Hirose Electric Co., Ltd.(HRS))

Please connect to the PCAP FPC (60pin) of the LCD module side.  
 (Refer to below diagram.)


CN3 socket (Controller board side): FH28-40S-0.5SH(05) (Hirose Electric Co., Ltd.(HRS))

Please connect to the PCAP FPC (40pin) of the LCD module side.  
 (Refer to below diagram.)

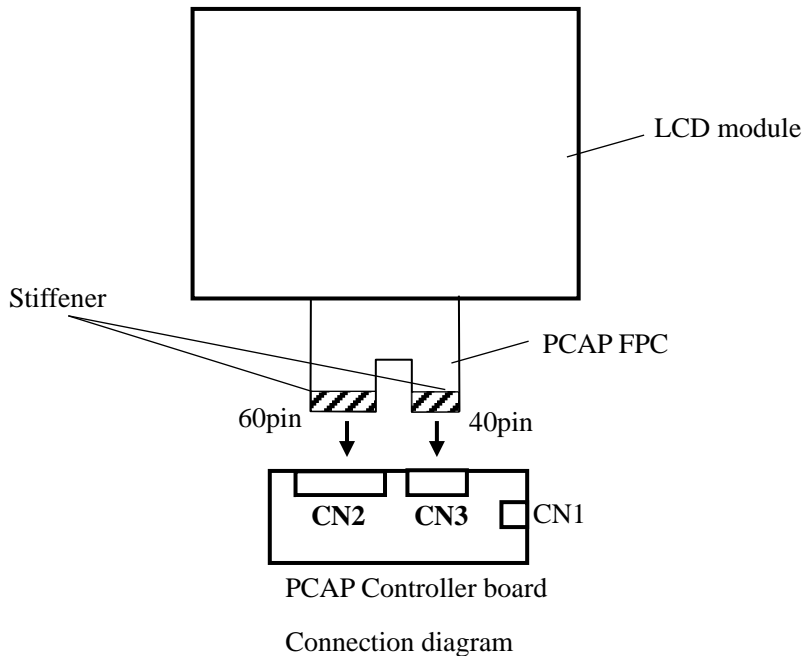

## 2.6 TOUCH PANEL POSITIONS

The following figure is the coordinates of the T/P from the front view.

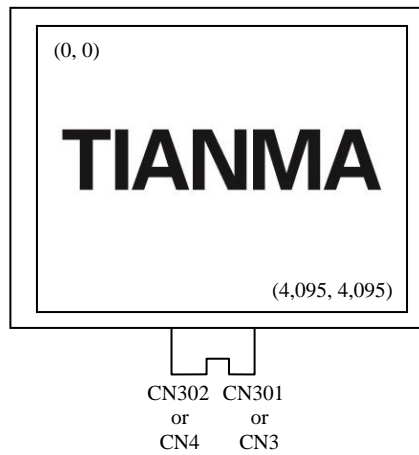


## 3. RELIABILITY TEST


This test is in accordance with the Reliability Test of the adaptable LCD module. Refer to Reliability Test of the adaptable LCD module.

## 4. PRECAUTIONS


### 4.1 MEANING OF CAUTION SIGNS

The following caution signs have very important meaning. **Be sure to read "4.2 CAUTIONS" and "4.3 ATTENTIONS"!**

	This sign has the meaning that a customer will be injured or the product will sustain damage if the customer practices wrong operations.
-----------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------

	This sign has the meaning that a customer will be injured if the customer practices wrong operations.
-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------

### 4.2 CAUTIONS

	* Do not apply mechanical shock. It may damage products.
-----------------------------------------------------------------------------------	----------------------------------------------------------

### 4.3 ATTENTIONS

#### 4.3.1 Handling of the product

- ① Do not touch or apply stress to exposed electronic parts. Doing so may cause damage or malfunctioning of products. Only hold the edge of the circuit board when unpacking.
- ② When handling the product, take measures of electrostatic discharge with such as earth band, ionic shower and so on, because the product may be damaged by electrostatic.
- ③ Do not plug or unplug the interface connectors while the product is operating.
- ④ Do not hook or pull cables such as lamp cable, and so on, in order to avoid any damage.

#### 4.3.2 Environment

- ① Do not operate or store in high temperature, high humidity, dewdrop atmosphere or corrosive gases. Keep the product in packing box with antistatic pouch in room temperature to avoid dusts and sunlight, when storing the product.
- ② In order to prevent dew condensation occurred by temperature difference, the product packing box must be opened after enough time being left under the environment of an unpacking room. Evaluate the storage time sufficiently because dew condensation is affected by the environmental temperature and humidity. (Recommended leaving time: 6 hours or more with the original packing state after a customer receives the package)
- ③ Do not operate in high magnetic field. If not, circuit boards may be broken.
- ④ This product is not designed as radiation hardened.


#### 4.3.3 Others

- ① All GND and VBUS terminals should be used without any non-connected lines.
- ② Do not disassemble a product.
- ③ Pack the product with the original shipping package, in order to avoid any damages during transportation, when returning the product to TMJ.




- ④ Insert spacers between the PCAP Controller board and the chassis to secure spatial distance.

Mounting method example 1

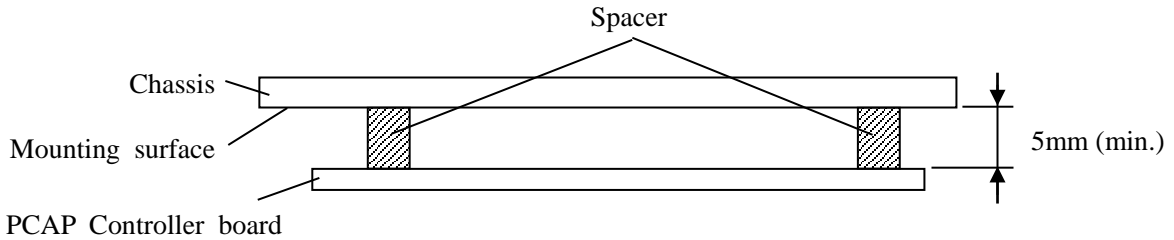

\*Components are mounted on the upper side in this drawing.

Mounting method example 2

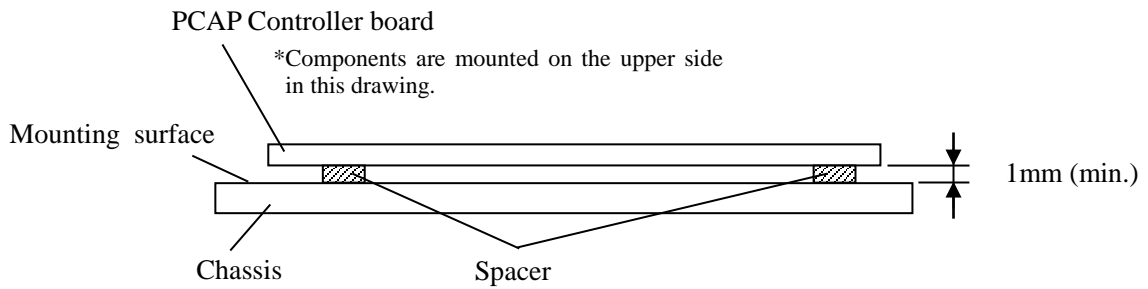

- ⑤ T/P operational performance (the number of touch, touch sensitivity and so on) may vary depending on usage environments (screen wet condition, thickness of using glove and so on ). It is needed to adjust parameters of a T/P controller depending on usage environments.
- ⑥ The information of China RoHS ( II ) six hazardous substances or elements in this product is as follows.




China RoHS ( II ) six hazardous substances or elements					
Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr VI)	Polybrominated Biphenyls (PBB)	Polybrominated Biphenyl Ethers (PBDE)
×	○	○	○	○	○

Note1: ○: This indicates that the poisonous or harmful material in all the homogeneous materials for this part is equal or below the limitation level of GB/T26572-2011 standard regulation.

×: This indicates that the poisonous or harmful material in all the homogeneous materials for this part is above the limitation level of GB/T26572-2011 standard regulation.

**5. OUTLINE DRAWINGS**

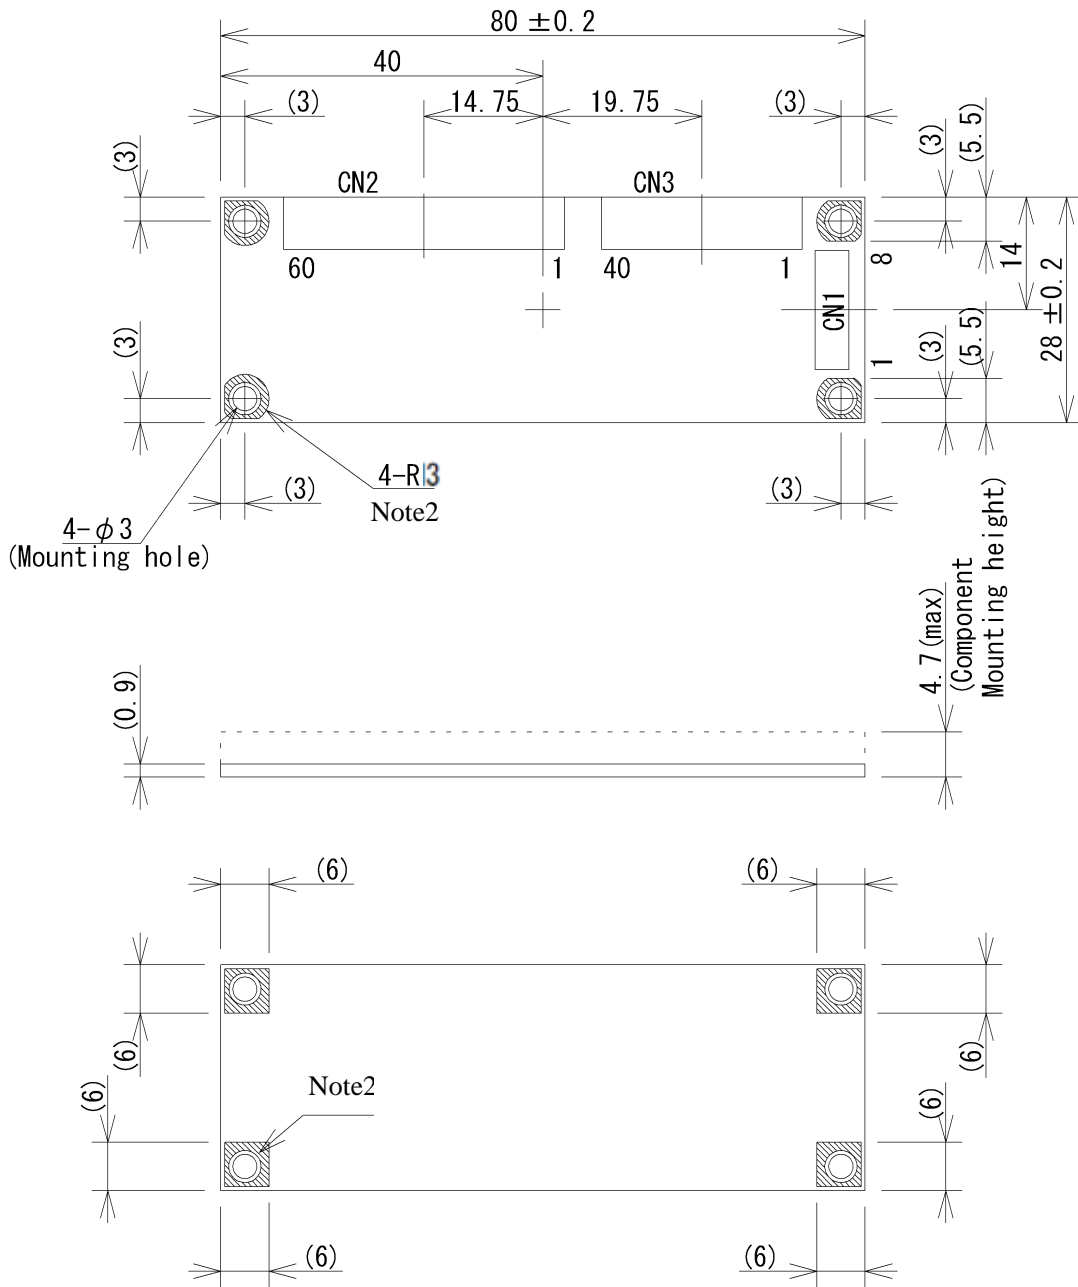

(Unit: mm)

Note1: The values in parentheses are for reference.

Note2: Four mounting holes are connected to GND in the product.