









ProLight AL6A-RA1DF 0.5W Power LED **Technical Datasheet**

Version: 1.1

ProLight Opto AL6A Series

Features

- · Moisture Sensitivity: JEDEC Level 2
- · RoHS compliant
- · Lead free reflow soldering

Main Applications

- · Backlighting
- · Signaling
- · Exterior Automotive Lighting
- · Automotive Interior Lighting

Automotive


Introduction

·AL6A offer red color solution to meet the needs of backlighting, signaling, exterior automotive lighting, and automotive interior lighting. Alone with high-quality materials, AL6A bring not only high performance but also good reliability to fulfil customer's requirements.

2022/04 DS-1584



Emitter Mechanical Dimensions

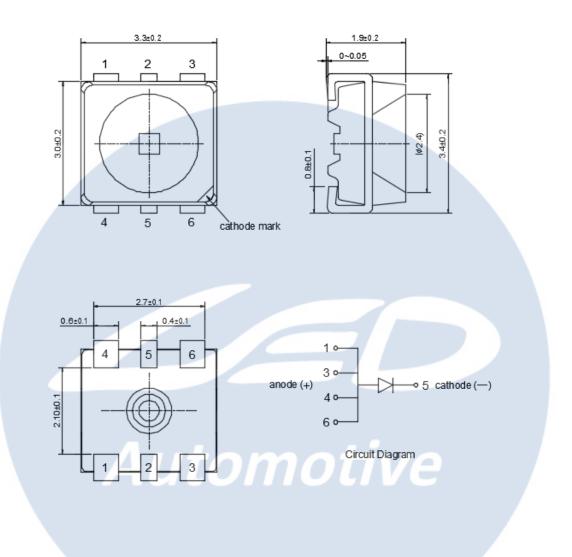

Notes:

- 1. The cathode side of the device is denoted by the chamfer on the part body.
- 2. Drawing not to scale.
- 3. All dimensions are in millimeters.
- 4. Unless otherwise indicated, tolerances are \pm 0.10mm.
- 5. Please do not solder the emitter by manual hand soldering, otherwise it will damage the emitter.

*The appearance and specifications of the product may be modified for improvement without notice.

2022/04 DS-1584



Flux Characteristics at 140mA, $T_1 = 25^{\circ}C$

Radiation	Color	Part Number	Luminous In	tensity (cd)
Pattern	Color	Emitter	Minimum	Typical
Lambertian	Red	AL6A-RA1DF	5.6	7.2

- ProLight maintains a tolerance of ± 7% on flux and power measurements.
- Please do not drive at rated current more than 1 second without proper heat sink.

Electrical Characteristics at 140mA, T₁ = 25°C

Color	Fo	Forward Voltage V _F (V)		Thermal Resistance	
	Min.	Typ. Max.		Junction to Slug (°C/ W)	
Red	1.9	2.2	2.5	31	

 $[\]bullet$ ProLight maintains a tolerance of \pm 0.1V for Voltage measurements.

Optical Characteristics at 140mA, T_J = 25°C

					Total	
					included	Viewing
					Angle	Angle
Radiation	Oalan .	Domi	nant Wavelen	gth λ _D	(degrees)	(degrees)
Pattern	Color	Min.	Тур.	Max.	$\theta_{0.90V}$	2 θ _{1/2}
Lambertian	Red	616 nm	621 nm	629 nm	160	120

[•] ProLight maintains a tolerance of ± 1nm for dominant wavelength measurements.

2022/04 DS-1584



Absolute Maximum Ratings

Parameter	Red
Max DC Forward Current (mA)	200
Peak Pulsed Forward Current (mA)	350 (less than 1/10 duty cycle@1KHz)
LED Junction Temperature	125°C
Operating Board Temperature at Maximum DC Forward Current	-40°C - 110°C
Storage Temperature	-40°C - 110°C
Soldering Temperature	JEDEC 020c 260°C
Allowable Reflow Cycles	3
Reverse Voltage	10
ESD withstand voltage(kV) (acc. to IEC 61000-4-2-air discharge)	2

Photometric Luminous Intensity Bin Structure at 140mA

Color	Bin Code	Minimum Luminous Intensity (cd)	Maximum Luminous Intensity (cd)	Typical Luminous Flux Φ _V (lm)	Available Color Bins
Red	G H J K	5.6 7.1 9.0 11.2	7.1 9.0 11.2 14.0	19.1 24.2 30.3 37.8	All [1] [1]

- ProLight maintains a tolerance of ± 7% on flux and power measurements.
- The flux bin of the product may be modified for improvement without notice.
- [1] The rest of color bins are not 100% ready for order currently. Please ask for quote and order Possibility.

Tel: +886-3-461-8618 Fax: +886-3-461-8677

No. 89, Xiyuan Rd., Zhongli Dist., Taoyuan City 32057, Taiwan (R.O.C.)



Dominant Wavelength Bin Structure at 140mA

Color	Bin Code	Minimum Dominant Wavelength (nm)	Maximum Dominant Wavelength (nm)
	3	616	620
Red	4	620	624
	5	624	629

[•] ProLight maintains a tolerance of ± 1nm for dominant wavelength measurements.

Note: Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all colors.

Forward Voltage Bin Structure at 140mA

Color	Bin Code	Minimum Voltage (V)	Maximum Voltage (V)
Red	A	1.90	2.05
	B	2.05	2.20
	D	2.20	2.35
	E	2.35	2.50

• ProLight maintains a tolerance of ± 0.1V for Voltage measurements.

Note: Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all colors.


Automotive

2022/04 DS-1584




Color Spectrum, $T_1 = 25^{\circ}C$

1. Red

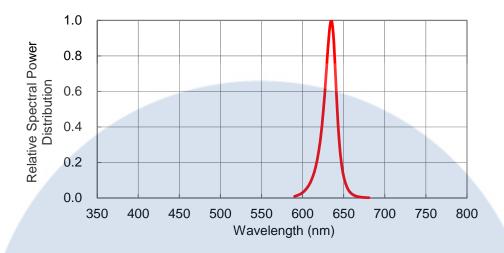

Light Output Characteristics

Relative Light Output vs. Junction Temperature at 200mA

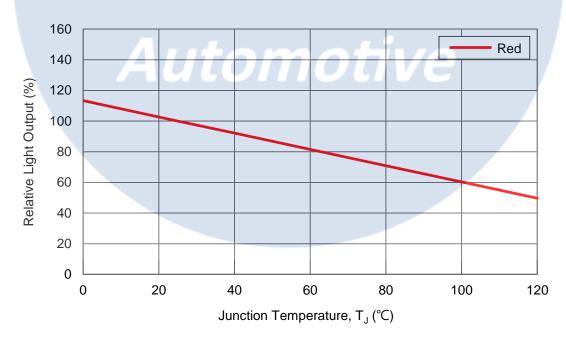



2022/04 DS-1584

No. 89, Xiyuan Rd., Zhongli Dist., Taoyuan City 32057, Taiwan (R.O.C.)




Forward Current Characteristics, T_j = 25°C





Ambient Temperature vs. Maximum Forward Current


1. Red $(T_{JMAX} = 125^{\circ}C)$

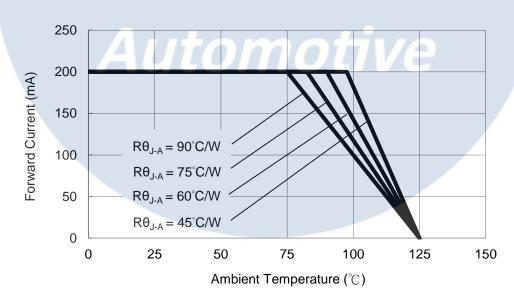

2022/04 | DS-1584



Typical Representative Spatial Radiation Pattern

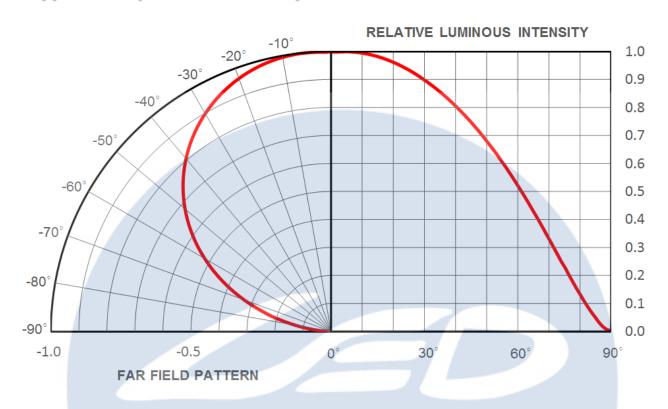

Automotive

2022/04 | DS-1584



Moisture Sensitivity Level - JEDEC Level 2

			Soak Requirements			
Level	Floo	r Life	Stan	dard	Accelerated	Environment
	Time	Conditions	Time (hours)	Conditions	Time (hours)	Conditions
2	1 year	≤30°C / 60% RH	168 +5/-0	85°C / 60% RH	NA	NA

- The standard soak time includes a default value of 24 hours for semiconductor manufature's exposure time (MET) between bake and bag and includes the maximum time allowed out of the bag at the distributor's facility.
- Table below presents the moisture sensitivity level definitions per IPC/JEDEC's J-STD-020C.

				Soak Pon	uirements	
Level	_evel Floor Life		Stan		Accelerated Environment	
	Time	Conditions	Time (hours)	Conditions	Time (hours)	Conditions
1	Unlimited	≤30°C / 85% RH	168 +5/-0	85°C / 85% RH	NA	NA
2	1 year	≤30°C / 60% RH	168 +5/-0	85°C / 60% RH	NA	NA
2a	4 weeks	≤30°C / 60% RH	696 +5/-0	30°C / 60% RH	120 +1/-0	60°C / 60% RH
3	168 hours	≤30°C / 60% RH	192 +5/-0	30°C / 60% RH	40 +1/-0	60°C / 60% RH
4	72 hours	≤30°C / 60% RH	96 +2/-0	30°C / 60% RH	20 +0.5/-0	60°C / 60% RH
5	48 hours	≤30°C / 60% RH	72 +2/-0	30°C / 60% RH	15 +0.5/-0	60°C / 60% RH
5 a	24 hours	≤30°C / 60% RH	48 +2/-0	30°C / 60% RH	10 +0.5/-0	60°C / 60% RH
6	Time on Label (TOL)	≤30°C / 60% RH	Time on Label (TOL)	30°C / 60% RH	NA	NA

Tel: +886-3-461-8618 Fax: +886-3-461-8677

No. 89, Xiyuan Rd., Zhongli Dist., Taoyuan City 32057, Taiwan (R.O.C.)



Reliability testing in accordance with AEC-Q101 (Rev D1)

The development of this product included extensive operational life-time testing and environmental testing. Table 1 summarizes the tests applied and cumulative test results obtained from testing performed in accordance with AEC-Q101(Rev D1).

Table 1. Operating life, mechanical and environmental tests performed on it's package in accordance with AEC-Q101 (Rev D1).

Abrb Stress	Conditions	Duration	Failure Criteria	Rejects
TEST Pre- and Post-Stress Electrical Test	T _J = 25°C	N/A	See notes [2]	0
PC Pre-conditioning	JESD22-A113 Soak Tamb = 85°C, RH = 85% Reflow soldering	168 hours 3 cycles	See notes [2]	0
EV External Visual	JESD22 B-101	N/A	See notes [2]	0
HTFB High Temperature Forward Bias	JESD22-A108 Tamb =85°C, IF = max. DC [1]	1000 hours	See notes [2]	0
TC Temperature Cycling	JESD22-A104 -30°C to 80°C	1000 cycles	See notes [2]	0
HTHHB High temp. & High Humidity Bias	JESD22-A101 Tamb = 85°C, RH = 85%, IF = max. DC [1]	1000 hours	See notes [2]	0
PTC Power and Temperature cycle	-30°C to 85°C, 10 minutes dwell, 20 minutes transfer (1 hour cycle), 2 minutes ON/2 minutes OFF, IF = max. DC [1]	1000 hours	See notes [2]	0
ESD	AEC Q101-001	8000V	See notes [2]	0
VVF Vibration Variable Frequency	10-2000-10 Hz, log or linear sweep rate, 20 G about 1 min., 1.5 mm, 3X/axis	Hille	See notes [3]	0
MS Mechanical Shock	1500 G, 0.5 msec. pulse, 5 shocks each 6 axis		See notes [3]	0
RSH Resistance to Solder Heat	JESD22-A111 / JESD22-B106 260 °C ± 5 °C	10 s	See notes [3]	0
SD Solderability	J-STD-002 245 °C ± 5 °C	3 s	See notes [3]	0

Notes

1. Depending on the maximum derating curve.

2. Criteria for judging failure

Itam	Toot Condition	Criteria for Judgement		
Item	Test Condition	Min.	Max.	
Forward Voltage (V _F)	I _F = max DC		Initial Level x 1.1	
Luminous Flux or	I _F = max DC	Initial Level x 0.8		
Radiometric Power (Φ _V)	IF = Max Bo	Initial Edvor X 0.0		
Reverse Current (I _R)	$V_R = 5V$		50 μA	
* The test is a sufference of aftern	de a LED la caraladada.		-4	

^{*} The test is performed after the LED is cooled down to the room temperature.

3. A failure is an LED that is open or shorted.

2022/04 DS-1584

ProLight Opto Technology Corp.


No. 89, Xiyuan Rd., Zhongli Dist., Taoyuan City 32057, Taiwan (R.O.C.)

10



Recommended Solder Pad Design

Solder Pad

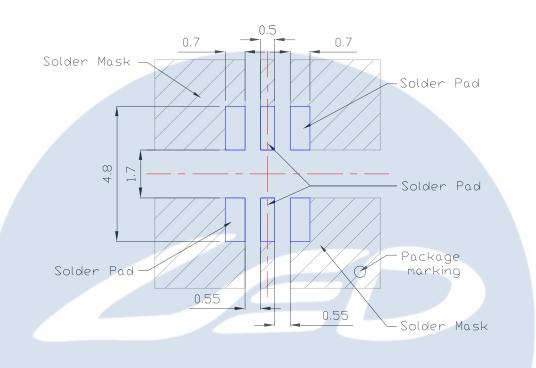


Automotive

- All dimensions are in millimeters.
- Electrical isolation is required between Slug and Solder Pad.

2022/04 | DS-1584



Emitter Reel Packaging

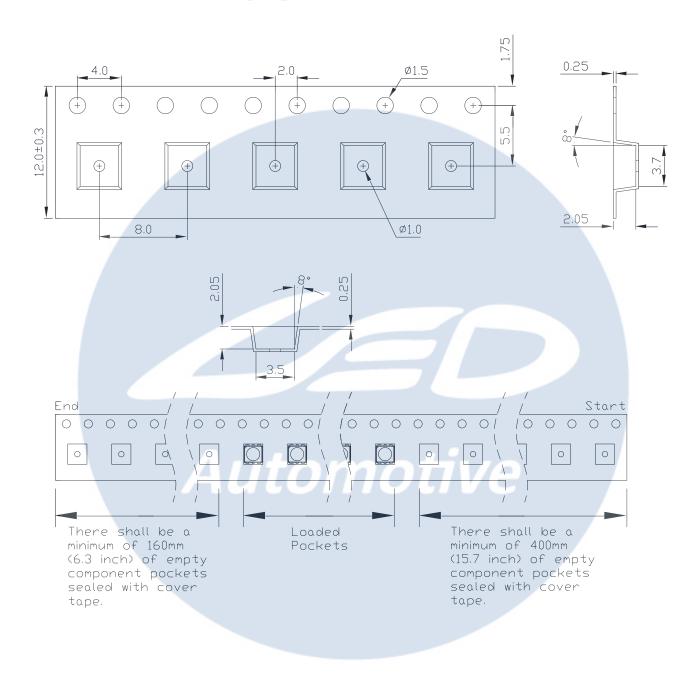

Notes:

- 1. Drawing not to scale.
- 2. All dimensions are in millimeters.
- 3. Unless otherwise indicated, tolerances are $\pm\,0.10\mbox{mm}.$


2022/04 DS-1584

No. 89, Xiyuan Rd., Zhongli Dist., Taoyuan City 32057, Taiwan (R.O.C.)

12



Emitter Reel Packaging

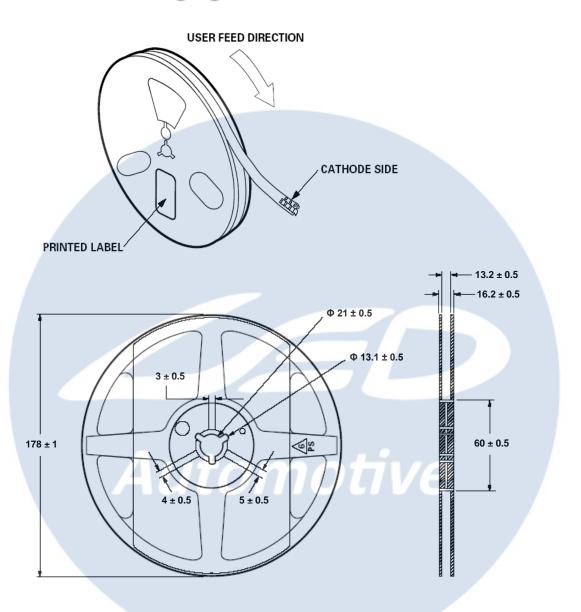

Notes:

- 1. Empty component pockets sealed with top cover tape.
- 2. 1000 pieces per reel.
- 3. Drawing not to scale.
- 4. All dimensions are in millimeters.

2022/04 DS-1584



Precaution for Use

Storage


Please do not open the moisture barrier bag (MBB) more than one week. This may cause the leads of LED discoloration. We recommend storing ProLight's LEDs in a dry box after opening the MBB. The recommended storage conditions are temperature 5 to 30 °C and humidity less than 40% RH. It is also recommended to return the LEDs to the MBB and to reseal the MBB.


- We recommend using the M705-S101-S4 solder paste from SMIC (Senju Metal Industry Co., Ltd.) for lead-free soldering.
- Do not use solder pastes with post reflow flux residue>47%. (58Bi-42Sn eutectic alloy, etc) This kind of solder pastes may cause a reliability problem to LED.
- Any mechanical force or any excess vibration shall not be accepted to apply during cooling process to normal temperature after soldering.
- Please avoid rapid cooling after soldering.
- Components should not be mounted on warped direction of PCB.
- Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, a heat plate should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.
- This device should not be used in any type of fluid such as water, oil, organic solvent and etc. When cleaning is required, isopropyl alcohol should be used.
- When the LEDs are illuminating, operating current should be decide after considering the package maximum temperature.

Handling of Silicone LEDs

Notes for handling of silicone lens LEDs

- The LEDs should only be picked up by making contact with the sides of the LED body.
- Avoid touching the silicone especially by sharp tools such as Tweezers.
- Avoid leaving fingerprints on the silicone.
- Please store the LEDs away from dusty areas or seal the product against dust.
- When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the silicone must be prevented.
- Please do not mold over the silicone with another resin. (epoxy, urethane, etc)





2022/04 DS-1584

Tel: +886-3-461-8618 Fax: +886-3-461-8677

No. 89, Xiyuan Rd., Zhongli Dist., Taoyuan City 32057, Taiwan (R.O.C.)