

SPECIFICATION FOR APPROVAL


() Preliminary Specification(●) Final Specification

Title 23.8" Full HD TFT LCD

BUYER	
MODEL	

SUPPLIER	LG Display Co., Ltd.
*MODEL	LM238WF1
SUFFIX	SLK1

*When you obtain standard approval, please use the above model name without suffix

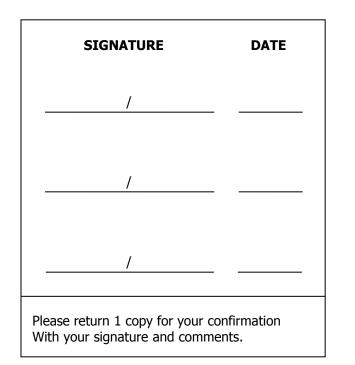

APPROVED BY	DATE
W.G. Kweon / G.Manager	
REVIEWED BY	
G.J. Han / Manager [C]	
S.Y. An / Manager [M]	
T.H. Shin / Manager [P]	
PREPARED BY	
T.H. Ha / Engineer	



<u>Contents</u>

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	6
3-1	ELECTRICAL CHARACTREISTICS	6
3-2	INTERFACE CONNECTIONS	9
3-3	LVDS CHARACTREISTICS	12
3-4	SIGNAL TIMING SPECIFICATIONS	15
3-5	SIGNAL TIMING WAVEFORMS	16
3-6	COLOR INPUT DATA REFERNECE	17
3-7	POWER SEQUENCE AND DIP CONDITION FOR LCD MODULE	18
4	OPTICAL SPECIFICATIONS	20
5	MECHANICAL CHARACTERISTICS	26
6	RELIABLITY	29
7	INTERNATIONAL STANDARDS	30
7-1	SAFETY	30
7-2	ENVIRONMENT	30
8	PACKING	31
8-1	DESIGNATION OF LOT MARK	31
8-2	PACKING FORM	31
9	PRECAUTIONS	32
9-1	MOUNTING PRECAUTIONS	32
9-2	OPERATING PRECAUTIONS	32
9-3	ELECTROSTATIC DISCHARGE CONTROL	33
9-4	PRECAUTIONS FOR STRONG LIGHT EXPOSURE	33
9-5	STORAGE	33
9-6	HANDLING PRECAUTIONS FOR PROTECTION FILM	33




RECORD OF REVISIONS

Revision No	Revision Date	Page	Description
0.0	Oct. 12. 2015	-	First Draft, Preliminary Specifications
0.1	Dec. 14. 2015	6	Update the Electrical Characteristics
		8	Update the LED Bar ELECTRICAL CHARACTERISTICS
		11	Update the BACKLIGHT CONNECTOR PIN CONFIGURATION
0.2	Jan. 04. 2016	18	Delete the Option Signal Sentence ("Mstar selection"), T8, T9
0.3	Mar. 17. 2016	27, 28	Update the Mechanical Drawing
1.0	Mar. 24. 2016	18	Update the Power Sequence



1. General Description

LM238WF1 is a Color Active Matrix Liquid Crystal Display with a Light Emitting Diode(WLED) backlight system without LED driver. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally black mode. It has a 23.8 inch diagonally measured active display area with FHD resolution (1080 horizontal by 1920 vertical pixels array) Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 8-bit gray scale signal for each dot, thus, presenting a palette of more than 16.78 Million/Billion colors. It has been designed to apply the 8-bit 2port LVDS interface. It is intended to support displays where high brightness, super wide viewing angle, high color saturation, and high color are important.

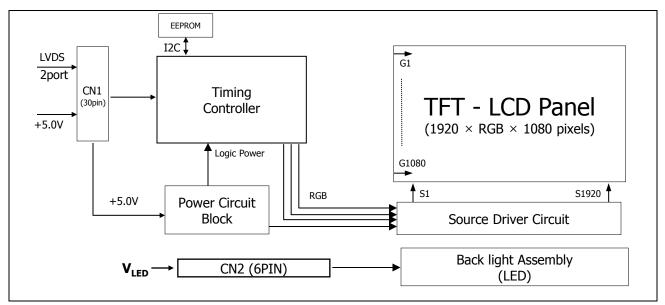

[Figure 1] Block diagram

Astive Consen Cine	22.0 in the of (CO.4.70 mm) discourse		
Active Screen Size	23.8 inches(604.70mm) diagonal		
Outline Dimension	543.0(H) x 317.4(V) x 11.2(D) mm (Typ.)		
Pixel Pitch	0.2745 mm x 0.2745 mm		
Pixel Format	1920 horiz. By 1080 vert. Pixels RGB stripes arrangement		
Color Depth	16.78M colors (6bit + A-FRC)		
Luminance, White	250 cd/m ² (Center 1 Point, Typ.)		
Viewing Angle(CR>10)	View Angle Free (R/L 178(Typ.), U/D 178(Typ.))		
Power Consumption	Total 12.2 Watt (Typ.) (2.3 Watt @VLCD, 9.9 Watt @Is= 90 mA)		
Weight	2,000 g (typ.)		
Display Operating Mode	Transmissive mode, normally black		
Panel type	Reverse type		
Surface Treatment	Hard coating(3H), Anti-glare treatment of the front polarizer		

General Features

2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Parameter	Symbol	Valu	les	Units	Notes	
Palailletei	Symbol	Min	Max		Notes	
Power Input Voltage	VLCD	-0.3	6.0	Vdc	at 25 \pm 2°C	
Operating Temperature	Тор	0	50	°C		
Storage Temperature	Тѕт	-20	60	°C	1, 2, 3	
Operating Ambient Humidity	Нор	10	90	%RH		
Storage Humidity	Нѕт	10	90	%RH		
LCM Surface Temperature (Operation)	T _{Surface}	0	65	ĉ	1, 4	

Note : 1. Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39 °C Max, and no condensation of water.


2. Maximum Storage Humidity is up to 40° C, 70% RH only for 4 corner light leakage Mura.

3. Storage condition is guaranteed under packing condition

4. LCM Surface Temperature should be Min. 0 $^\circ C$ and Max. 65 $^\circ C$ under the VLCD=5.0V,

fV=60Hz, 25°C ambient Temp. no humidity control and LED string current is typical value.

FIG.2 Temperature and relative humidity

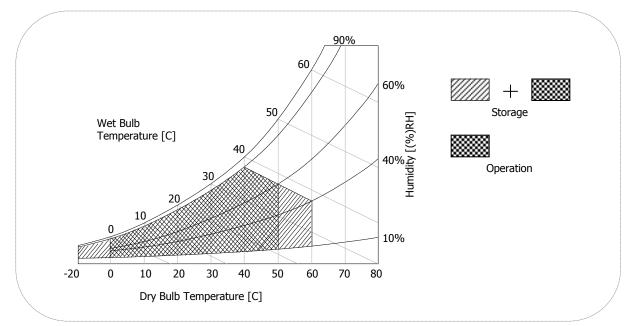

3. Electrical Specifications

3-1. Electrical Characteristics

It requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input power for the LED/Backlight, is typically generated by a LED Driver. The LED Driver is an external unit to the LCDs.

Table 2-1. ELECTRICAL CHARACTERISTICS

Parameter	Symbol		Values	Unit	Notes	
Parameter	Symbol	Min	Тур	Max	Unit	Notes
MODULE :						
Power Supply Input Voltage	VLCD	4.5	5	5.5	Vdc	
Permissive Power Input Ripple	VdRF			400	mV _{p-p}	1
Device Cumply Input Current	ILCD	-	460	575	mA	2
Power Supply Input Current		-	610	762	mA	3
Davies Consumption	Рс түр	-	2.3	2.88	Watt	2
Power Consumption	Рс мах	-	3.05	3.81	Watt	3
Rush current	Irush	-	-	3	А	4

Note :

1. Permissive power ripple should be measured under V_{LCD} =5.0V, 25°C, fV(frame frequency)=60Hz condition and At that time, we recommend the bandwidth configuration of oscilloscope is to be under 20Mhz. See the next page.

- 2. The specified current and power consumption are under the V_{LCD}=5.0V, 25 °C, f_V =60Hz condition whereas mosaic pattern(8 x 6) is displayed and f_V is the frame frequency.
- 3. The current is specified at the maximum current pattern.
- 4. Maximum Condition of Inrush current :


The duration of rush current is about 5ms and rising time of power Input is 0.5ms (min.).

5. V_{LCD} level must be measured at two points on LCM PCB - between V_{LCD} (test point) and LCM Ground. The measured results need to meet the Power supply input voltage specification.

(Test condition : maximum power pattern , 25°C, fV=60Hz)




• **Permissive Power input ripple (** V_{LCD} =5.0V, 25°C, fv (frame frequency)=60Hz condition)






• Power consumption (V_{LCD} =5V, 25°C, fV (frame frequency=60Hz condition)



Typical power Pattern



Maximum power Pattern

FIG.3 Mosaic pattern & White Pattern for power consumption measurement

Table 2-2. LED Bar ELECTRICAL CHARACTERISTICS

Parameter	Granhal		Unit	Notes		
Parameter	Symbol	Min.	Тур.	Max.	Unit	Notes
LED String Current	Is	-	90	95	mA	1, 2, 5
LED String Voltage	Vs	51.3	54.9	58.5	V	1, 5
Power Consumption	PBar	-	9.9	10.5	Watt	1, 2, 4
LED Life Time	LED_LT	30,000	-	-	Hrs	3

Notes) The LED Bar consists of 36 LED packages, 2 strings (parallel) x 18packages (serial)

LED driver design guide

- : The design of the LED driver must have specifications for the LED in LCD Assembly.
 - The performance of the LED in LCM, for example life time or brightness, is extremely influenced by the characteristics of the LED driver.

So all the parameters of an LED driver should be carefully designed and output current should be Constant current control.

Please control feedback current of each string individually to compensate the current variation among the strings of LEDs.

When you design or order the LED driver, please make sure unwanted lighting caused by the mismatch of the LED and the LED driver (no lighting, flicker, etc) never occurs.

When you confirm it, the LCD module should be operated in the same condition as installed in your instrument.

- 1. The specified values are for a single LED bar.
- 2. The specified current is defined as the input current for a single LED string with 100% duty cycle.
- 3. The specified voltage is input LED string and Bar voltage at typical Current 100% duty current.
- 4. The LED life time is defined as the time when brightness of LED packages become 50% or less than the initial value under the conditions at Ta = $25 \pm 2^{\circ}$ C and LED string current is typical value.
- 5. The power consumption shown above does not include loss of external driver. The typical power consumption is calculated as $P_{Bar} = Vs(Typ.) \times Is(Typ.) \times No.$ of strings. The maximum power consumption is calculated as $P_{Bar} = Vs(Max.) \times Is(Typ.) \times No.$ of strings.
- 6. LED operating conditions are must not exceed Max. ratings.

3-2. Interface Connections

3-2-1. LCD Module

- LCD Connector(CN1) : IS100-L300-C23 (UJU) , GT103-30S-HF15 (LSM)
- Mating Connector : FI-X30C2L (Manufactured by JAE) or Equivalent

Table 3. MODULE CONNECTOR(CN1) PIN CONFIGURATION

No	Symbol	Description	No	Symbol	Symbol
1	FR0M	Minus signal of odd channel 0 (LVDS)	16	SR1P	Plus signal of even channel 1 (LVDS)
2	FR0P	Plus signal of odd channel 0 (LVDS)	17	GND	Ground
3	FR1M	Minus signal of odd channel 1 (LVDS)	18	SR2M	Minus signal of even channel 2 (LVDS)
4	FR1P	Plus signal of odd channel 1 (LVDS)	19	SR2P	Plus signal of even channel 2 (LVDS)
5	FR2M	Minus signal of odd channel 2 (LVDS)	20	SCLKINM	Minus signal of even clock channel (LVDS)
6	FR2P	Plus signal of odd channel 2 (LVDS)	21	SCLKINP	Plus signal of even clock channel (LVDS)
7	GND	Ground	22	SR3M	Minus signal of even channel 3 (LVDS)
8	FCLKINM	Minus signal of odd clock channel (LVDS)	23	SR3P	Plus signal of even channel 3 (LVDS)
9	FCLKINP	Plus signal of odd clock channel (LVDS)	24	GND	Ground
10	FR3M	Minus signal of odd channel 3 (LVDS)	25	NC	No Connection (I2C Serial interface for LCM)
11	FR3P	Plus signal of odd channel 3 (LVDS)	26	NC	No Connection.(I2C Serial interface for LCM)
12	SR0M	Minus signal of even channel 0 (LVDS)	27	ITLC	Interlace mode selection
13	SR0P	Plus signal of even channel 0 (LVDS)	28	VLCD	Power Supply +5.0V
14	GND	Ground	29	VLCD	Power Supply +5.0V
15	SR1M	Minus signal of even channel 1 (LVDS)	30	VLCD	Power Supply +5.0V

Notes : 1. All GND(ground) pins should be connected together to the LCD module's metal frame.

- 2. All V_{LCD} (power input) pins should be connected together.
- 3. All Input levels of LVDS signals are based on the EIA 644 Standard.
- 4. Always all LVDS signal and clock input should be 8 channels and synchronized.
- 5. ITLC is Interlace mode selection pin. (L : Normal Mode, H : Interlace Mode) If you don't use this pin, it should be connected to GND.

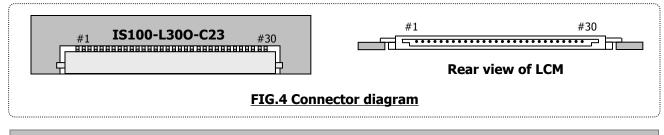




Table 4. REQUIRED SIGNAL ASSIGNMENT FOR Flat Link (TI:SN75LVDS83) Transmitter

Pin #	Pin Name	Require Signal	Pin #	Pin Name	Require Signal
1	Vcc	Power Supply for TTL Input	29	GND	Ground pin for TTL
2	D5	TTL Input (R7)	30	D26	TTL Input (DE)
3	D6	TTL Input (R5)	31	T _X CLKIN	TTL Level clock Input
4	D7	TTL Input (G0)	32	PWR DWN	Power Down Input
5	GND	Ground pin for TTL	33	PLL GND	Ground pin for PLL
6	D8	TTL Input (G1)	34	PLL Vcc	Power Supply for PLL
7	D9	TTL Input (G2)	35	PLL GND	Ground pin for PLL
8	D10	TTL Input (G6)	36	LVDS GND	Ground pin for LVDS
9	Vcc	Power Supply for TTL Input	37	TxOUT3+	Positive LVDS differential data output 3
10	D11	TTL Input (G7)	38	TxOUT3 –	Negative LVDS differential data output 3
11	D12	TTL Input (G3)	39	T _X CLKOUT +	Positive LVDS differential clock output
12	D13	TTL Input (G4)	40	T _X CLKOUT -	Negative LVDS differential clock output
13	GND	Ground pin for TTL	41	T _X OUT2+	Positive LVDS differential data output 2
14	D14	TTL Input (G5)	42	T _X OUT2 –	Negative LVDS differential data output 2
15	D15	TTL Input (B0)	43	LVDS GND	Ground pin for LVDS
16	D16	TTL Input (B6)	44	LVDS Vcc	Power Supply for LVDS
17	Vcc	Power Supply for TTL Input	45	T _X OUT1+	Positive LVDS differential data output 1
18	D17	TTL Input (B7)	46	T _X OUT1-	Negative LVDS differential data output 1
19	D18	TTL Input (B1)	47	T _X OUT0+	Positive LVDS differential data output 0
20	D19	TTL Input (B2)	48	T _X OUT0-	Negative LVDS differential data output 0
21	GND	Ground pin for TTL Input	49	LVDS GND	Ground pin for LVDS
22	D20	TTL Input (B3)	50	D27	TTL Input (R6)
23	D21	TTL Input (B4)	51	D0	TTL Input (R0)
24	D22	TTL Input (B5)	52	D1	TTL Input (R1)
25	D23	TTL Input (RSVD)	53	GND	Ground pin for TTL
26	Vcc	Power Supply for TTL Input	54	D2	TTL Input (R2)
27	D24	TTL Input (HSYNC)	55	D3	TTL Input (R3)
28	D25	TTL Input (VSYNC)	56	D4	TTL Input (R4)

Notes: 1. Refer to LVDS Transmitter Data Sheet for detail descriptions.


2. 7 means MSB and 0 means LSB at R,G,B pixel data

3-2-2. Backlight Interface

Table 3. BACKLIGHT CONNECTOR PIN CONFIGURATION(CN2)

The LED interface connector is a model SM06B-SHJH(HF)_Manufactured by JST or equivalent. The mating connector is a SHJP-06V-S(HF), SHJP-06V-A-K(HF) or equivalent. The pin configuration for the connector is shown in the table below.


Pin	Symbol	Description
1	FB1	Channel1 Current Feedback
2	NC	NC
3	VLED	LED Power Supply
4	VLED	LED Power Supply
5	NC	NC
6	FB2	Channel2 Current Feedback

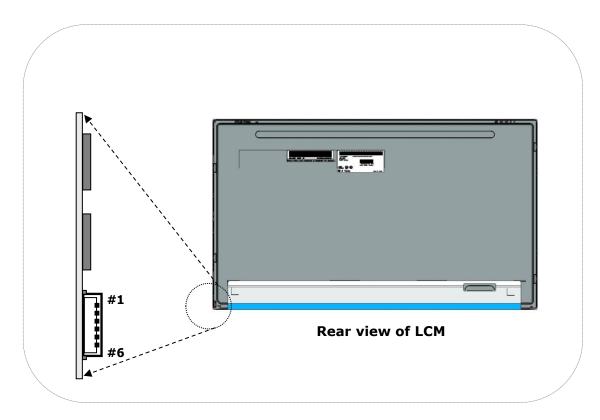

[Figure 5] Backlight connector view

3-3. LVDS characteristics

3-3-1. DC Specification

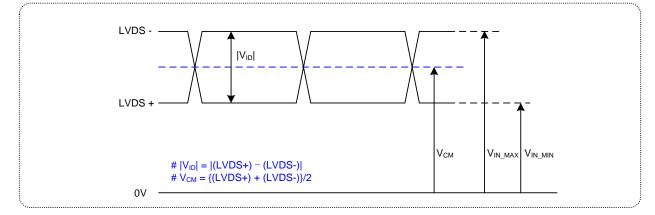



Description	Symbol	Min	Max	Unit	Notes
LVDS Differential Voltage	V _{ID}	200	600	mV	-
LVDS Common mode Voltage	V _{CM}	1.0	1.5	V	-
LVDS Input Voltage Range	V _{IN}	0.7	1.8	V	-
Change in common mode Voltage	ΔVсм	-	250	mV	-

Notes : Dose not have any Noise & Peaking in LVDS Signal



3-3-2. AC Specification

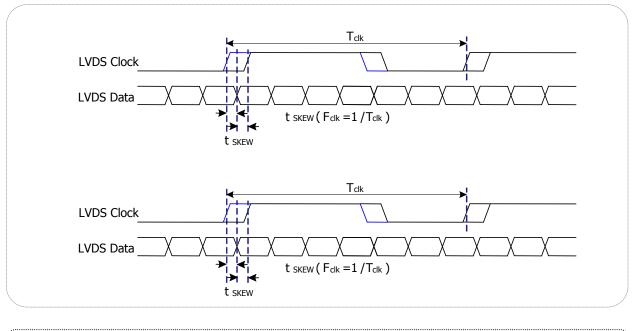

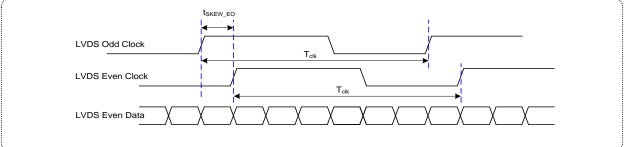

< Clock skew margin between channel >

Description	Symbol	Min	Max	Unit	Notes
	t _{skew}	- 300	+ 300	ps	95MHz > Fclk ≥ 85MHz
LVDS Clock to Data Skew Margin	t _{skew}	- 400	+ 400	ps	85MHz > Fclk ≥ 65MHz
	t _{skew}	- 600	+ 600	ps	65MHz > Fclk ≥ 30MHz
LVDS Clock to Clock Skew Margin (Even to Odd)	t _{skew_eo}	- 1/7	+ 1/7	T _{clk}	-



3-3-3. LVDS Data format

LVDS 2 Port

			•	Tclk														
RCLK +			∢	Tclk * 4/7 Tclk * 1/7				Tclk * 3/7				}			· [MSB	R7]
RXinO0 +/-	OR3	OR2	OR1	OR0	060	OR5	OR4	OR3	OR2	OR1	OR0	OG0	OR5	OR4			R6 R5	
RXinO1 +/-	OG4	OG3	OG2	OG1	OB1	ОВО	OG5	OG4		OG2	OG1	OB1	ОВО	OG5			R4	
RXinO2 +/-	OB5	OB4	OB3	OB2	DE	VSYNC	HSYNC	OB5	OB4	ОВЗ	OB2	DE	VSYNC	HSYNC			R3 R2	
RXinO3 +/-	OG7	OG6	OR7	OR6	x	OB7	OB6	OG7	OG6	OR7		x	OB7	OB6			R1	
RXinE0 +/-	ER3	ER2	ER1	ER0	EG0	ER5	ER4	ER3	ER2	ER1	ER0	EG0	ER5	ER4		LSB	R0]
RXinE1 +/-	EG4	EG3	EG2	EG1	EB1	EB0	EG5	EG4	EG3	EG2	EG1	EB1	EB0	EG5			D = 1st N = 2nd	
RXinE2 +/-	EB5	EB4	EB3	EB2	DE	VSYNC	HSYNC	EB5	EB4	ЕВЗ	EB2	DE	VSYNC	HSYNC				
RXinE3 +/-	EG7	EG6	ER7	ER6	×	ЕВ7	EB6	EG7	EG6	ER7	ER6	×	ЕВ7	EB6				
	Previous(N-1)th Cycle							Cycle—		\longrightarrow	-Next	N+1)th	Cycle—					
•••••••••••••••••••••••••••••••••••••••																		

< LVDS Data Format >

3-4. Signal Timing Specifications

This is signal timing required at the input of the TMDS transmitter. All of the interface signal timing should be satisfied with the following specifications for it's proper operation.

ITEM	Symbol		Min	Тур	Max	Unit	Note
DCLK	Period	tCLK	11.11	13.89	16.7	ns	
DCLK	Frequency	-	60	72	90	MHz	5
	Period	tHP	1024	1088	1120	tCLK	
Haves	Horizontal Valid	tHV	960	960	960	tCLK	
Hsync	Horizontal Blank	tHB	64	128	160		
	Frequency	fH	54.17	66	88.27	KHz	
	Period	tVP	1090	1100	1160	tHP	
Maria	Vertical Valid	tVV	1080	1080	1080	tHP	
VSYNC	Vsync Vertical Blank		10	20	80	tHP	
	Frequency	fV	48	60	75	Hz	

Table 6. TIMING TABLE


Note:

- 1. DE Only mode operation. The input of Hsync & Vsync signal does not have an effect on LCD normal operation.
- 2. The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rates.
- 3. Horizontal period should be times of character number (2).
- 4. The Max frequency of 1920X1080 resolution is 82.5Mhz




3-5. Signal Timing Waveforms


1. DCLK , DE, DATA waveforms

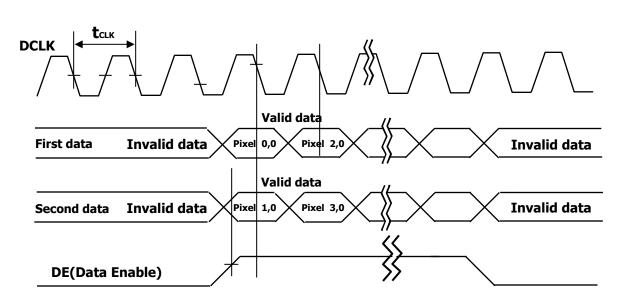

2. Horizontal waveform

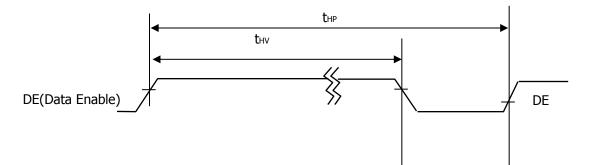

3. Vertical waveform

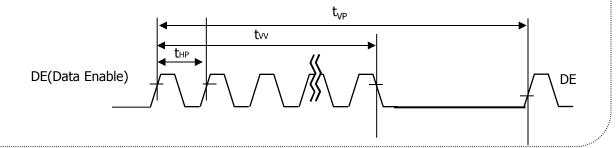

3-6. Color Input Data Reference

The Brightness of each primary color(red,green,blue) is based on the 8-bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 7. COLOR DATA REFERENCE

											-	I	npu	t Co	olor	Dat	ta									
	Color					RE	D							GRI	EEN							BL	UE			
			MS								MS							SB								SB
				-			-		R1	-		_	-	_	-	G2	_	_				_	-	_	B1	
	Black		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (255)		1	1	1	1	1	1	1	1		0	0	0	0	0	0	0		0	0	0	0	0	0	0
	Green (255)		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Basic	Blue (255)		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Color	Cyan		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta		1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	RED (000)	Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (001)		0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
RED							•																			
	RED (254)		1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (255)		1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (000)	Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (001)		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
GREEN							•																			
	GREEN (254)		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	GREEN (255)		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	BLUE (000)	Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (001)		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
BLUE																										
	BLUE (254)		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	BLUE (255)		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

3-7. Power Sequence & Dip condition for LCD Module

3-7-1. Power Sequence

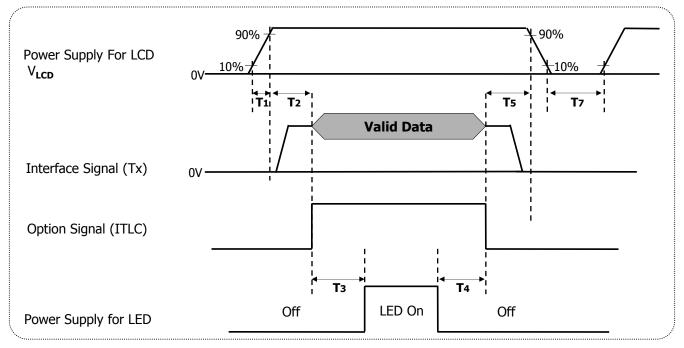


Table 7. POWER SEQUENCE

Devementer		Unite		
Parameter	Min	Тур	Max	Units
T1	0.5	-	10	ms
T2	0.01	-	50	ms
Т3	500	-	-	ms
T4	200	-	-	ms
Т5	0.01	-	50	ms
Т7	1000		-	ms

Notes :

1. The above power sequence should be satisfied at these case

-.AC/DC Power On/Off

-.Mode change (Resolution, frequency, timing, sleep mode, Color depth change, etc.) If not to follow power sequence, there is a risk of abnormal display.

- 2. Please avoid floating state of interface signal at invalid period.
- 3. When the interface signal is invalid, be sure to pull down the power supply for LCD V_{LCD} to 0V.
- 4. The valid data must be complied with signal timing specifications (Timing Table).
- 5. LED power must be turn on after power supply for LCD an interface signal are valid.
- 6 . If V_{LCD} Power is Changed during on status, be sure to Pull down the LED Power on to 0V



3-7-2. V_{LCD} Power Dip Condition

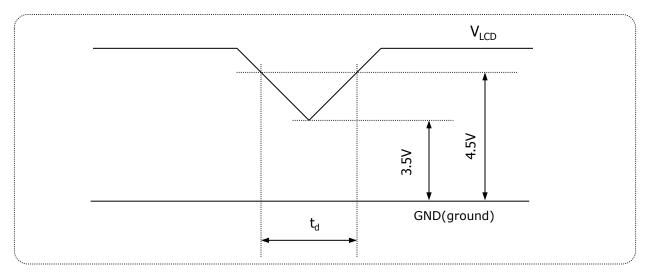


FIG.6 Power dip condition

1) Dip condition

3.5V \leq V_{LCD} < 4.5V , t_d \leq 20ms

2) V_{LCD}< 3.5V

 V_{LCD} -dip conditions should also follow the Power On/Off conditions for supply voltage.



4. Optical Specifications

Optical characteristics are determined after the unit has been 'ON' for approximately 30 minutes in a dark environment at $25\pm2^{\circ}$ C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and θ equal to 0 ° and aperture 1 degree.

FIG. 1 presents additional information concerning the measurement equipment and method.

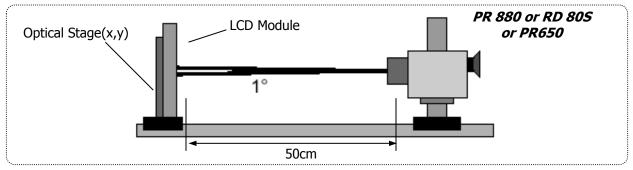


FIG.7 Optical Characteristic Measurement Equipment and Method

Table 9. OPTICAL CHARACTERISTICS

(Ta=25 °C, V_{LCD} =5V, f_V =60Hz Dclk=144MHz, I_S=90mA)

Damana	•	Complex		Values		Unite	Natas
Parame	eter	Symbol	Min	Тур	Max	Units	Notes
Contrast Ratio		CR	700	1000	-		1
Surface Luminance,	white	L _{WH}	200	250	-	cd/m ²	2
Luminance Variation		δ_{WHITE}	75	-	-	%	3
Response Time	Gray To Gray	T _{GTG_AVR}	-	14	25	ms	4
	RED	Rx		0.652			
		Ry	1	0.336			
	GREEN	Gx]	0.321			
Color Coordinates		Gy] Тур	0.610	Тур +0.03		
[CIE1931] (By PR650)	BLUE	Bx	-0.03	0.153			
		Ву	1	0.061			
	WHITE	Wx	1	0.313			
		Wy]	0.329			
Color Shift	Horizontal	$\theta_{\text{CST_H}}$	-	140	-	Desmas	-
(Avg. Δu′v′ < 0.02)	Vertical	$\theta_{\text{CST_V}}$	-	100	-	Degree	5
Viewing Angle (CR>1	.0)						
Comoral	Horizontal	θ _H	170	178	-	Deamas	
General	Vertical	θ _V	170	178	-	Degree	6
Gray Scale		-	-	2.2	-		7

Ver. 1.0



Notes 1. Contrast Ratio(CR) is defined mathematically as : (By PR880)

 $Contrast Ratio = \frac{Surface Luminance with all white pixels}{Surface Luminance with all black pixels}$

It is measured at center point(Location P1)

- 2. Surface luminance(LWH) is luminance value at Center 1 point(P1) across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG.8 (By PR880)
- 3. The variation in surface luminance , δ WHITE is defined as : (By PR880)

 $\delta_{WHITE} = \frac{\text{Minimum}(L_{P1}, L_{P2}, \dots, L_{P9})}{\text{Maximum}(L_{P1}, L_{P2}, \dots, L_{P9})} \times 100$

Where L1 to L9 are the luminance with all pixels displaying white at 9 locations. For more information see FIG.8

- 4. Gray to gray response time is the time required for the display to transition from gray to gray. For additional information see Table 10. (By RD80S)
- 5. Color shift is the angle at which the average color difference for all Macbeth is lower than 0.02. For more information see FIG.9 (By EZ Contrast)

- Color difference ($\Delta u'v'$)


$$u' = \frac{4x}{-2x + 12y + 3} \qquad v' = \frac{9y}{-2x + 12y + 3} \qquad \Delta u'v' = \sqrt{(u'_1 - u'_2)^2 + (v'_1 - v'_2)^2}$$

$$Avg(\Delta u'v') = \frac{\sum_{i=1}^{24} (\Delta u'v')i}{24} \qquad u'1, v'1 : u'v' \text{ value at viewing angle direction} \\ u'2, v'2 : u'v' \text{ value at front } (\theta = 0) \\ i : \text{ Macbeth chart number (Define 23 page)}$$

- Pattern size : 25% Box size

Viewing angle direction of color shift : Horizontal, Vertical

- 6. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG.10 (By PR880)
- 7. Gamma Value is approximately 2.2. For more information see Table 11.

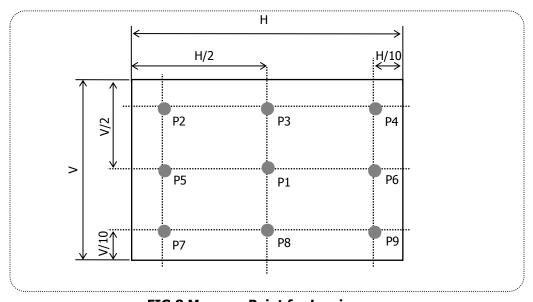

Measuring point for surface luminance & measuring point for luminance variation.

FIG.8 Measure Point for Luminance

The Gray to Gray response time is defined as the following figure and shall be measured by switching the input signal for "Gray To Gray ".


- Gray step : 5 Step
- TGTG_AVR is the total average time at rising time and falling time for "Gray To Gray ".
- if system use ODC (Over Driving Circuit) function, Gray to Gary response time may be 5ms~8ms GtG * it depends on Overshoot rate.

Crow to C			Rising Time								
Gray to G	гау	G255	G191	G127	G63	G0					
Falling Time	G255	\square									
	G191										
	G127			\backslash							
	G63				\backslash						
	G0					/					

Table. 10 GTG Gray Table



G to G(BW) Response time is defined as the following figure and shall be measured by switching the input signal for "Gray(N)" and "Black or White".

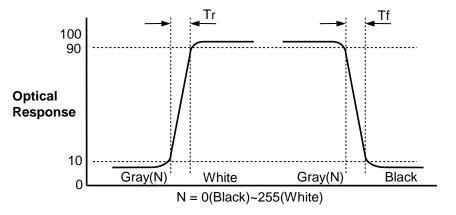

Color shift is defined as the following test pattern and color.

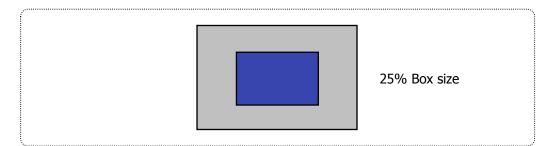



FIG.9 Color Shift Test Pattern

Average RGB values in Bruce RGB for Macbeth Chart

	Dark skin (i=1)	Light skin	Blue sky	Foliage	Blue flower	Bluish green
R	98	206	85	77	129	114
G	56	142	112	102	118	199
В	45	123	161	46	185	178
	Orange	Purplish blue	Moderate red	Purple	Yellow green	Orange yellow
R	219	56	211	76	160	230
G	104	69	67	39	193	162
В	24	174	87	86	58	29
	Blue	Green	Red	Yellow	Magenta	Cyan
R	26	72	197	241	207	35
G	32	148	27	212	62	126
В	145	65	37	36	151	172
	White	Neutral 8	Neutral 6.5	Neutral 5	Neutral 3.5	Black
R	240	206	155	110	63	22
G	240	206	155	110	63	22
В	240	206	155	110	63	22



Dimension of viewing angle range.

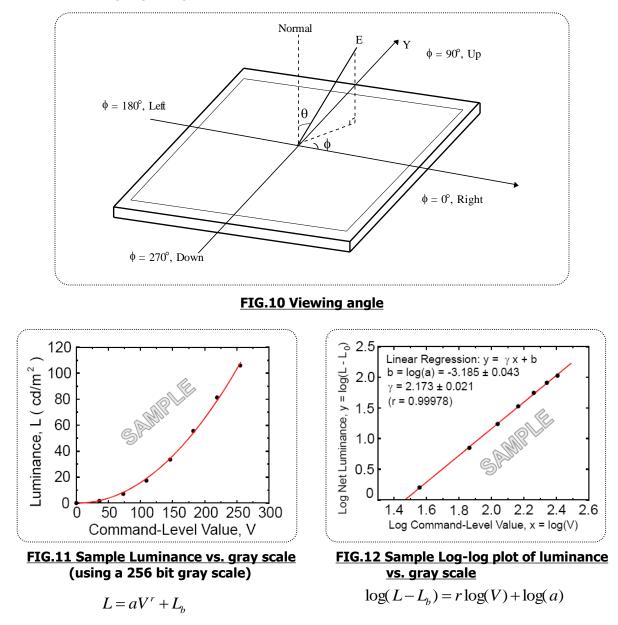

Here the Parameter α and γ relate the signal level V to the luminance L. The GAMMA we calculate from the log-log representation (FIG.11)



Table 11. Gray Scale Specification

Gray Level	Relative Luminance [%] (Typ.)
0	0.10
15	0.30
31	1.08
47	2.50
63	4.72
79	7.70
95	11.49
111	16.2
127	21.66
143	28.2
159	35.45
175	43.8
191	53.0
207	63.3
223	74.48
239	86.8
255	100

5. Mechanical Characteristics


The contents provide general mechanical characteristics. In addition the figures in the next page are detailed mechanical drawing of the LCD.

	Horizontal	543.0mm			
Outline Dimension	Vertical	317.4mm			
	Depth	11.2 mm			
Bezel Area	Horizontal	530.2mm			
	Vertical	299.6mm			
Active Display Area	Horizontal	527.04mm			
	Vertical	296.46mm			
Weight	Typ: 2,000g, Max: 2,100g				
Surface Treatment	Hard coating(3H) Anti-glare treatment of the front polarizer				

Notes : Please refer to a mechanic drawing in terms of tolerance at the next page.





<FRONT VIEW>

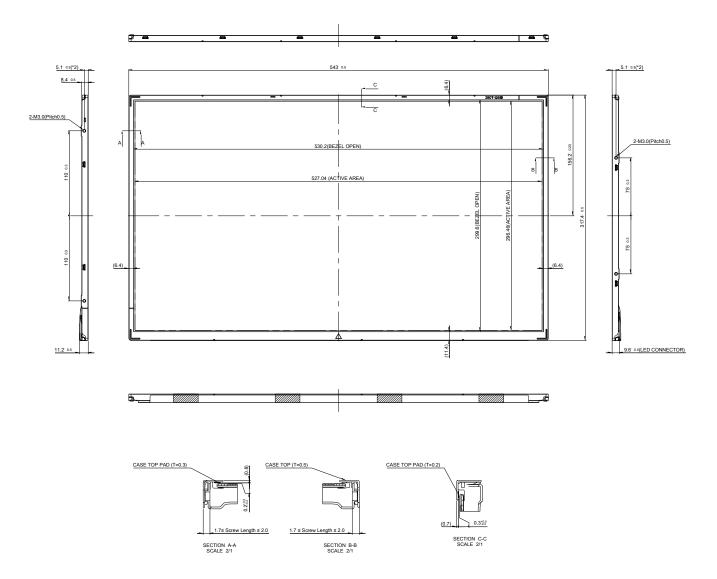



<REAR VIEW>

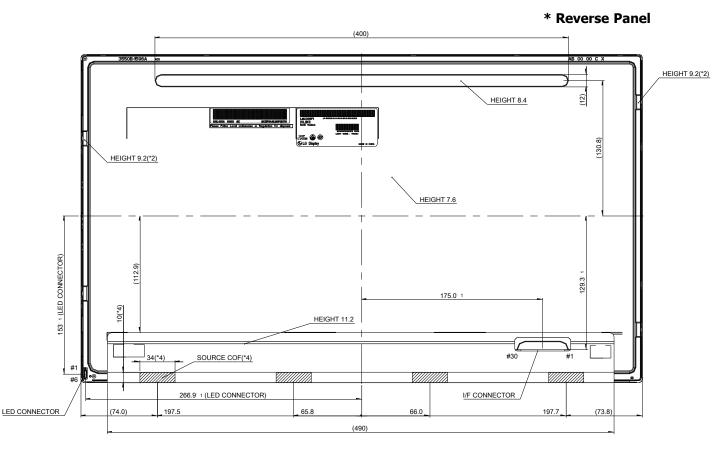



LGD Highly recommendation :

As The IPS panel is sensitive & slim, please recommend the metal frame of the system supports the panel by the double side-mount.



6. Reliability

Environment test condition

No	Test Item	Condition	Note
1	High temperature storage test	Ta= 60°C 240h	1
2	Low temperature storage test	Ta= -20°C 240h	1
3	High temperature operation test	Ta= 50°C 50%RH 240h	1
4	Low temperature operation test	Ta= 0°C 240h	1
5	Vibration test (non-operating)	Wave form : random Vibration level : 1.00G RMS Bandwidth : 10-300Hz Duration : X, Y, Z, 10 min One time each direction	
6	Shock test (non-operating)	Shock level : 100G Waveform : half sine wave, 2ms Direction : $\pm X$, $\pm Y$, $\pm Z$ One time each direction	
7	Humidity condition Operation	Ta= 40 °C ,90%RH	
8	Altitude operating storage / shipment	0 - 10,000 feet(3,048m) 0 - 40,000 feet(12,192m)	
9	Maximum Storage Humidity for 4 corner light leakage Mura.	Max 70%RH , Ta=40℃	

Note 1. Result Evaluation Criteria:

TFT-LCD panels test should take place after cooling enough at room temperature . In the standard condition, there should be no particular problems that may affect the display function.

%. T_a= Ambient Temperature

7. International Standards

7-1. Safety

- a) UL 60950-1, Underwriters Laboratories Inc. Information Technology Equipment - Safety - Part 1 : General Requirements.
- b) CAN/CSA-C22.2 No. 60950-1-07, Canadian Standards Association.
 Information Technology Equipment Safety Part 1 : General Requirements.
- c) EN 60950-1, European Committee for Electrotechnical Standardization (CENELEC). Information Technology Equipment - Safety - Part 1 : General Requirements.
- d) IEC 60950-1, The International Electrotechnical Commission (IEC). Information Technology Equipment - Safety - Part 1 : General Requirements

7-2. Environment


a) RoHS, Directive 2011/65/EU of the European Parliament and of the council of 8 June 2011



8. Packing

8-1. Designation of Lot Mark

a) Lot Mark



Note

1. YEAR

Year	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Mark	Α	В	С	D	Е	F	G	Н	J	К

2. MONTH

Month	Jan	Feb	Mar	Apr	Мау	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	А	В	С

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module. This is subject to change without prior notice.

8-2. Packing Form

- a) Package quantity in one box : 14 pcs (2 Module is packed in 1 Al Bag)
- b) Box quantity in one pallet : 12 boxes
- c) Box Size : 635 X 370 X 400



9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.
- (10) As The IPS panel is sensitive & slim, please recommend the metal frame of the system supports the panel by the double side-mount.

9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage : $V=\pm 200 \text{mV}(\text{Over and under shoot voltage})$
- (2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In Higher temperature, it becomes lower.) And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.
- (7) Please do not give any mechanical and/or acoustical impact to LCM. Otherwise, LCM can't be operated its full characteristics perfectly.
- (8) A screw which is fastened up the steels should be a machine screw.
 - (if not, it causes metallic foreign material and deal LCM a fatal blow)
- (9) Please do not set LCD on its edge.
- (10) When LCMs are used for public display defects such as Yogore, image sticking can not be guaranteed.
- (11) LCMs cannot support "Interlaced Scan Method"
- (12) When this reverse model is used as a forward-type model (PCB on top side), LGD can not guarantee any defects of LCM.
- (13) Please conduct image sticking test after 2-hour aging with Rolling Pattern and normal temperature.(25~40 ℃)

Ver. 1.0

32 / 33

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) The protection film is attached to the bezel with a small masking tape. When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ionblown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.