

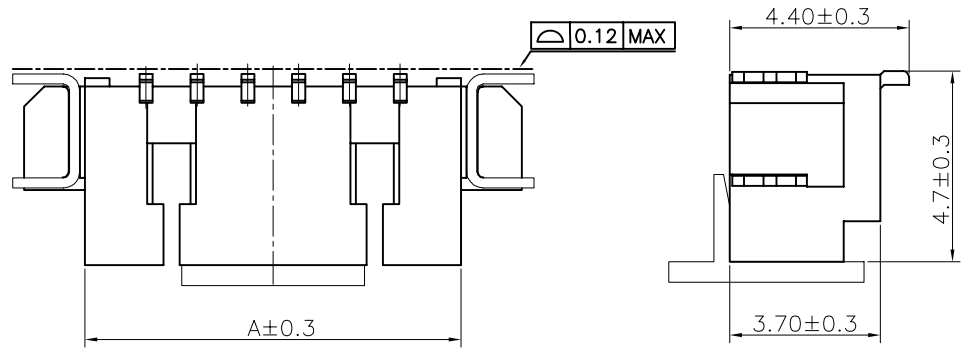
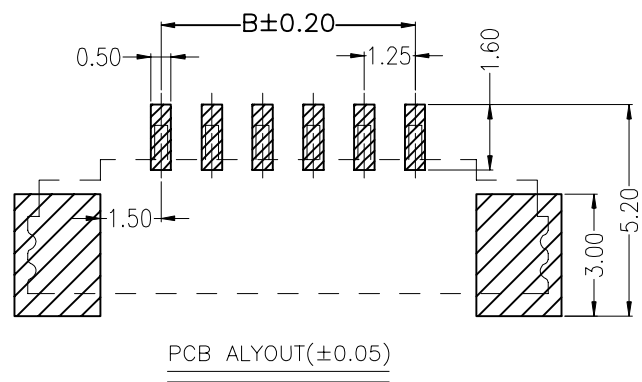


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	01	BATCH PRODUCTION INITIAL RELEASE.	2020.04.14	李全榮

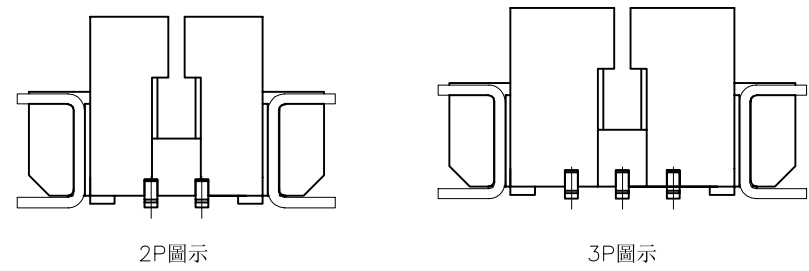


Specifications  
 Current Rating:1Amp AC/DC  
 Voltage Rating:125V AC/DC  
 Contact Resistance:20mΩ Max.  
 Insulation Resistance:100MΩ Min.  
 Dielectric Withstanding Voltage:500VAC  
 Temperature Range:-40°C to +105°C  
 Materials  
 Contact Material:Bhosphor Bronze  
 Insulator Material:LCP UL 94V-0  
 All materials must meet GREENCONN hazardous substances control standards.

CIRCUITS	DIM A	DIM B
02	4.25	1.25
03	5.50	2.50
04	6.75	3.75
05	8.00	5.00
06	9.25	6.25
07	10.50	7.50
08	11.75	8.75
09	13.00	10.00
10	14.25	11.25
11	15.50	12.50
12	16.75	13.75
13	18.00	15.00
14	19.25	16.25
15	20.50	17.50

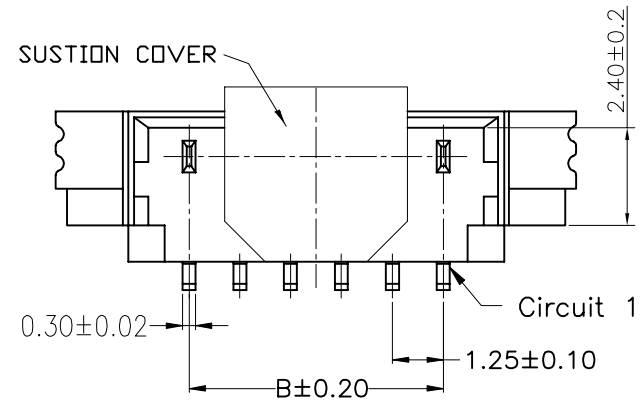

### Ordering Information

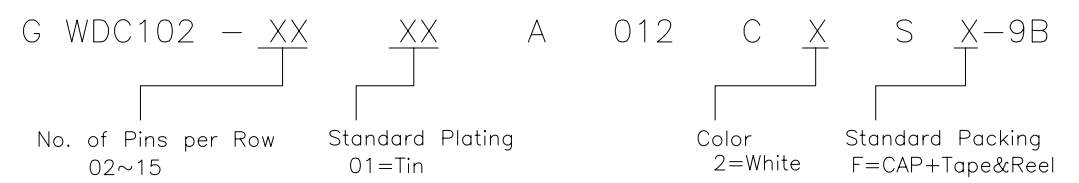

A

格稜股份有限公司  
**Greenconn Corporation**

GENERAL TOLERANCE	
X.*±	X.±
.X*±	.X±0.25
.XX*±	.XX±0.15
.XXX*±	.XXX±0.10

DESIGNED: 李全榮	DATE: 2020.04.14
CHECKED: 方秋香	DATE: 2020.04.14
APPROVED: 方秋香	DATE: 2020.04.14

DWG. NO.	GWDC102-CA12CS
PART NO.	GWDC102-XXXXA012CXSX-9B

TITLE.	1.25mm pitch Wafer
--------	--------------------

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1

1 2 3 4 5 6 7 8 9