

EMILY-RS

~8° spot beam. 14.74 mm high lens.


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 26.0 mm
Height	14.7 mm
Fastening	tape
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	10.3 kg
Quantity in Box	1690 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
EMILY-RS	Single lens	PMMA	clear
SPUTNIK-TAPE	Tape	PU tape	black

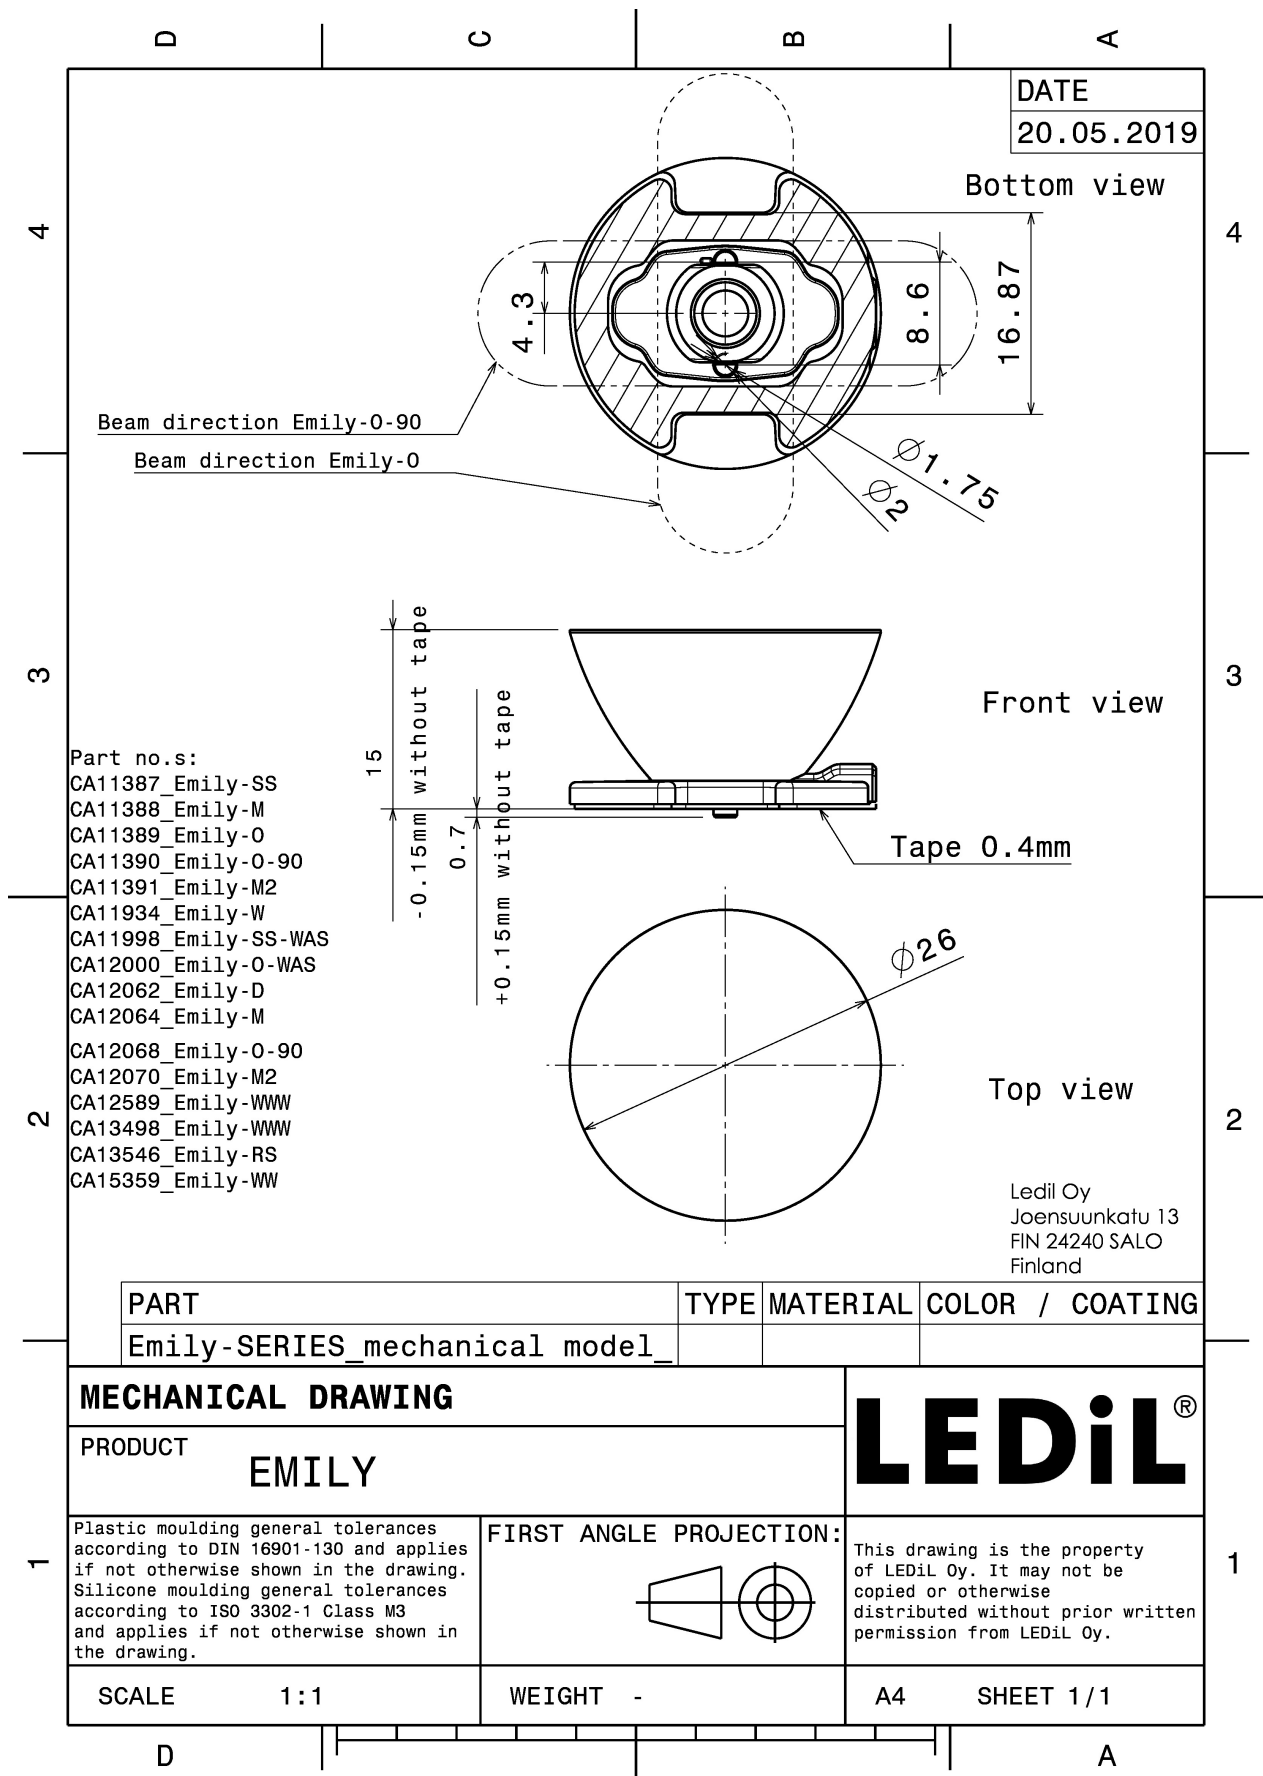


MECHANICAL DRAWING		LEDiL®
PRODUCT EMILY		
Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.	FIRST ANGLE PROJECTION: 	This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.
SCALE 1:1	WEIGHT -	A4 SHEET 1/1

PHOTOMETRIC DATA (MEASURED):


CREE

LED XB-H
 FWHM 9.0°
 Efficiency 88 %
 Peak intensity 24.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

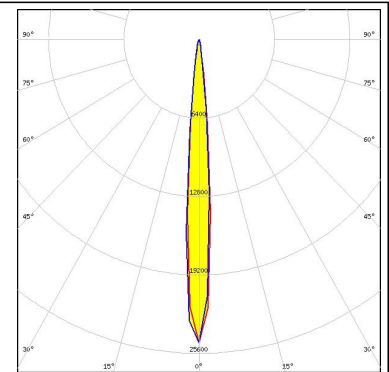



CREE

LED XP-G3
 FWHM 10.0°
 Efficiency 94 %
 Peak intensity 18.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

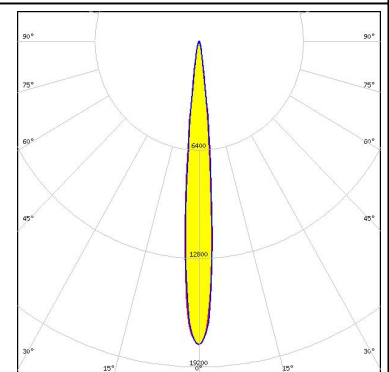


CREE

LED XP-L HD
 FWHM 13.0°
 Efficiency 89 %
 Peak intensity 13.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

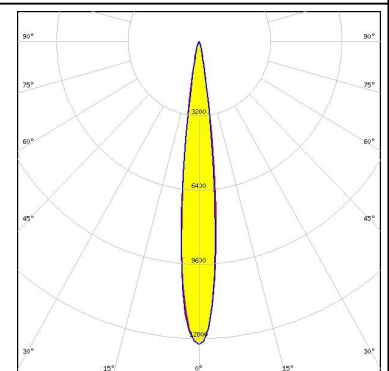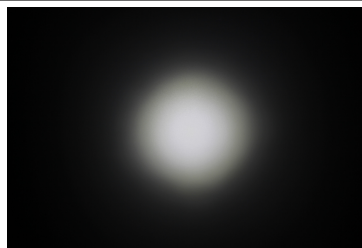

CREE



LED XP-L HI
 FWHM 8.0°
 Efficiency 88 %
 Peak intensity 28.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

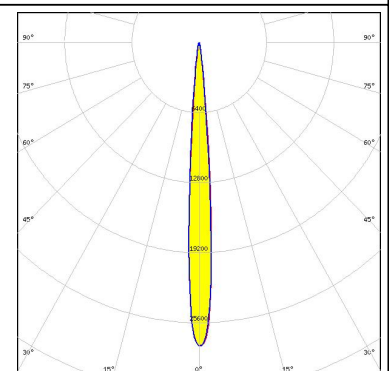


PHOTOMETRIC DATA (MEASURED):





LED XP-L2
 FWHM 13.0°
 Efficiency 93 %
 Peak intensity 10.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

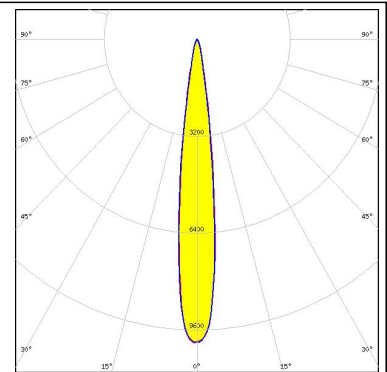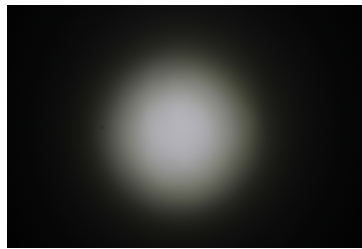


LED XQ-E HI
 FWHM 4.0°
 Efficiency 94 %
 Peak intensity 71.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

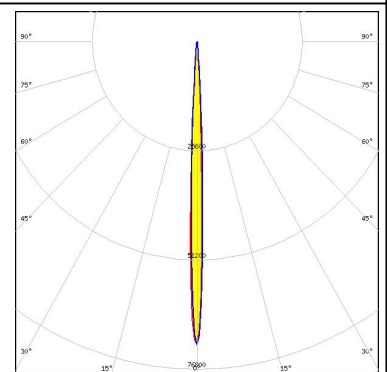

LED XT-E
 FWHM 8.0°
 Efficiency 91 %
 Peak intensity 23.900 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

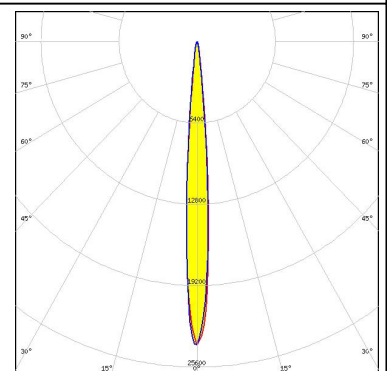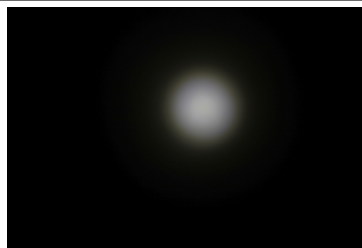


LED LUXEON Z ES
 FWHM 5.0°
 Efficiency 91 %
 Peak intensity 52.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

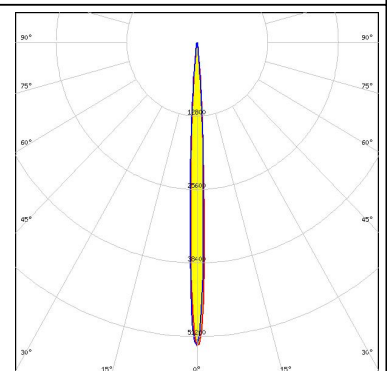



PHOTOMETRIC DATA (MEASURED):





LED NVSW219D
 FWHM 10.0°
 Efficiency 94 %
 Peak intensity 20.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

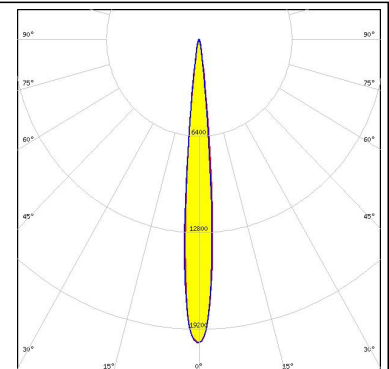

LED OSOLON Square EC
 FWHM 8.0°
 Efficiency 90 %
 Peak intensity 29.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

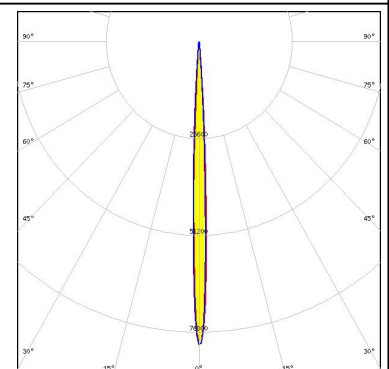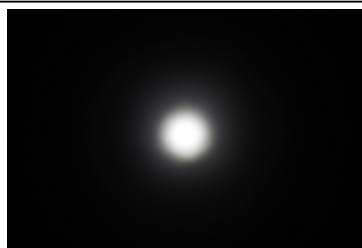

LED nPola
 FWHM 5.0°
 Efficiency 94 %
 Peak intensity 81.200 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

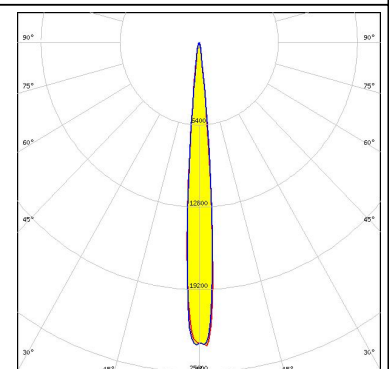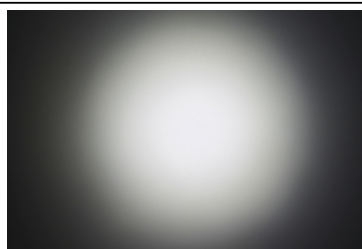


LED Z5M1/Z5M2
 FWHM 9.0°
 Efficiency 91 %
 Peak intensity 23.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


PHOTOMETRIC DATA (SIMULATED):




LED XP-E2
 FWHM 6.0°
 Efficiency 94 %
 Peak intensity 51.778 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

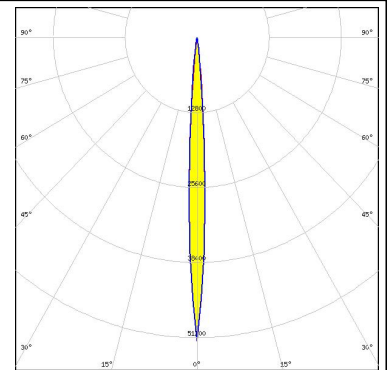


LED XP-G2
 FWHM 8.0°
 Efficiency 94 %
 Peak intensity 30.375 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

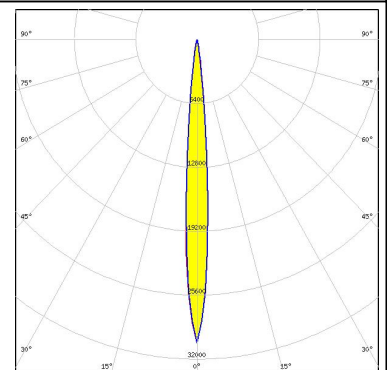

LED XP-G2 HE
 FWHM 10.0°
 Efficiency 95 %
 Peak intensity 19.050 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

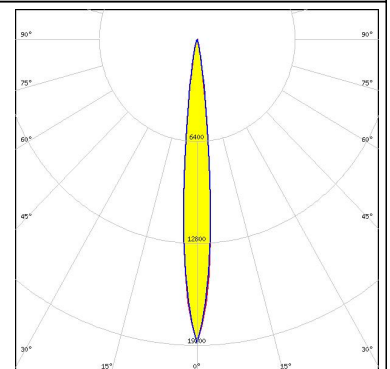

LED LUXEON Rebel
 FWHM 6.0°
 Efficiency 94 %
 Peak intensity 41.509 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

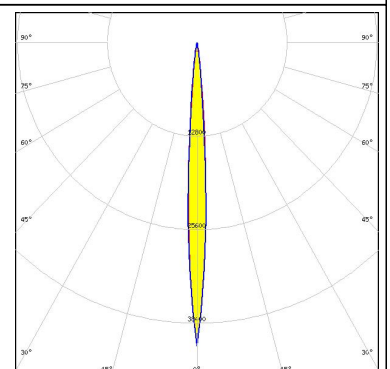

PHOTOMETRIC DATA (SIMULATED):

<p>LUMILEDS</p> <p>LED LUXEON Rebel Plus FWHM 6.0° Efficiency 94 % Peak intensity 42.128 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>LUMILEDS</p> <p>LED LUXEON Z FWHM 5.9° Efficiency 94 % Peak intensity 65.300 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>NICHIA</p> <p>LED NCSxE17A FWHM 8.0° Efficiency 92 % Peak intensity 32.543 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>NICHIA</p> <p>LED NVSxE21A FWHM 8.0° Efficiency 93 % Peak intensity 26.245 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

PHOTOMETRIC DATA (SIMULATED):


<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ P 3030</p> <p>FWHM 10.0°</p> <p>Efficiency 96 %</p> <p>Peak intensity 20.829 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSLON Black</p> <p>FWHM 11.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 19.700 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSLON Black Flat</p> <p>FWHM 6.3°</p> <p>Efficiency 94 %</p> <p>Peak intensity 50.400 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSLON Square CSSRM2/CSSRM3</p> <p>FWHM 11.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 19.400 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	

PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED OSLON SSL 80
 FWHM 7.0°
 Efficiency 94 %
 Peak intensity 38.044 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

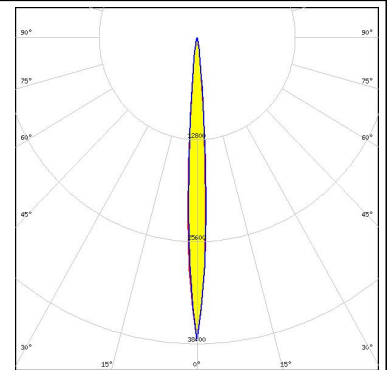

OSRAM

Opto Semiconductors

LED SFH 4170S
 FWHM 6.0°
 Efficiency 87 %
 Peak intensity cd/lm
 LEDs/each optic 1
 Light colour IR
 Required components:

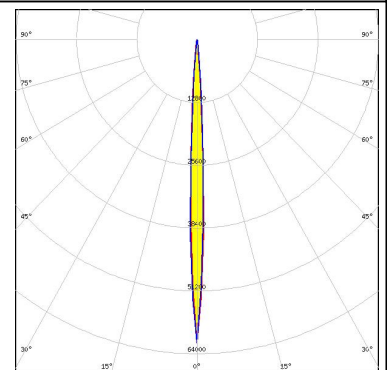


OSRAM

Opto Semiconductors

LED SFH 4716AS
 FWHM 8.0°
 Efficiency 96 %
 Peak intensity cd/lm
 LEDs/each optic 1
 Light colour IR
 Required components:

SAMSUNG

LED LM301B
 FWHM 9.0°
 Efficiency 94 %
 Peak intensity 28.460 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

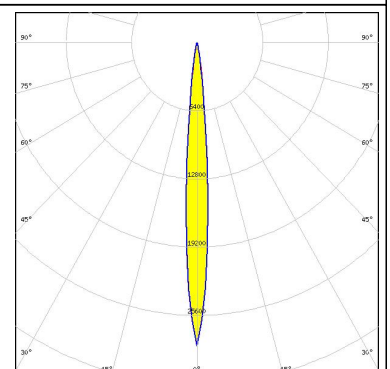

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)