

Specifications

Insulation Resistance:	1,000M Ω min. at 500V DC
Dielectric Withstanding Voltage:	700V AC for 1 minute
Contact Resistance:	30m Ω max. at 10mA/20mV max.
Current Rating:	1A max.
Operating Temperature Range:	-55°C to +170°C
Mating Cycles:	10,000 insertions min.

Materials and Finish

Housing: Polyetherimide (PEI), glass-filled
 Contacts: Beryllium Copper (BeCu)
 Plating: Gold over Nickel

Features

- For inserting SOJ packages in Live-bug orientation
- Outstanding durability with low insertion withdrawal force
- Guides for automated operation
- The larger contact area and two-point contact design ensures high contact reliability

Part Number (Details)

IC107 - 26 03 - * * MF - G

Series No.


No. of Contact Pins

Row Space (03 = 300MIL)


Please specify the number of contacts if a depopulated version is required

MF = Flanged
 Unmarked = Not Flanged


Contact Plating Specification



Outline Socket Dimensions

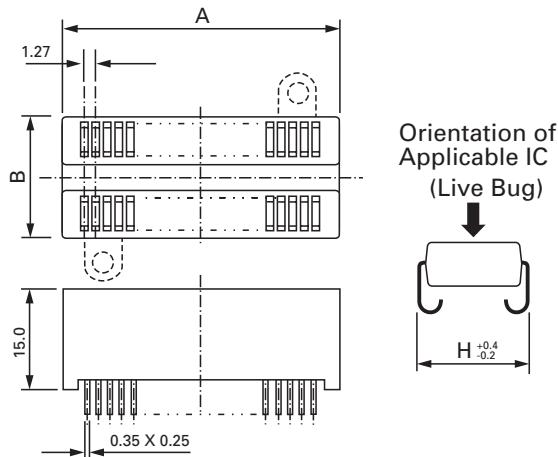

Recommended PC Board Layout

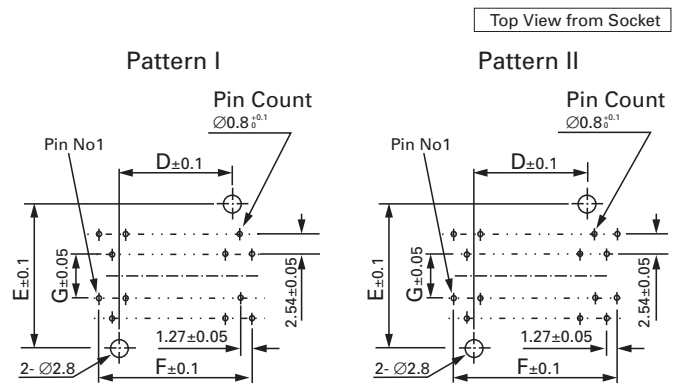

¹⁾ Flange not available

Part Number	Row Spacing	Pin Count	Socket Dim.		PCB Dimensions						IC Dim.
			A	B	D	E	F	G	Pattern	H	
IC107-2403-**xx-G	300	24	18.8	15.6	11.0	21.6	1.27 x 11 = 13.97	6.86	I	8.4	
IC107-2603-20xx-G	300	20	20.1	15.6	13.0	21.6	1.27 x 12 = 15.24	6.86	II	8.4	
IC107-2603-**xx-G	300	26	20.1	15.6	13.0	21.6	1.27 x 12 = 15.24	6.86	II	8.4	
IC107-2803-24xx-G	300	24	21.4	15.6	14.2	21.6	1.27 x 13 = 16.51	6.86	I	8.4	
IC107-2803-**xx-G	300	28	21.4	15.6	14.2	21.6	1.27 x 13 = 16.51	6.86	I	8.4	
IC107-3203-**xx-G	300	32	24.0	15.6	14.2	21.6	1.27 x 15 = 19.05	6.86	I	8.4	
¹⁾ IC107-26035-20-G	350	20	20.1	16.8	13.0	22.8	1.27 x 12 = 15.24	8.13	II	9.7	
¹⁾ IC107-26035-**-G	350	26	20.1	16.8	13.0	22.8	1.27 x 12 = 15.24	8.13	II	9.7	
IC107-2804-24xx-G	400	24	21.4	18.0	14.2	24.1	1.27 x 13 = 16.51	9.4	I	10.9	
IC107-2804-**xx-G	400	28	21.4	18.0	14.2	24.1	1.27 x 13 = 16.51	9.4	I	10.9	
IC107-3204-**xx-G	400	32	24.0	18.0	14.2	24.1	1.27 x 15 = 19.05	9.4	I	10.9	
IC107-3604-**xx-G	400	36	26.5	18.0	15.5	24.1	1.27 x 17 = 24.13	9.4	I	10.9	
IC107-4004-**xx-G	400	40	29.0	18.0	20.0	24.1	1.27 x 19 = 24.13	9.4	I	10.9	
IC107-4204-**xx-G	400	42	30.3	18.0	20.0	24.1	1.27 x 20 = 25.40	9.4	II	10.9	
IC107-4404-**xx-G	400	44	31.6	18.0	21.6	24.1	1.27 x 21 = 26.67	9.4	I	10.9	