

A

B

C

D

E

F

A

B

C

D

E

F

1

2

3

4

5

6

7



8

| No. | Rev. | Revision Record | Name | Date. |
|-----|------|---------------------|------|------------|
| △ | V01 | Use ST-121C07B size | Bill | 2021.01.21 |
| | | | | |
| | | | | |

Front view

Side view


Back view

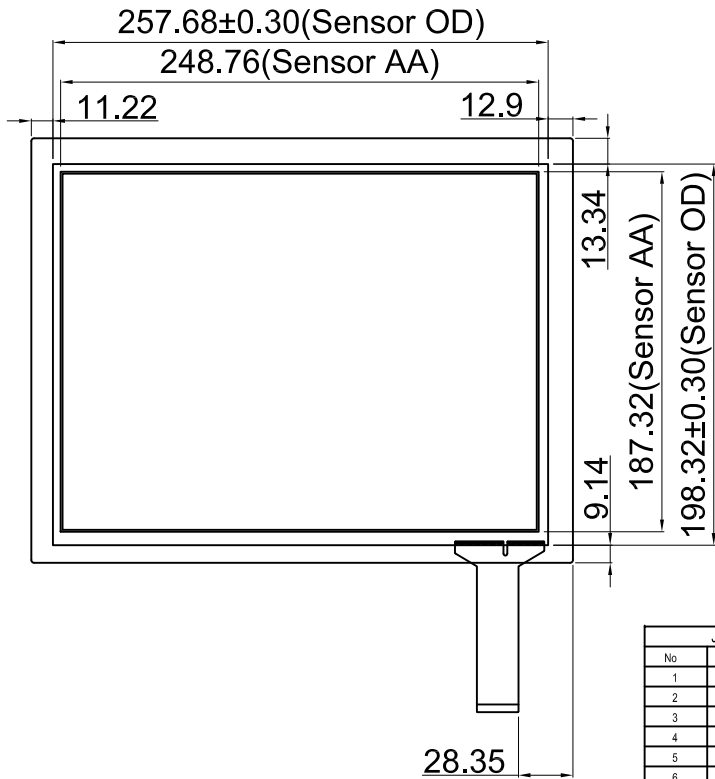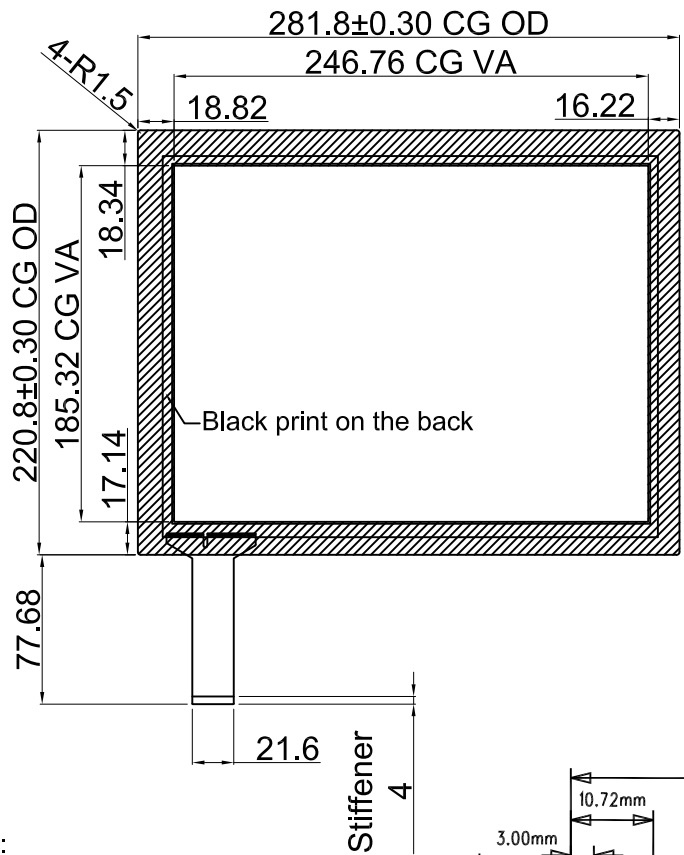

| JP2 | |
|-----|------------------|
| No | Pin define |
| 1 | GPIO1 |
| 2 | GPIO3 |
| 3 | D+ |
| 4 | D- |
| 5 | VDD(3.3&5V) |
| 6 | GND |
| 7 | INT(3.3V) |
| 8 | SDA(3.3V) |
| 9 | SCL(3.3V) |
| 10 | WAKE/RST(3.3&5V) |

Technical Spec:

- COVER LENS : Soda lime
- Chemical strength glass,surface hardness $\geq 7H$
- Transmittance $\geq 86\%$
- IC :EETI 80H7146(TX27*RX36), 10 points touch.
- Interface : USB/I2C
- Common tolerance $\pm 0.3mm$
- Follow RoHS standard
- Operating Temperature:-20°C~+70°C
Storage Temperature:-30°C~+80°C

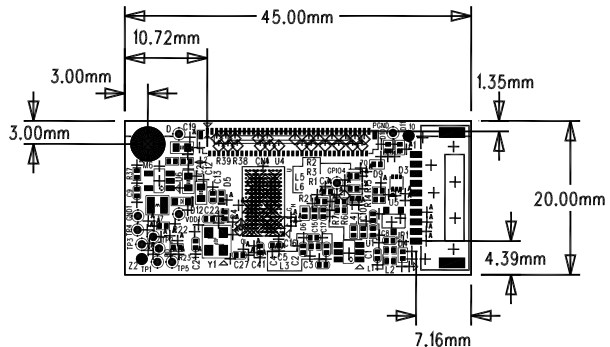

| Sense Touch Technology, Inc | | | | | |
|-----------------------------|-------|--------------|------------|------|------------|
| Rev | V01 | Model No. | ST-121C07C | | |
| Sheet | 1 / 1 | Customer P/N | | | |
| Unit | mm | Designed | Bill | Date | 2021.01.21 |
| Scale | 1 : 1 | Checked | | Date | |
| Viewpoint | | Approved | | Date | |

1

2

3

4

5

6

7

8