

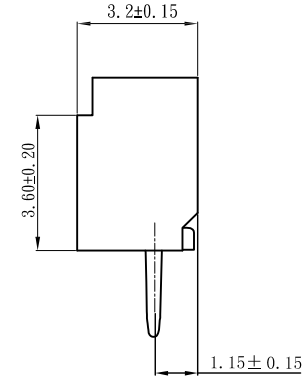
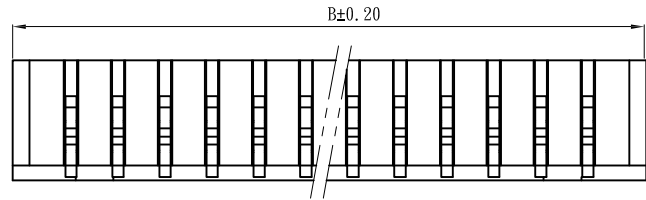
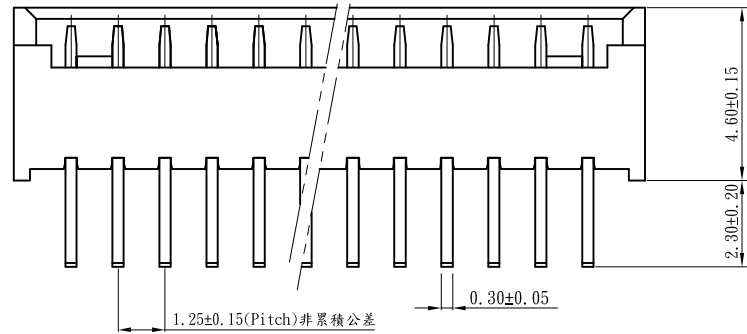



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2021.01.29	钟建虾
B	$\triangle B$	依業務要求增加電鍍碼	2021.05.26	钟建虾

**NOTES:**

- MATERIAL:**  
1-1.INSULATOR MATERIAL: PA46 UL94V-0  
1-2.CONTACT MATERIAL: PHOSPHOR BRONZE
- PLATING** SEE PART NUMBER
- RATING**  
3-1. OPERATING TEMPERATURE: -25°C~85°C  
3-2. OPERATING VOLTAGE: 200V AC/DC  
3-3. CURRENT RATING: 1.0 AMPS  
3-4. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/Minute;  
3-5. INSULATION RESISTANCE:1000M $\Omega$  Min;  
3-6. CONTACT RESISTANCE:0.03 $\Omega$  Max;

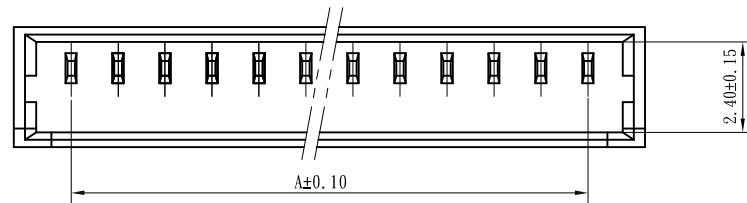

No of PIN/Row	Dimensions	
	A	B
2	1.25	4.25
3	2.5	5.5
4	3.75	6.75
5	5	8
6	6.25	9.25
7	7.5	10.5
8	8.75	11.75
9	10	13
10	11.25	14.25
11	12.5	15.5
12	13.75	16.75
13	15	18
14	16.25	19.25
15	17.5	20.5
16	18.75	21.75

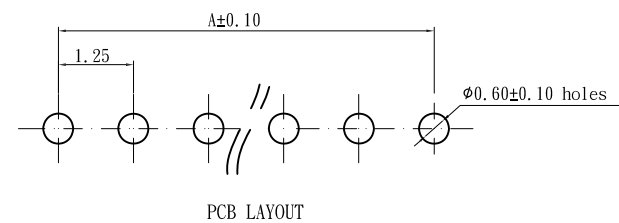

### Ordering Information

G WDA105-XX XX A 001 F X S X -06

No. of Pins per Row 02~16

Standard Plating  
01=Tin  
02=Gold Flash  
05=Gold Flash/Tin  
 $\triangle B$  14=Gold 30u"/Gold Flash

Color  
1=Black  
2=White  
4=Creamy-White  
F=Transparent

Standard Packing  
B=Tray  
Selective Packing  
C=Tube  
D=Tape&Reel  
N=PE Bag

 Website: www.greenconn.com E-mail: sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED: 钟建虾	DATE: 2021.05.26	DWG. NO.	TITLE. 1.25 WTB CONN.SINGLE ROW VERTICAL
		X.* $\pm$ 3.0'	X. $\pm$ /	CHECKED:	DATE:	GWDA105-CA1FS	
	PAGE. 1/1	.X' $\pm$ 2.0'	.X $\pm$ 0.25	APPROVED:	DATE:	PART NO.	
		.XX' $\pm$ 1.5'	.XX $\pm$ 0.20			GWDA105-XXXXA001FXSX-06	
REV. B	UNIT. mm	SCALE. 1:1					