

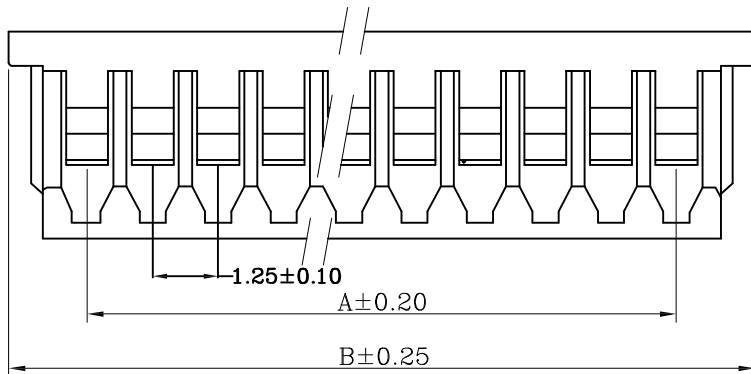


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2021.02.20	钟建虾

NOTES:

CURRENT RATING:1A AC/DC.
 VOLTAGE RATING:125V AC/DC
 TEMPERATURE RANGE:-40°C~+105°C.
 CONTACT RESISTANCE:20MΩ Max.
 INSULATION RESISTANCE:100MΩ Min.
 WITHSTANDING VOLTAGE:500V AC/MINUTE.
 MATERIAL:NYLON 66.UL94V-0.

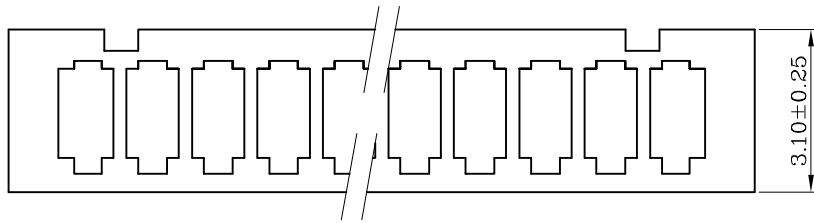

No of Pin/Row	Dimensions	
	A	B
02	1.25	4.25
03	2.50	5.50
04	3.75	6.75
05	5.00	8.00
06	6.25	9.25
07	7.50	10.50
08	8.75	11.75
09	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50
16	18.75	21.75

GHD321 - XX

A

X


No. of Pin/Row
02 ~ 16

Material/Color
M=Nylon66/White



Website: www.greenconn.com
 E-mail: sales@greenconn.com

3RD.ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.*±/	X.±/
.X*±/	.X±0.30
.XX*±/	.XX±0.25
.XXX*±/	.XXX±0.15

DESIGNED: 钟建虾

DATE: 2021.02.20

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GHD321-HA

PART NO.

GHD321-XXAX

TITLE.

1.25mm pitch housing

REV.	UNIT.	SCALE.
A	mm	1:1