
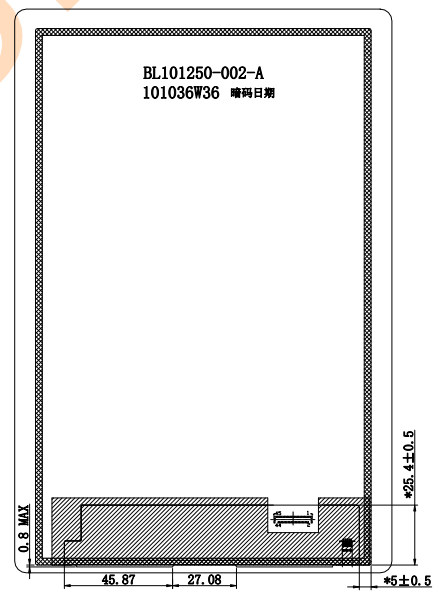
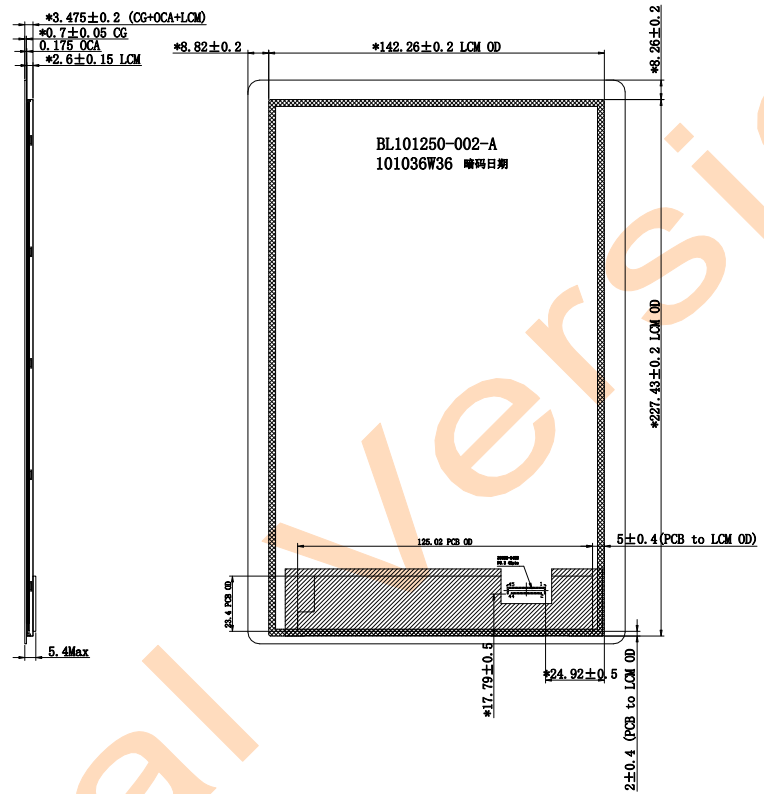


RoHS

NO.	CONTENT	DRAWN	DATE
	首次发行	LXY	20240224

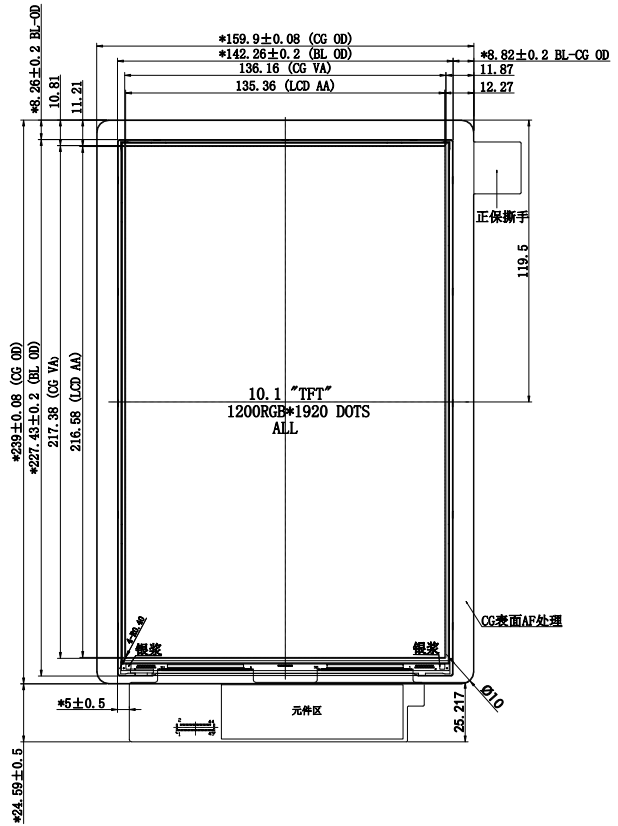


FPC弯折示意图  
主屏fpc展开出货

PIN ASSIGNMENT	
1	GND
2	GND
3	GND
4	OTP_POWER
5	VCC
6	VBAT_SYS
7	VBAT_SYS
8	FB4-
9	FB3-
10	FB2-
11	FB1-
12	NC
13	LED+
14	LED+
15	NC
16	GND
17	MIPI_DATA0_P
18	MIPI_DATA0_N
19	GND
20	MIPI_DATA1_P
21	MIPI_DATA1_N
22	GND
23	MIPI_CLK_P
24	MIPI_CLK_P
25	GND
26	MIPI_DATA2_P
27	MIPI_DATA2_N
28	GND
29	MIPI_DATA3_P
30	MIPI_DATA3_N
31	GND
32	LCD_RST
33	ID0
34	ID1
35	GND
36	LED PWM OUT
37	NC
38	NC
39	I2C_SCL_TP
40	I2C_SDA_TP
41	TP_INT
42	TP_RST
43	NC
44	DVDD_TP
45	GND

Notes:

1. Display Mode: Normally Black
2. Viewing Angle: ALL
3. LCD Driver IC: HX83102-E+HX83102-E
4. Operating Temp: -10°C ~ +60°C
5. Storage Temp: -20°C ~ +70°C
6. \*: Critical Dimension, ( ): Reference Dimension
7. Undefined Tolerance: ±0.2
8. Requirements on Environmental Protection: RoHS 2.0

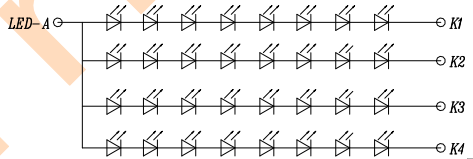

IF=80MA, VF=24±2.4V  
Luminance: 290cd/m²

 <b>深圳市福瑞达显示技术有限公司</b> Shenzhen Frida LCD Co., Ltd					Page	1/1
					DRAWING	LXY
TITLE.	LCM+CG	REV.	UNIT	SIZE		CHECK
MODEL.	P24022305	V0	mm	A4		APPROVE