



Ver.	modify NO.	Details	Area	P.I.C	Date



TOP VIEW

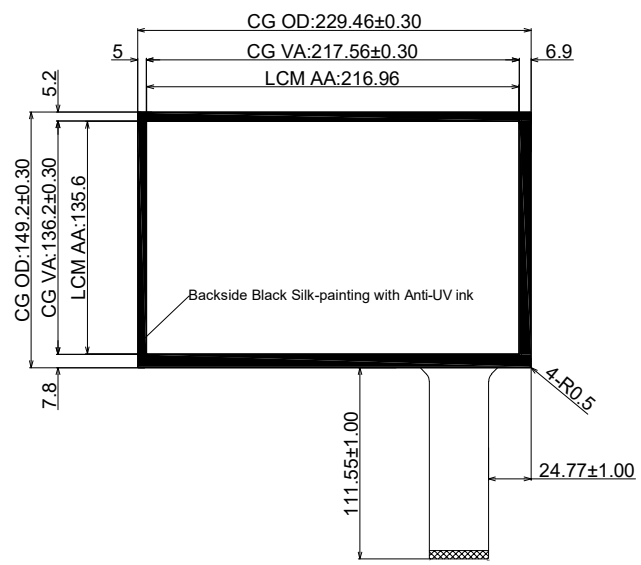

SIDE VIEW

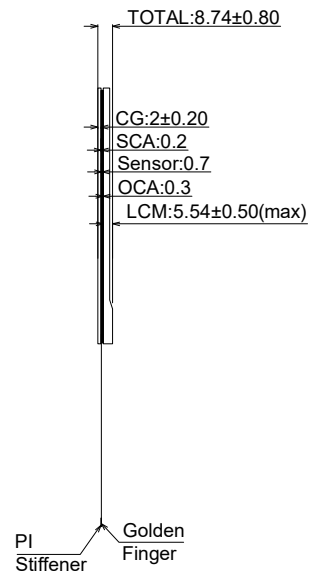

BACK VIEW

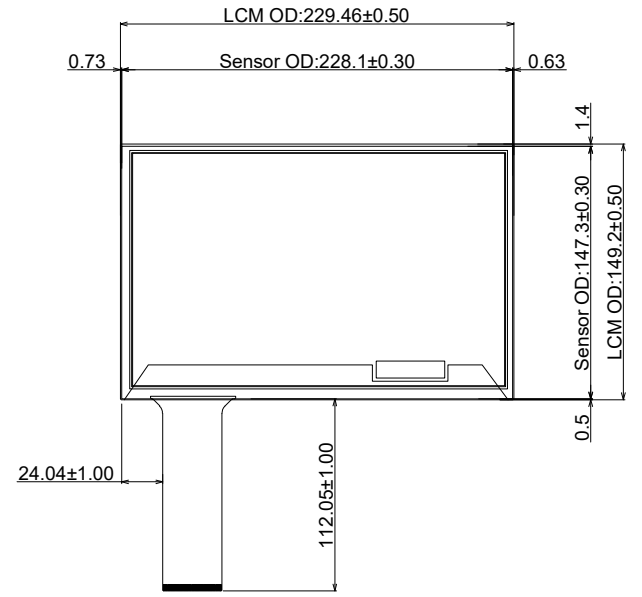

USB PIN ASSIGNMENT

1	VDD/5V
2	D-
3	D+
4	GND

CONTROLLER SC 2:1

- Technical Datasheet:
- Structure: TP+LCM Optical Bonding
 - Cover Glass: 2mm Tempered Glass
 - LCD: G101EVN01.0
 - TP Controller: BTP-TPM-CTR-ILI-101B-SN16
 - TP Controller IC: ILI2511P.C2.P1.V1
 - Surface Hardness: ≥6H
 - Light Transmittance: ≥85%
 - Working Temperature: -20°C~+60°C, ≤85%RH;
 - Storage Temperature: -30°C~+70°C, ≤85%RH;
 - Unmarked Tolerance: ±0.5mm
 - All materials used conform to RoHS standards

Designed by:	Curry.Wang
Checked by:	Jimmy.Lu
Approved by:	Cale.Chen
Workmanship:	Yong.Xin
Standardization:	Link.Chen
Released by:	Rocky.Liu

Part No.		BTP-TPM-G1-10.1-ILI-SN16			
Product Name:		Drawing No.	PM101241031SN16		
10.1 inch Touch Display (TP+LCM Optical Bonding)		Project Code.	PM101SN16		
Business Unit:		Period Mark	View Angle	Ratio	
SNT-BTP		A		1:1	
BOM Code	2.03.101.01.0116	Page 1	Total 1 Page		
Product Series	BTP-TPM	SINOTECTRONICS Interactivity Changes the World			