







REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2021.02.18	钟建虾
B		更新尺寸参数,增加PIN孔缩图	2022.11.25	张汝楼

Specifications
 Current Rating: 9A AC DC
 Voltage Rating: 600V AC DC
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 10MΩ Max.
 Withstanding Voltage: 1500V AC/minute
 Temperature Range: -40°C to +105°C
 Material:
 Housing : Nylon-66, UL 94V-2
 Matching Terminal: --
 All materials must meet Greenconn hazardous substances control standards.






No.of Pin	Dimensions	
	A	B
2X01P		5.50
2X02P	4.20	9.70
2X03P	8.40	13.90
2X04P	12.60	18.10
2X05P	16.80	22.30
2X06P	21.00	26.50
2X07P	25.20	30.70
2X08P	29.40	34.90
2X09P	33.60	39.10
2X10P	37.80	43.30
2X11P	42.00	47.50
2X12P	46.20	51.70




3方3圆








4方4圆



2方4圆



3方5圆

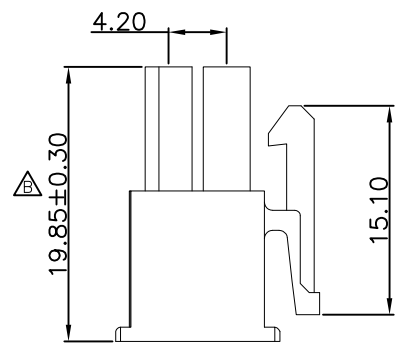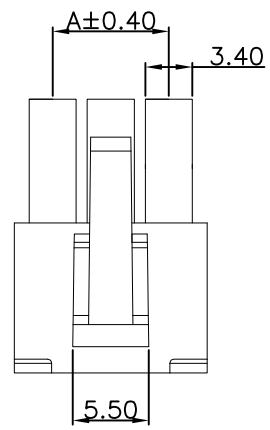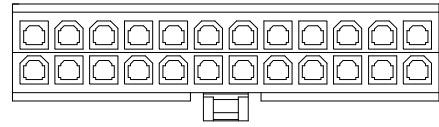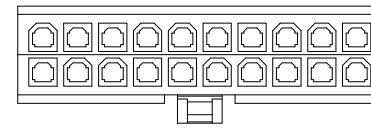

GHR232 - XX A XX
 No. of Pin/Row 01 ~ 12
 Material/Color NF=Nylon66/Transparent

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.°±/	X.±/
.X°±/	.X±0.30
.XX°±/	.XX±0.25
.XXX°±/	.XXX±0.15

DESIGNED: 张汝楼
 CHECKED:
 APPROVED:

DATE: 2022.11.25
 DATE:
 DATE:

DWG. NO. GHR232-HA
 PART NO. GHR232-XXAXX

TITLE. 4.2mm pitch housing