

HF115F-L 2 pole

MINIATURE HIGH POWER LATCHING RELAY



File No.:E134517



File No.:116934



File No.:CQC17002176310



Features

- Latching relay
- Low height: 15.7 mm
- 10A switching capability
- 5kV dielectric strength (between coil and contacts)
- Creepage distance: 11mm-NO/10mm-CO version
- Meeting VDE 0700, 0631 reinforce insulation
- Product in accordance to IEC 60335-1 available
- UL insulation system: Class F

CONTACT DATA

Contact arrangement	2A, 2C
Contact resistance ¹⁾	100mΩ max.(at 1A 6VDC)
Contact material	AgSnO ₂
Contact rating(Res. load)	8A 250VAC
Typ. applicable load	Lamp: Tungsten 3A 277VAC Standard ballast: 3A 277VAC
Max. switching voltage	440VAC / 300VDC
Max. switching current	10A
Max. switching power	2000VA
Mechanical endurance	2 x 10 ⁶ OPS
Electrical endurance	2H type: 5 x 10 ⁴ OPS (8A 250VAC, General use, at 85°C, 5s on 5s off) 2Z type: 1 x 10 ⁴ OPS (8A 250VAC, General use, at 85°C, 5s on 5s off)

Notes: 1) The data shown above are initial values.

CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
	Between contact sets	2500VAC 1min
Surge voltage (between coil & contacts)	10kV (1.2 / 50μs)	
Set time (at rated. volt.)	10ms max.	
Reset time (at rated. volt.)	10ms max.	
Shock resistance *	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance *	10Hz to 150Hz 10g/5g	
Humidity	5% to 85% RH	
Ambient temperature	-40°C to 85°C	
Termination	PCB	
Unit weight	Approx. 13.5g	
Construction	Plastic sealed, Flux proofed	

Notes: 1) The data shown above are initial values.
2) * Index is not in relay length direction.

COIL

Coil power	1 coil latching: Approx. 400mW
	2 coils latching: Approx. 600mW

COIL DATA

at 23°C

1 coil latching

Nominal Voltage VDC	Set Voltage VDC max.1)	Pulse Width (ms)		Reset Voltage VDC max.1)	Max. Voltage VDC	Coil Resistance Ω
		Typical	Min.			
5	3.5	≥50	30	3.5	6	62x (1±10%)
6	4.2	≥50	30	4.2	7.2	90x (1±10%)
9	6.3	≥50	30	6.3	10.8	202x (1±10%)
12	8.4	≥50	30	8.4	14.4	360x (1±10%)
24	16.8	≥50	30	16.8	28.8	1440x (1±10%)

2 coils latching

Nominal Voltage VDC	Set Voltage VDC max.1)	Pulse Width (ms)		Reset Voltage VDC max.1)	Max. Voltage VDC	Coil Resistance Ω
		Typical	Min.			
5	3.5	≥50	30	3.5	7.5	42x (1±10%)
6	4.2	≥50	30	4.2	9	55x (1±10%)
9	6.3	≥50	30	6.3	13.5	135x (1±10%)
12	8.4	≥50	30	8.4	18	240x (1±10%)
24	16.8	≥50	30	16.8	36	886x (1±10%)

Notes: 1) The data shown above are initial values.

2) *Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

SAFETY APPROVAL RATINGS

UL/CUL	10A/8A 250/277VAC General use at 85°C 1/2 HP 240VAC at 40°C Standard ballast 3A 277VAC at 40°C Tungsten Lamp 3A 277VAC at 40°C
VDE	8A 250VAC at 85°C

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2023 Rev. 2.00

ORDERING INFORMATION


Type	HF115F-L / 12 -2Z S 4 L1 T F (XXX)								
Coil voltage	5, 6, 9, 12, 24VDC								
Contact arrangement	2H: 2 Form A 2Z: 2 Form C								
Construction ¹⁾²⁾	S: Plastic sealed Nil: Flux proofed								
Version	4: 5.0mm 2 pole 8A								
Sort	L1: 1 coil latching L2: 2 coils latching								
Contact material	T: AgSnO ₂								
Insulation standard	F: Class F								
Special code ³⁾	XXX: Customer special requirement				Nil: Standard				

- Notes:**
- 1) We recommend flux proofed types for a clean environment (free from contaminations like H₂S, SO₂, NO₂, dust, etc.). We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H₂S, SO₂, NO₂, dust, etc).
 - 2) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
 - 3) The customer special requirement express as special code after evaluating by Hongfa. e.g.(335) stands for product in accordance to IEC 60335-1 (GWT).
 - 4) Two packing methods available: plastic tray package, tube package,Standard tube packing length is 616mm. Any special requirement needed, please contact us for more details.
 - 5) For products that should meet the explosion-proof requirements of "IEC 60079 series",please note [Ex] after the specification while placing orders.Not all products have explosion-proof certification,so please contact us if necessary, in order to select the suitable products.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Outline Dimensions

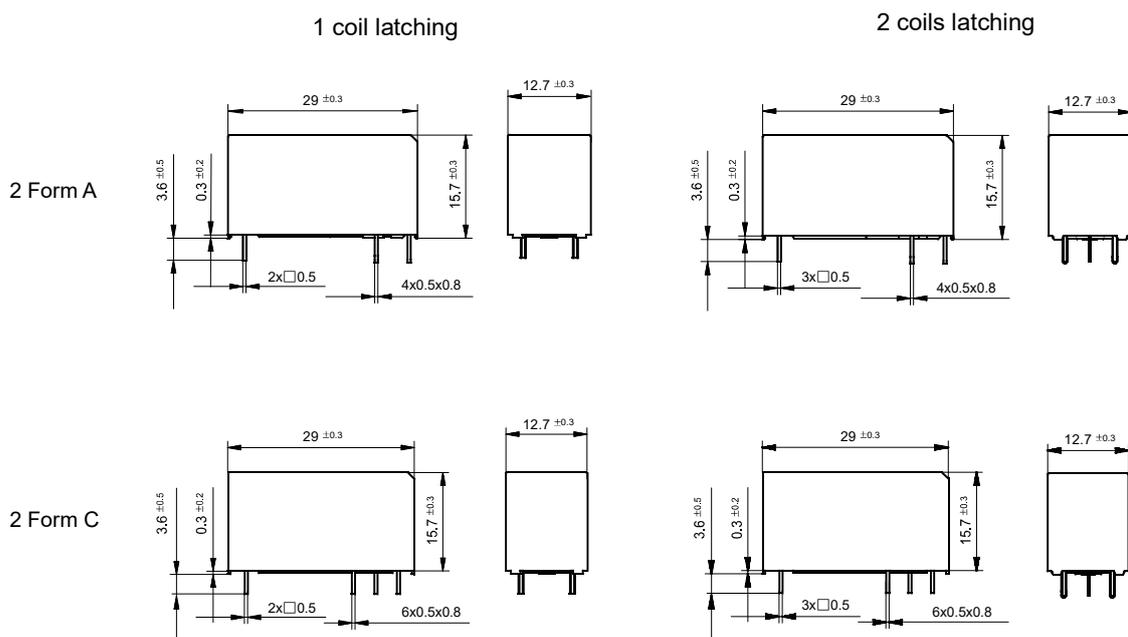


Wiring Diagram
(Bottom view)


1 coil: Two groups 8A(Set Status)

2 coils: Two groups 8A(Set Status)

2 Form A

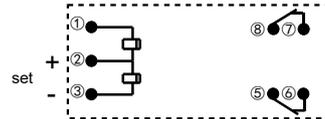


2 Form C

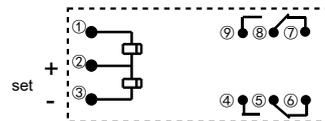



1 coil: Two groups 8A(Reset Status)

2 coils: Two groups 8A(Reset Status)

2 Form A

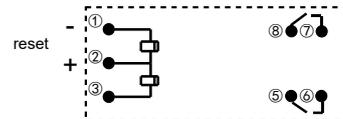

2 Form C

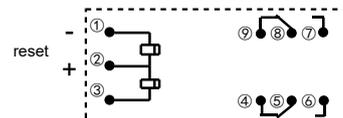
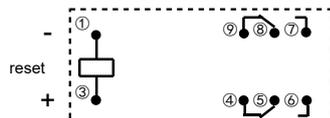


PCB Layout
(Bottom view)


1 coil latching

2 coils latching

2 Form A

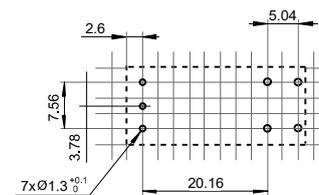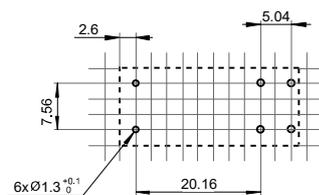

PCB Layout
(Bottom view)

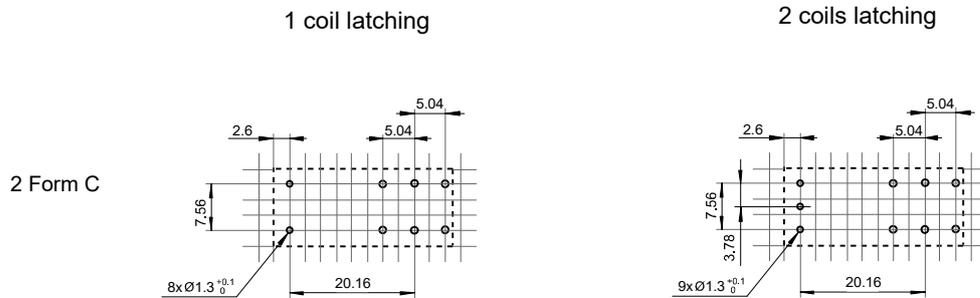

- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
 2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.
 3) The width of the gridding is 2.52mm.

Notice

1. Relay is on the "reset" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
2. In order to maintain "set" or "reset" status, energized voltage to coil should reach the rated voltage. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
3. Keep the product away from strong magnetic field during transportation, storage and application, to avoid change of set/reset voltage.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.