




Power over Ethernet Solutions

A range of power solutions for PoE, PoE+ and PoE++
including TVS/ESD/OVP devices for robust RJ45 protection

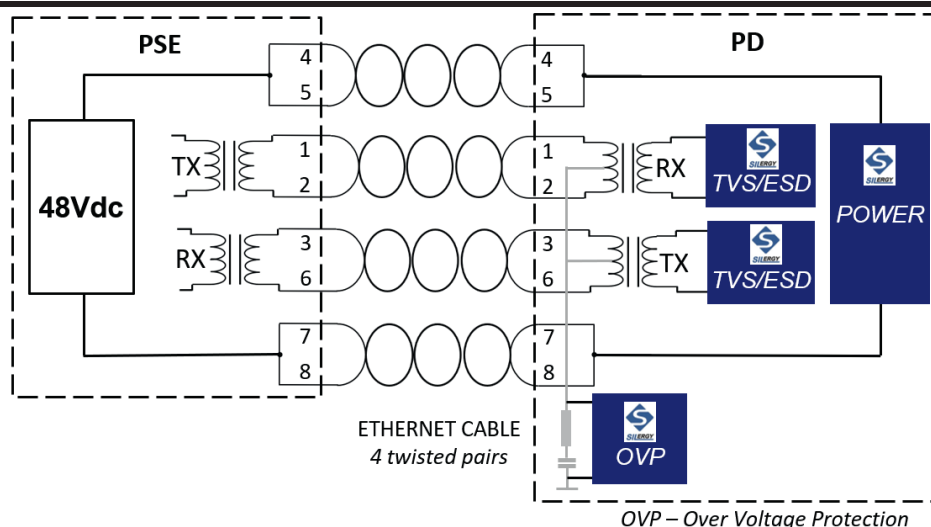

Part Number	Standard	PD Input Power (W)	FUNCTION	HOTSWAP MOSFET (V)	PACKAGE (mm)	Features
SY23211AQEC	PoE	13	IEEE802.3af PD INTERFACE and DCDC CONVERTOR (150V/0.14Q)	100 (0.4Q)	QFN32 (5*5)	PSR, QR
SY23215QYC	PoE+	25.5	IEEE802.3at/af PD INTERFACE and DCDC CONTROLLER (ext FET)	95 (0.4Q)	QFN20 (4*4)	PSR, QR
SY28902FBC	PoE++	71.3	IEEE802.3bt/at/af PD INTERFACE CONTROLLER	External	MSOP10 (3.0*4.9)	5-Event 100V ABSMAX
SY23214AFAC	PoE++	71.3	FLYBACK CONTROLLER	-	SO8 (3.9*6.0)	PSR, QR
SY23422ABC	PoE++	71.3	SYNCHRONOUS RECTIFIER CONTROLLER	-	SOT23-6 (2.8*2.9)	5V to 15V Vout

Part Number	Standard	FUNCTION	C (pF)	PACKAGE (mm)	Features
SYS11UxxAMC	IEC61000-4-5 (8/20us) 6A-25A	1-ch TVS/ESD	0.6	SOD323 (1.7*1.3)	3V/8V/5V/12V/18V/24V
SYT0xL0xABC	IEC61000-4-5 (8/20us) 20A	4-ch TVS/ESD	3.5	SOT23-6 (2.9*2.8)	06L05 -> 5V 01L03 -> 3.3V
SYS3500AHJC	IEC61000-4-5 (8/20us) 400A and (5/320us) 150A	OVP for RC Termination (Vs=400V)	150	SMB (5.3*3.5)	Bi-directional
SYS4200AHJC	IEC61000-4-5 (8/20us) 400A and (5/320us) 150A	OVP for RC Termination (Vs=520V)	35	SMB (5.3*3.5)	Bi-directional

Highly Efficient - Space Saving - Easy Design - Robust Performance
Silergy's PoE PD Solutions simplify the Art of Power Supply Design

Symmetron

www.symmetron.ru

МОСКВА
Ленинградское шоссе, д. 69, к. 1
Тел.: +7 495 961-20-20
moscow@symmetron.ru

САНКТ-ПЕТЕРБУРГ
ул. Таллинская, д. 7
Тел.: +7 812 449-40-00
spb@symmetron.ru

НОВОСИБИРСК
ул. Блюхера, д. 716
Тел.: +7 383 361-34-24
sibir@symmetron.ru

МИНСК
ул. В. Хоружей, д. 1а, оф. 403
Тел.: +375 17 336-06-06
minsk@symmetron.ru