


1 2 3 4 5 6 7 8 9

F  
E  
D  
C  
B  
A

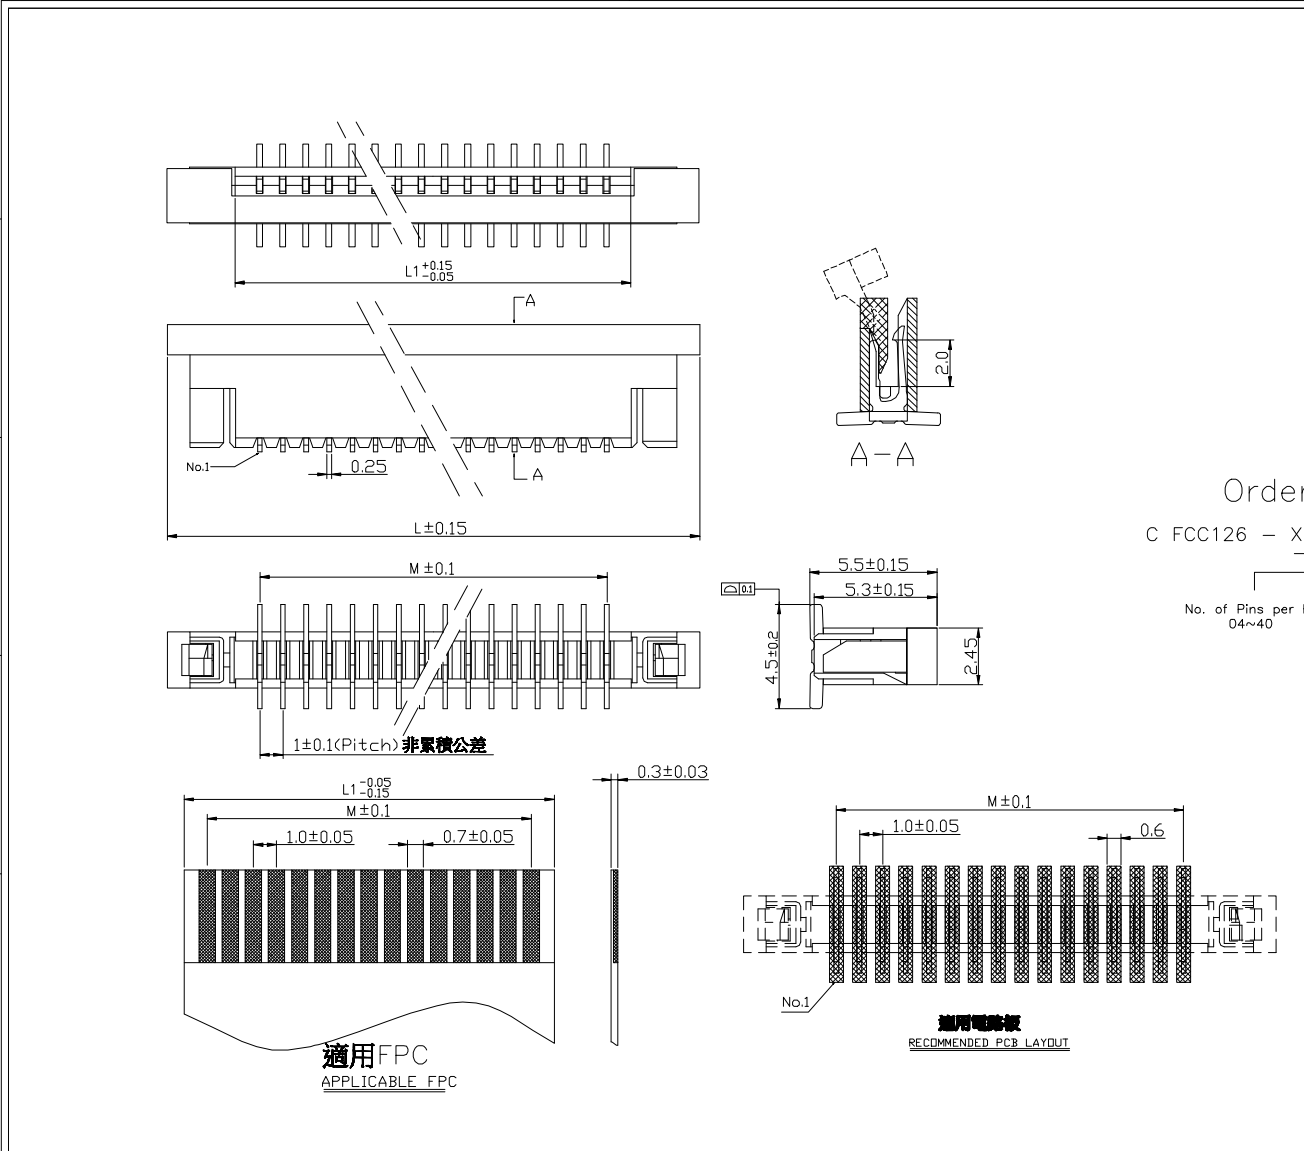

**Specifications**  
 Insulation Resistance: 500MΩ Min.  
 Dielectric Withstanding: 500V AC  
 Contact Resistance: 0.03Ω Max.  
 Operating Temperature: -25~+85°  
 Voltage Rating: 50V AC/DC

**Materials**  
 Insulation Material: PA46 (UL94V-0) Nature  
 Contact Material: Phosphor Bronze Tin Planted  
 Actuator: PPS (UL94V-0) Black/Brown  
 All materials must meet Greennonn requirement for environment protection

**Ordering Information**

C FCC126 - XX XX A 001 F X A X

No. of Pins per Row 04~40

Standard Plating  
 01=Tin  
 Selective Plating  
 22=Matte Tin

Color  
 2=White  
 E=Beige

Standard Packing  
 C=Tube  
 Selective Packing  
 A=Box  
 N=PE Bag

No. of PIN/ROW	Dimension Information			No. of PIN/ROW	Dimension Information		
	M	L1	L		M	L1	L
04	3.00	5.10	11.0	23	22.00	24.10	30.0
05	4.00	6.10	12.0	24	23.00	25.10	31.0
06	5.00	7.10	13.0	25	24.00	26.10	32.0
07	6.00	8.10	14.0	26	25.00	27.10	33.0
08	7.00	9.10	15.0	27	26.00	28.10	34.0
09	8.00	10.10	16.0	28	27.00	29.10	35.0
10	9.00	11.10	17.0	29	28.00	30.10	36.0
11	10.00	12.10	18.0	30	29.00	31.10	37.0
12	11.00	13.10	19.0	31	30.00	32.10	38.0
13	12.00	14.10	20.0	32	31.00	33.10	39.0
14	13.00	15.10	21.0	33	32.00	34.10	40.0
15	14.00	16.10	22.0	34	33.00	35.10	41.0
16	15.00	17.10	23.0	35	34.00	36.10	42.0
17	16.00	18.10	24.0	36	35.00	37.10	43.0
18	17.00	19.10	25.0	37	36.00	38.10	44.0
19	18.00	20.10	26.0	38	37.00	39.10	45.0
20	19.00	21.10	27.0	39	38.00	40.10	46.0
21	20.00	22.10	28.0	40	39.00	41.10	47.0
22	21.00	23.10	29.0				

<b>格稜股份有限公司</b> <b>Greennonn Corporation</b>				GENERAL TOLERANCE		DESIGN:	DATE:	DWG. NO. CFCC126-CA1FA	TITLE. 1.0 FCP
				X: ±5.0'	X: ±0.30	CHECKED:	DATE:		
REV. 02	UNIT. mm	SCALE. 4:1	PAGE. 1/1	.X' ±3.0'	.X ±0.25	AUDITED:	DATE:	PART NO. CFCC126-XXXXA001FXAX	
				.XX' ±2.0'	.XX ±0.20				
				.XXX' ±1.0'	.XXX ±0.10				

1 2 3 4 5 6 7 8 9