

1
RoHS Compliant

2

3



4

5

6

7




8




MATERIAL
Contacts:Phosphor Bronze,Tin-plated

Main Specifications
Poles:01P
Contact Resistance:≤20mΩ
Rated Voltage:250V AC DC
Rated Current:2.0A AC DC
Withstanding Voltage:1500VAC/minute
Temperature Range:-45℃~+125℃

Order Information
L-KLS2-L49B
Series No.
RoHS

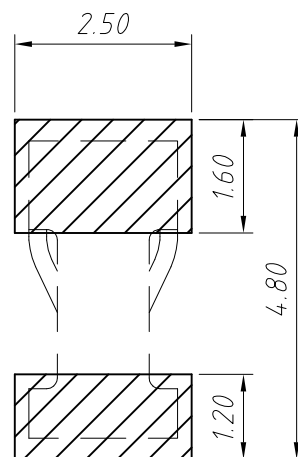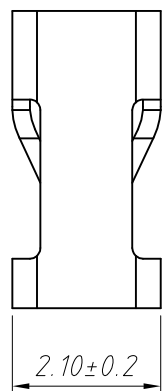

Board Layout

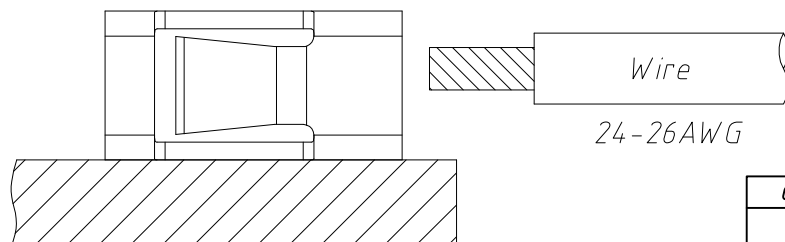

Assembly Layout

Wire
24-26AWG

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ±0.15		X. ±5°		UNITS	mm	Naked Terminal SMT for led lighting,24 ~26AWG
.X ±0.03		.X ±3°		SHEET SIZE	A4	
.XX ±0.05		.XX ±2°			KLS P/N:	L-KLS2-L49B
Draw by:	Jenny	Date:	2018-03-10	NingBo KLS ELECTRONIC CO.,L TD.		
Check by:		Date:	2018-03-10			
SCALE		SHEET	1 OF 1			