



Ver.	modify NO.	Details	Area	P.I.C	Date


Front View

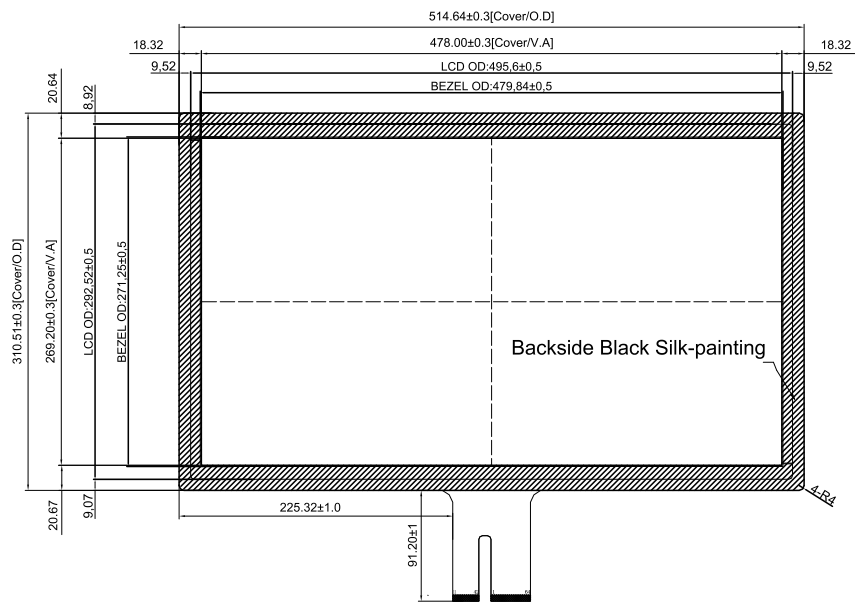

Side View


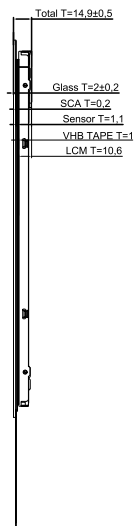


Back View

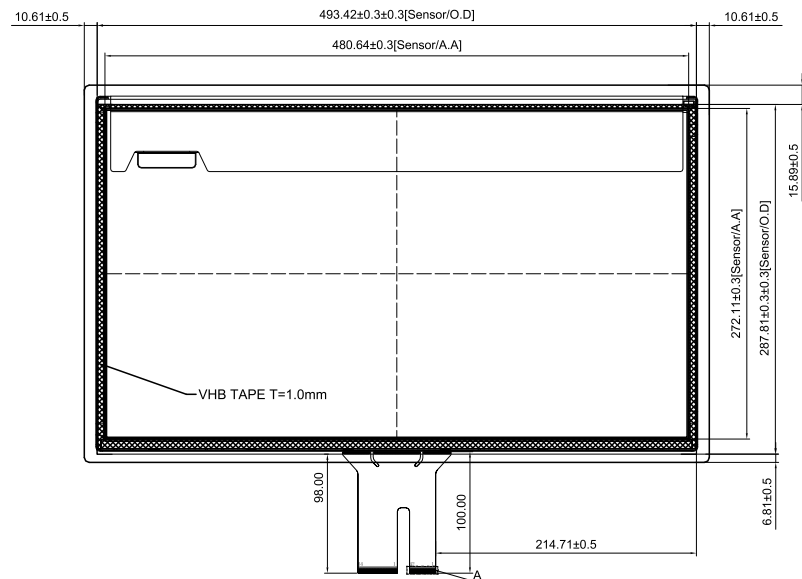

Technical Datasheet:

1. Structure: TP+LCM Tape Bonding
2. Cover Glass: 2mm Tempered glass,
3. LCD: DV215FHM-NN0
4. TP Controller: BTP-TMS-CTR-ETI-215B-R17
Interface: USB/IIC/RS232
5. TP Controller IC: EET181H84(TX*RX=34*60)
6. Surface Hardness: ≥6H
7. Light Transmittance: ≥85%
8. Operating Temperature: -20℃~+70℃, ≤85%RH;
Operating environment: Outdoor, water proof
9. Storage Temperature: -20℃~+80℃, ≤85%RH
10. Unmarked Tolerance: ±0.5mm
11. All materials used conform to RoHS standards



Part No.	BTP-TMS-21.5-DV2-ETI-R17		
Product Name: 21.5inch Touch Display (TP+LCM Tape Bonding)	Drawing No.	MS215230428R17	
	Project Code.	MS215R17	
Business Unit: SNT-BTP	Period Mark	View Angle	Ratio
	A		1:1
Workmanship:	Yong.Xin	BOM Code	2.22.215.24.0117
Standardization:	Link.Chen	Page 1	Total 1 Page
Released by:	Rocky.Liu	Product Series	BTP-MS
		恩诺泰科电子(苏州)有限公司 SINOTECTRONICS INC.	