

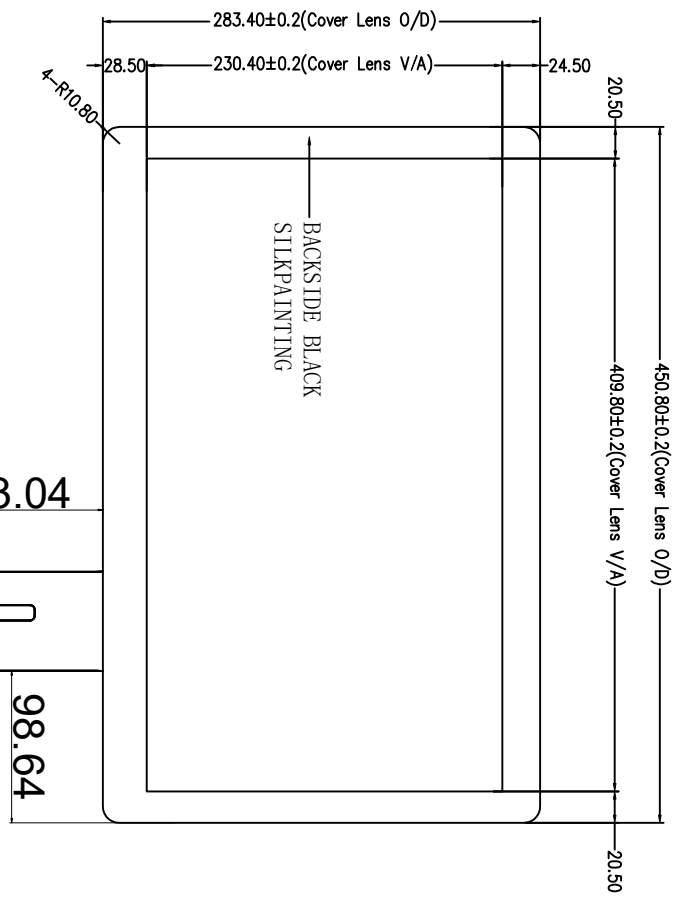


标记 (mark)	修改内容 (revised contents)	签名 (signature)	日期 (Date)
<1>			
<2>			
<3>			
<4>			
<5>			

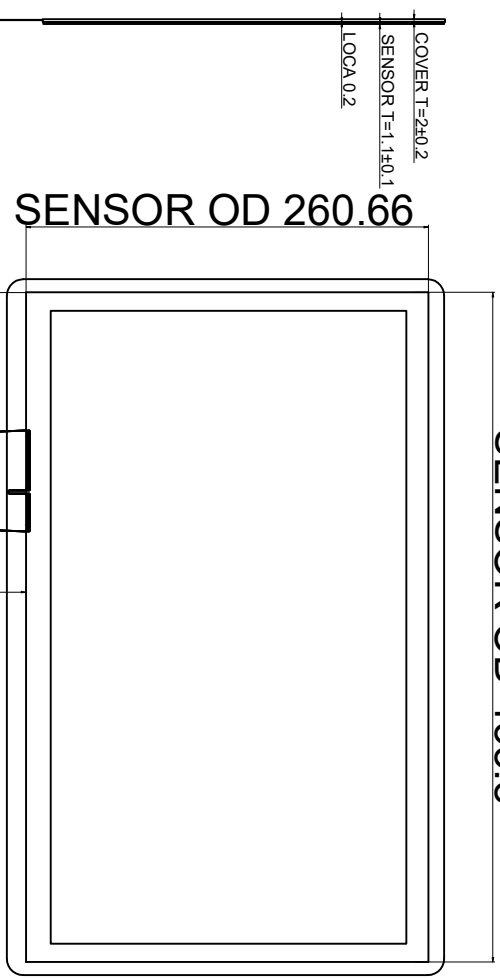

RX*TX: 56*32



For USB Connector (19)	
1	ECND
2	VCC (5V)
3	GND
4	D+
5	D-

SINOTELECTRONICS INC.

TITLE: SNT-ITO-TPB-18.5-IL1

产品编号	客户编号	View: 投影方式
设计	Unit: mm	⊕
Checked By:	Date:	☐
审核	日期	1:1
Approved By:		
批准		

- Technical parameters:
- FOG Structure: G;
 - FOG Type: COF, IC controller: ILI2510MP.C3.P3.V1; Working voltage: USB(5V);
 - Light transmittance: $\geq 80\%$;
 - Working environment: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$, $\leq 85\% \text{RH}$;
 - Storage environment: $-10^{\circ}\text{C} \sim +65^{\circ}\text{C}$, $\leq 85\% \text{RH}$;
 - Tolerance of those parts without any notes: $+ / - 0.5 \text{ mm}$;
 - Products comply with RoHS standard.

Touch Panel Structure

TOP

- Cover 2mm
- UV 0.2mm
- ITO 1.1mm
- Sensor glass
- ITO

BOTTOM