

1 2 3 4 5 6 7 8

A

A

B

B

C

C

D

D

E

E

F

F

G




G

H

H

- \* Poles:1-50
- \* Material : NORYL UL 94V-1 BLACK
- Specifications**
- \* Current rating : 3A AC, DC
- \* Voltage rating : 250V AC, DC
- \* Temperature range : -25°C~+85°C
- \* Insulation resistance : 1,000M Ω min.
- \* Withstand voltage : 800V AC/minute

inches  
mm

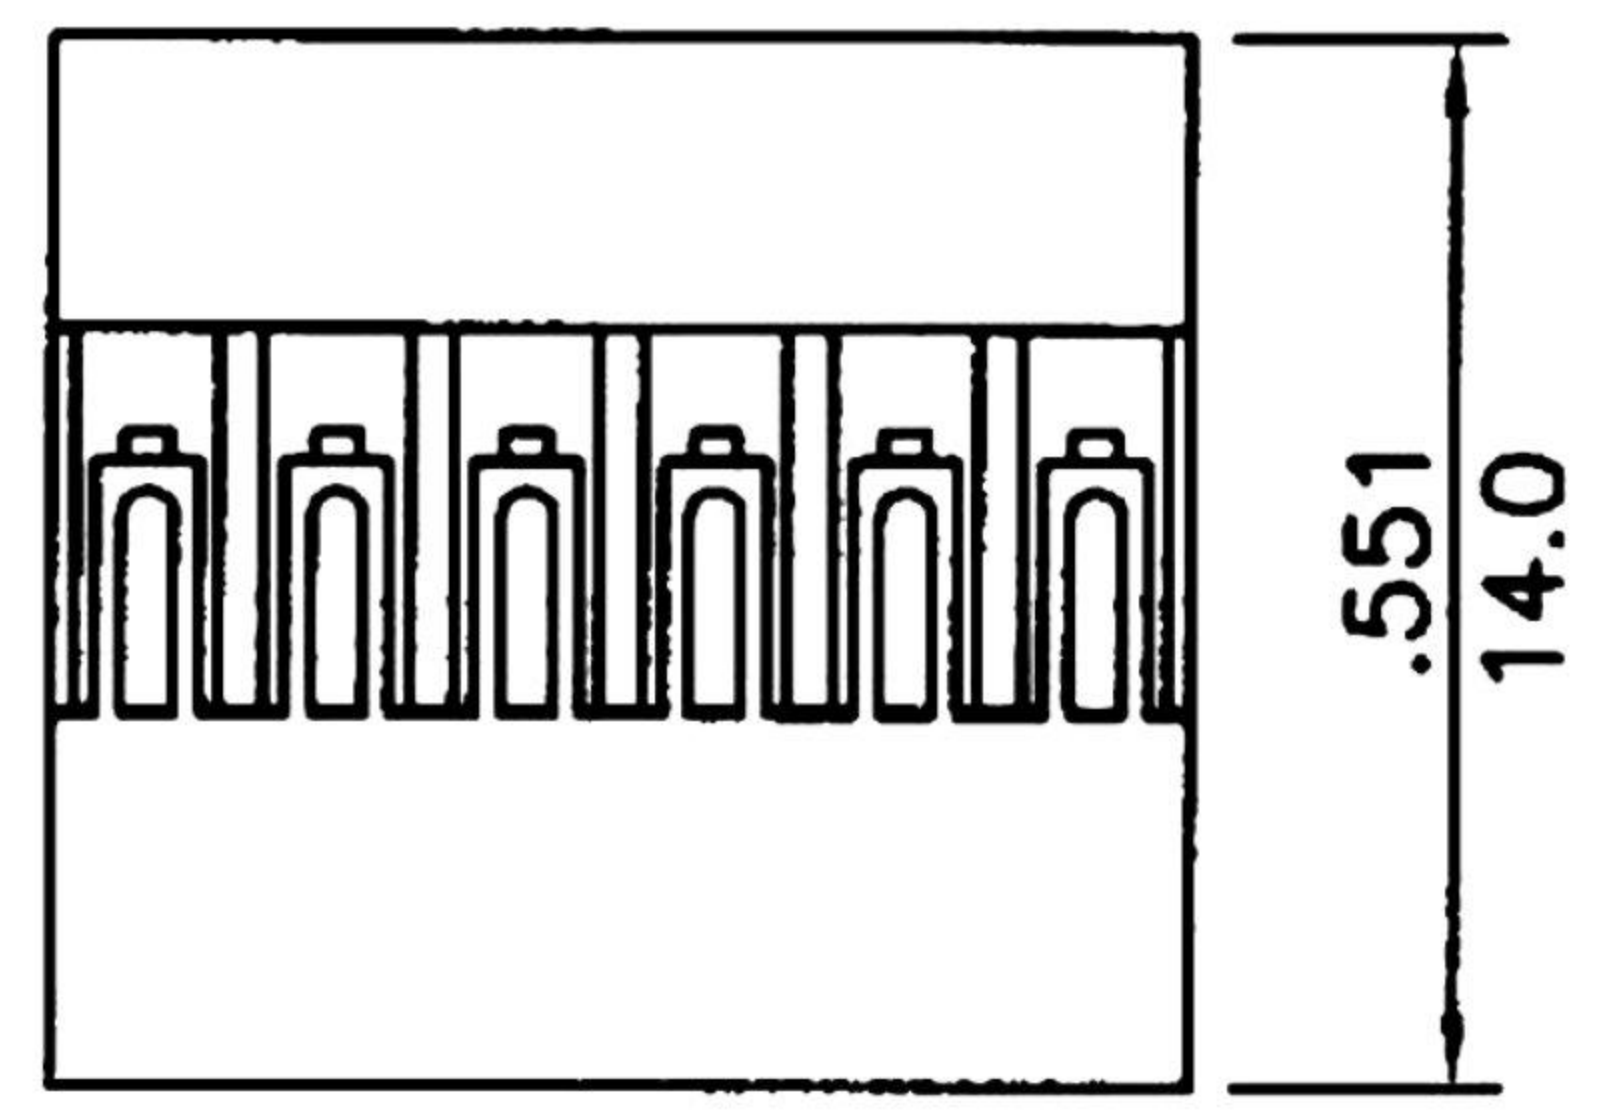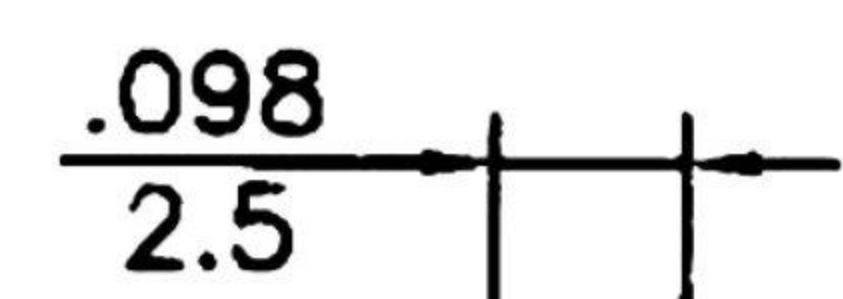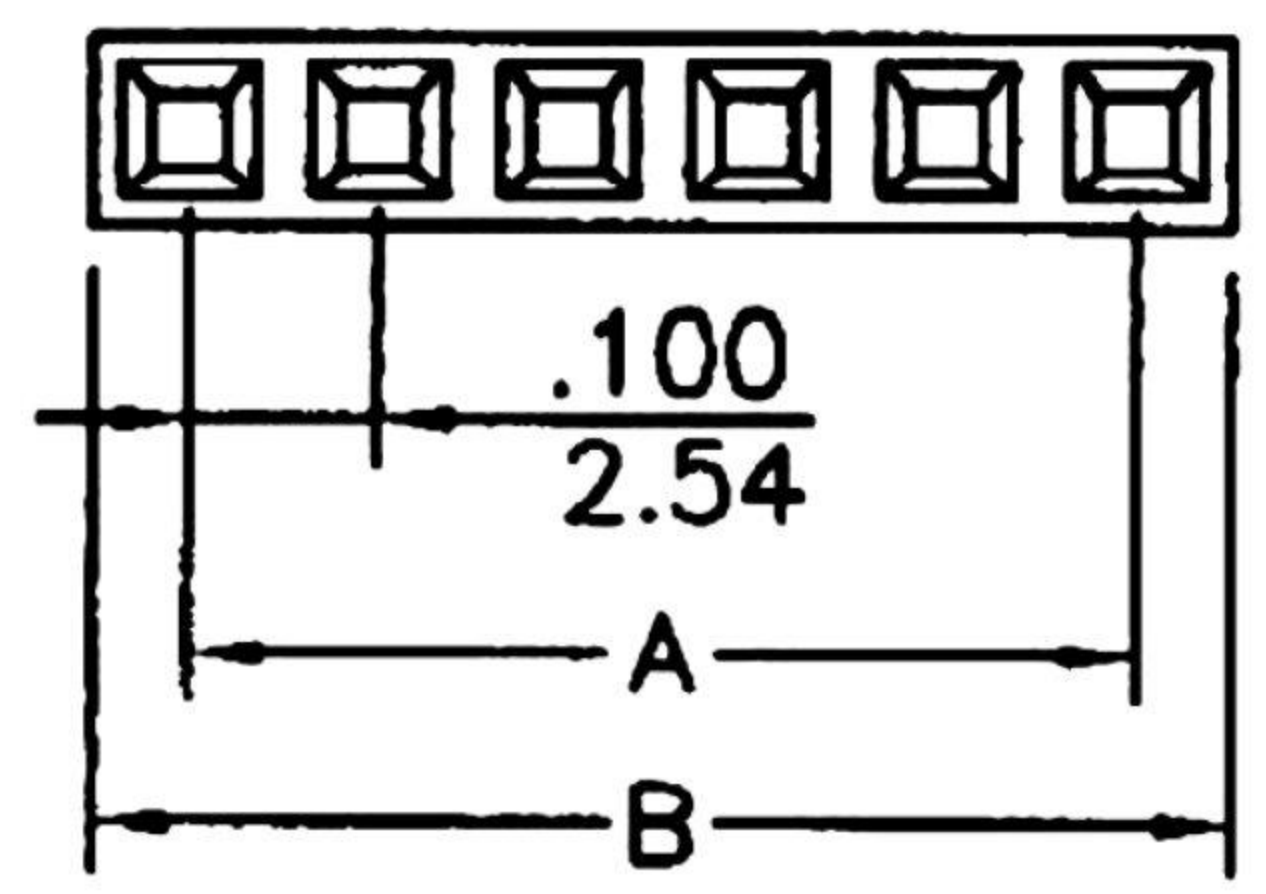

CIRCUITS	DIMENSION in.(mm)		CIRCUITS	DIMENSION	
	A	B		A	B
1		0.104(2.65)	19	1.800(45.72)	1.908(48.46)
2	0.100(2.54)	0.208(5.28)	20	1.900(48.26)	2.008(51.00)
3	0.200(5.08)	0.308(7.82)	21	2.000(50.80)	2.108(53.54)
4	0.300(7.62)	0.408(10.36)	22	2.100(53.34)	2.208(56.08)
5	0.400(10.16)	0.508(12.90)	23	2.200(55.88)	2.308(58.62)
6	0.500(12.70)	0.608(15.44)	24	2.300(58.42)	2.408(61.16)
7	0.600(15.24)	0.708(17.98)	25	2.400(60.96)	2.508(63.70)
8	0.700(17.78)	0.808(20.52)	26	2.500(63.50)	2.608(66.24)
9	0.800(20.32)	0.908(23.06)	27	2.600(66.04)	2.708(68.78)
10	0.900(22.86)	1.008(25.60)	28	2.700(68.58)	2.808(71.32)
11	1.000(25.40)	1.108(28.14)	29	2.800(71.12)	2.908(73.86)
12	1.100(27.94)	1.208(30.68)	30	2.900(73.66)	3.008(76.40)
13	1.200(30.48)	1.308(33.22)	32	3.100(78.74)	3.208(81.48)
14	1.300(33.02)	1.408(35.76)	34	3.300(83.82)	3.408(86.56)
15	1.400(35.56)	1.508(38.30)	35	3.400(86.36)	3.508(89.10)
16	1.500(38.10)	1.608(40.84)	36	3.500(88.90)	3.608(91.64)
17	1.600(40.64)	1.708(43.38)	40	3.900(99.06)	4.008(101.80)
18	1.700(43.18)	1.808(45.92)	50	4.900(124.46)	5.008(127.20)

H 4000 — 02 P S N B 0 0 R

- |   |  |                                |
|---|--|--------------------------------|
| 1. PRODUCTS:<br>H:Housing   | 4. CONTACT TYPE:<br>P:Non Distribution                     | 7. INSULATOR COLOR:<br>B:Black |
| 2. SERIES NO.:<br>4000  | 5. ROW TYPE:<br>S:Single Row<br>D:Dual Rows                | 8. FILL IT WITH "0"            |
| 3. CONTACT NO.:<br>01-30(Single Row)<br>04(2x2)-80(2x40)<br>(Dual Rows) | 6. BODY OPTION:<br>Y:W/ Bump(Dual Rows Only)<br>N:W/O Bump | 9. FILL IT WITH "0"            |
|   |  | 10. R:ROHS                     |

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 Betty	SCALE 比例 參考	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 2.54mm HOUSING SINGLE ROW 1XXXP WITHOUT BUMP BLACK COLOR ROHS
DWG. 製圖 Betty	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 H4000-XXPSNB00R
DATE 制表日 2012/08/17	PAGE 張數 1 OF 1	REV. 版次 A	

1 2 3 4 5 6 7 8