



# LR-i5S62L1 Motherboard Specification

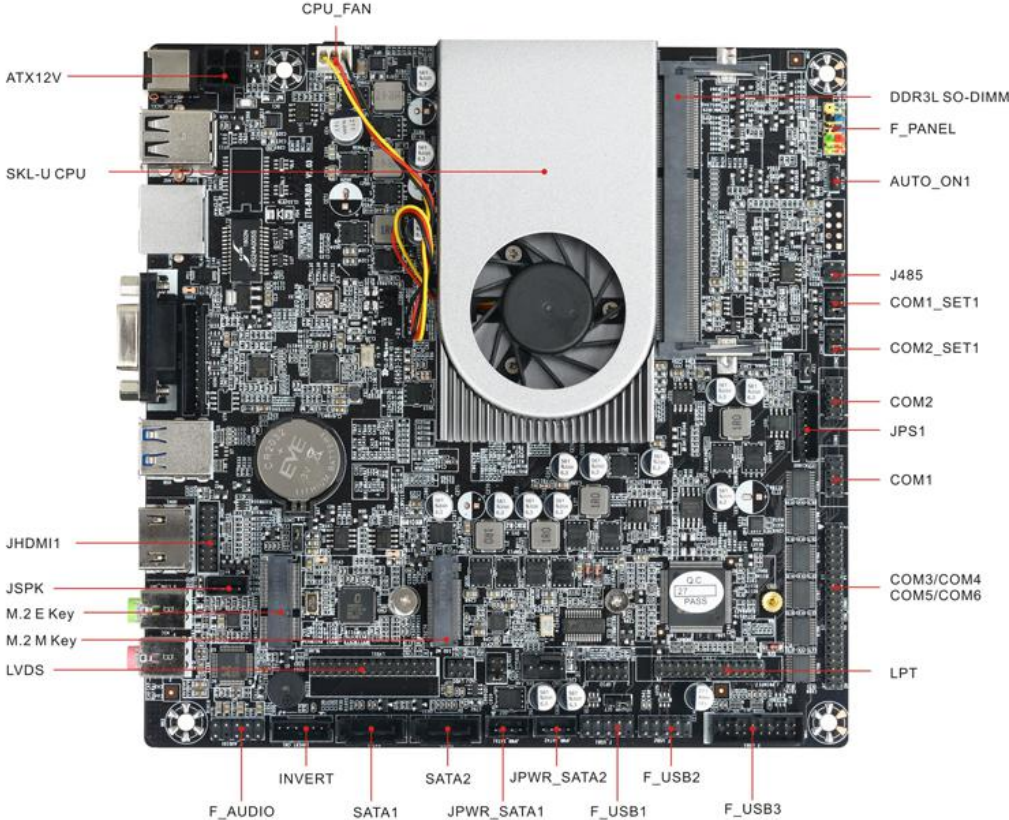

## Parts

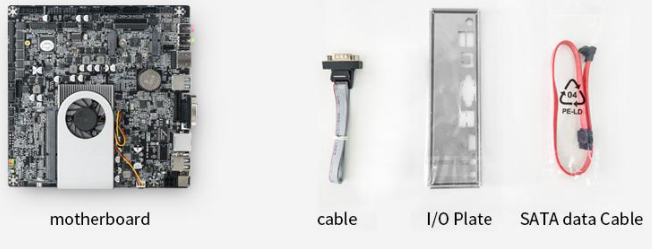

## Specification:

Processor	Intel Core i5-6200U Dual Core 2.3G Turbo Boost 2.8G 3M Cache
Memory	1*S0-DIMM Single Channel DDR3 Slot, Max.8 GB Support 1.35V DDR3L 1600 MHz
Graphics	Intel HD Graphics 520 1*HDMI 1.4a, Max.Resolution 4096*2304 1*VGA, Max.Resolution 1920*1200 1*Dual CH 24bit LVDS, Max.Resolution 1920*1080
AUDIO	Realtek ALC662 HD Audio Controller Supports High Definition Audio Supports 2/4/5.1-CH(Via HDMI)
LAN	Realtek RTL8111F 10/100/1000 Base-Tx GBe Compatible
Expansion	1*M.2 M Key Slot 1*M.2 E Key Slot
USB	4*USB 3.0 Ports (2 rear, 2 via header) 6*USB 2.0 Ports (4 via headers)
On Board I/O	2*M.2 Slot 1*F_Panel 1*CPU_FAN 1*SYS_FAN 1*RTC 2*SATA_PWR 2*SATA 1*LVDS 1*LVDS_PWR 1*USB3.0 Header 2*USB2.0 Header 1*INVERT 1*BKCL 6*COM 1*LPT 2*COM_SET
Storage	2*SATA 6Gb/s, Support 2.5' SSD/HDD 1*M.2 M Key, Supports SATA 6Gb/s&PCIE X4 M.2 SSD
Rear I/O	1*DC_IN 1*LAN 1*VGA

	2*USB3.0 2*USB2.0 1*HDMI 1*HP_OUT 1*MIC_IN
<b>BIOS</b>	AMI uEFI BIOS, 64Mbit SPI Flash ROM
<b>Adapter</b>	12V/5A
<b>OS Information</b>	Supports Windows 8.1/8 32-bit/64-bit Supports Windows 7 32-bit/64-bit Supports Windows ES 7/8 Supports Windows10 32bit/64bit Supports Linux
<b>Operating Temperature</b>	-15°C-60°C
<b>Operating Humidity</b>	0%-95% Relative Humidity, Non-condensing
<b>Form Factor</b>	Based on Thin Mini-ITX form factor 170mm*170mm