

Document Title	128JUW1-A10 Formal Specification	Page No.	1 / 27
Document No.	DC140-003369	Revision	5.0

TO :

Date : **Jan., 14, 2022**

HannStar Product Specification

(Formal)

Model: HSD128JUW1-A10

Note: (1) Please contact HannStar Display Corp. before designing your product based on this module specification.

(2) The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by HannStar for any intellectual property claims or other problems that may result from application based on the module described herein.

(3) The mark “**” of Model means sub-model code.

Document Title	128JUW1-A10 Formal Specification	Page No.	2 / 27
Document No.	DC140-003369	Revision	5.0

Record of Revisions

Rev.	Date	Sub-Model	Description of change
1.0	Nov., 5, 2019	A10	Formal Specification was first released
2.0	Jun.,8, 2020	A10	Modify the 6.6 Backlight unit (P20)
3.0	Sep.,25,2020	A10	Modify the 1.3 Applications (P4) Modify the 5.0 Interface Pin Connection(P14) Modify the 6.5 Power On Sequence(P19)
4.0	Aug. 23, 2021	A10	Modify the 10.0 Package Specification (P25)
5.0	Jan.,14,2022	A10	Modify the 6.4 Interface Timing (P17)

Document Title	128JUW1-A10 Formal Specification	Page No.	3 / 27
Document No.	DC140-003369	Revision	5.0

Contents

1.0	GENERAL DESCRIPTION	4
2.0	ABSOLUTE MAXIMUM RATINGS	5
3.0	OPTICAL CHARACTERISTICS	6
4.0	BLOCK DIAGRAM.....	11
5.0	INTERFACE PIN CONNECTION	13
6.0	ELECTRICAL CHARACTERISTICS.....	15
7.0	RELIABILITY TEST ITEMS	21
8.0	OUTLINE DIMENSION.....	22
9.0	LOT MARK	24
10.0	PACKAGE SPECIFICATION	25
11.0	GENERAL PRECAUTION.....	26

Document Title	128JUW1-A10 Formal Specification	Page No.	4 / 27
Document No.	DC140-003369	Revision	5.0

1.0 GENERAL DESCRIPTION

1.1 Introduction

HannStar Display model HSD128JUW1-A10 is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 12.8" (16:9) inch diagonally measured active display area with 5760 x 1080 dot (1920 horizontal by 1080 vertical pixel) resolution.

1.2 Features

- 12.8 (16:9 diagonal) inch configuration
- 16.7M
- ROHS / Halogen Free Compliance

1.3 Applications

- TFT LCD Monitor
- Industrial Application
- Amusement
- Vehicle

1.4 General information

Item	Specification	Unit	
Outline Dimension	294.4(H) x 175.0(V) x 6.5(Typ.)	mm	
Display area	283.392(H) x 159.408(V)	mm	
Number of Pixel	1920 RGB (H) x 1080(V)	pixels	
Pixel pitch	0.1476(H) x 0.1476 (V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display mode	Normally Black		
NTSC	75 (typ.)	%	
Surface treatment	Glare		
Weight	460 (Typ.)	g	
Back-light	Single LED (Side-Light type)		
Power Consumption	Logic System (White Pattern)	1.65 W (Max)	W
	B/L System	15.504 (Max.)	W

1.5 Mechanical Information

Item	Min.	Typ.	Max.	Unit	
Module Size	Horizontal (H)	293.9	294.4	294.9	mm
	Vertical (V)	174.5	175.0	175.5	mm
	Depth (D)	6.0	6.5	7.0	mm
Weight	—	460	—	g	

Document Title	128JUW1-A10 Formal Specification	Page No.	5 / 27
Document No.	DC140-003369	Revision	5.0

2.0 ABSOLUTE MAXIMUM RATINGS

2.1 Electrical Absolute Rating

2.1.1 TFT LCD Module

Parameters	Symbol	Min.	Max.	Unit	Note
Power Logic	VCC	-0.3	4	V	

2.2 Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Operating Temperature	T _{opa}	-30	85	°C	
Storage Temperature	T _{stg}	-40	90	°C	

Document Title	128JUW1-A10 Formal Specification	Page No.	6 / 27
Document No.	DC140-003369	Revision	5.0

3.0 OPTICAL CHARACTERISTICS

3.1 Optical specification

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note	
Contrast	CR	$\Theta=0$ Normal viewing angle	1100	1500	—		(1)(2)	
Response time	Rising		T_R	—	13	16	msec	(1)(3)
	Falling		T_F	—	12	14		
White luminance (Center)	Y_L			530	700	—	cd/m ²	(1)(4) ($I_L=380mA$)
Color chromaticity (CIE1931)	White		W_x	0.254	0.294	0.334		(1)(4)
			W_y	0.269	0.309	0.349		
	Red		R_x	0.595	0.635	0.675		
			R_y	0.289	0.329	0.369		
	Green		G_x	0.255	0.295	0.335		
			G_y	0.577	0.617	0.657		
	Blue	B_x	0.113	0.153	0.193			
		B_y	0.010	0.050	0.090			
Viewing angle	Hor.	Θ_L	80	85	—			
		Θ_R	80	85	—			
	Ver.	Θ_U	80	85	—			
		Θ_D	80	85	—			
Brightness uniformity	B_{UNI}	$\Theta=0$	70	80	—	%	(5)	
Optima View Direction	Free						(6)	
Reflection	%	R (%)	—	—	5.0	5.5	%	(7)

3.2 Measuring Condition


- Measuring surrounding : dark room
- LED current I_L : **380mA**
- Ambient temperature : $25\pm 2^\circ C$
- 15min. warm-up time.

Document Title	128JUW1-A10 Formal Specification	Page No.	7 / 27
Document No.	DC140-003369	Revision	5.0

3.3 Measuring Equipment

- FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.
- Measuring spot size : 20 ~ 21 mm

Note (1) Definition of Viewing Angle:

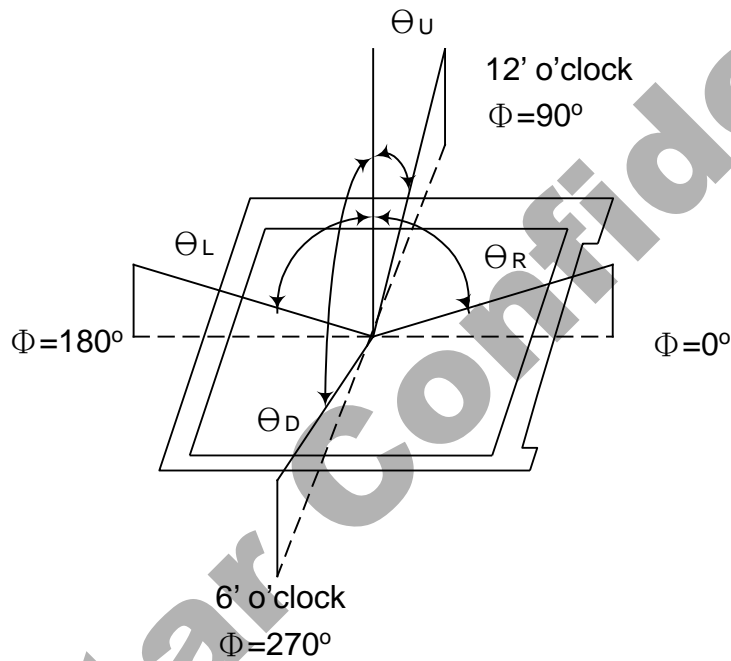


Note (2) Definition of Contrast Ratio (CR) :
measured at the center point of panel


$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

Document Title	128JUW1-A10 Formal Specification	Page No.	8 / 27
Document No.	DC140-003369	Revision	5.0

Note (3) Definition of Response Time : Sum of T_R and T_F

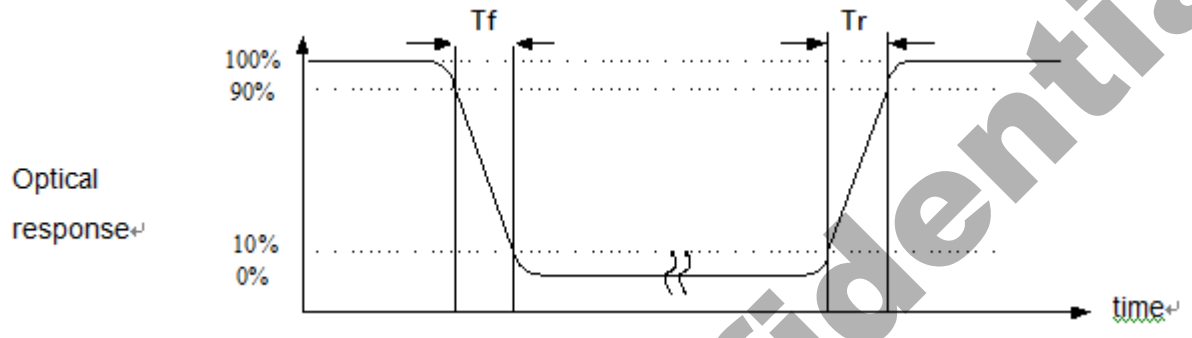


Note (4) Definition of optical measurement setup

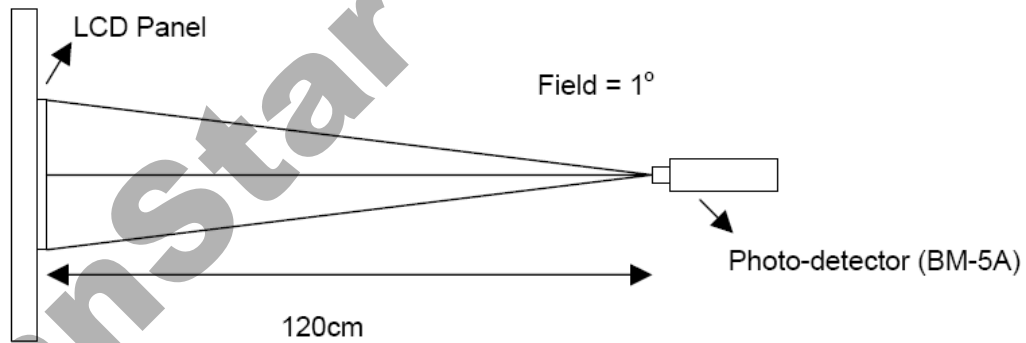

Document Title	128JUW1-A10 Formal Specification	Page No.	9 / 27
Document No.	DC140-003369	Revision	5.0

Note (5) Definition of brightness uniformity

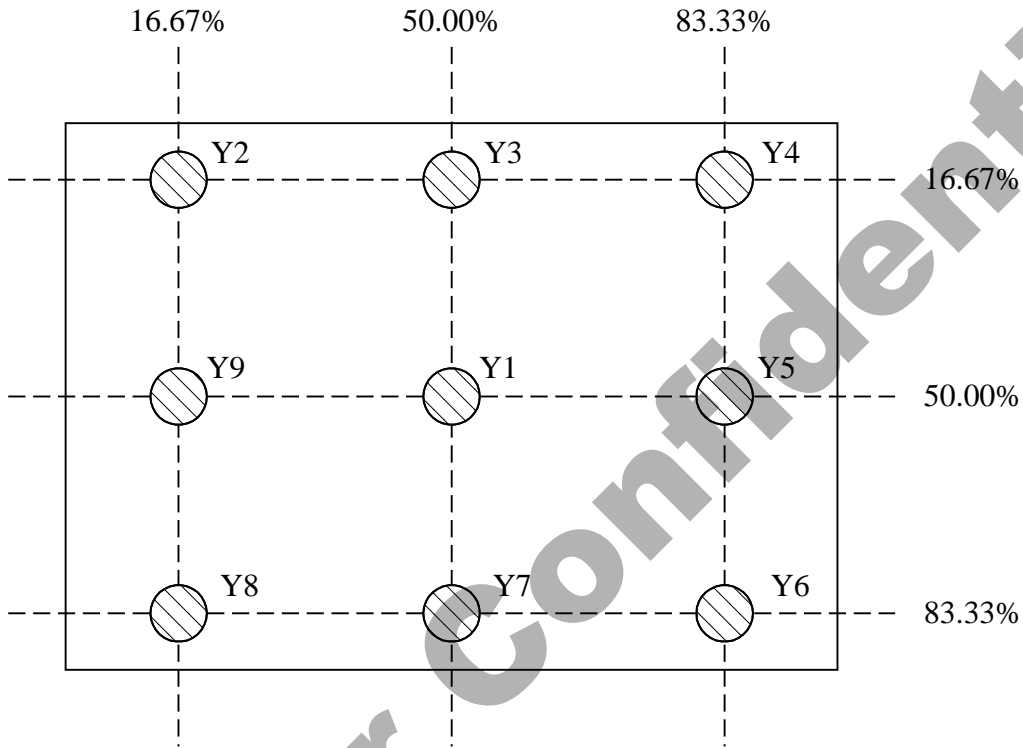

$$\text{Luminance uniformity} = \frac{(\text{Min Luminance of 9 points})}{(\text{Max Luminance of 9 points})} \times 100\%$$


Note (6) : Rubbing Direction (The different Rubbing Direction will cause the different optima view direction.)

Document Title	128JUW1-A10 Formal Specification	Page No.	10 / 27
Document No.	DC140-003369	Revision	5.0

Note (7) Definition of CM-3700A(Konica Minolta) Measurement specification

- The Settings of the instrument :
 - A. reflection rate;
 - B. Measuring the aperture: MAV(8mm);
 - C. Observer perspective: 2°;
 - D. Specular light: SCI;
 - E. The light source: D65.


- The definition of measurement way
 Chromatic meter will display the absorption of shaft and spectral type axial parallel alignment, and placed the sample frame for photometry.

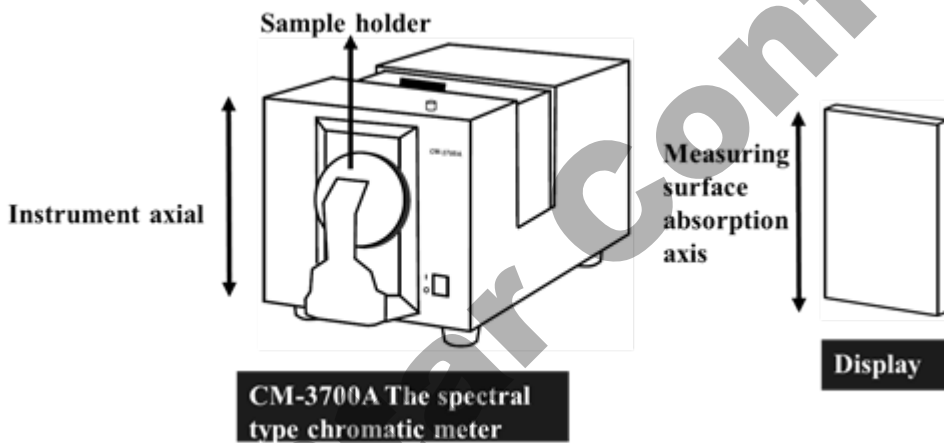


Document Title	128JUW1-A10 Formal Specification	Page No.	11 / 27
Document No.	DC140-003369	Revision	5.0

4.0 BLOCK DIAGRAM

4.1 TFT LCD Module:

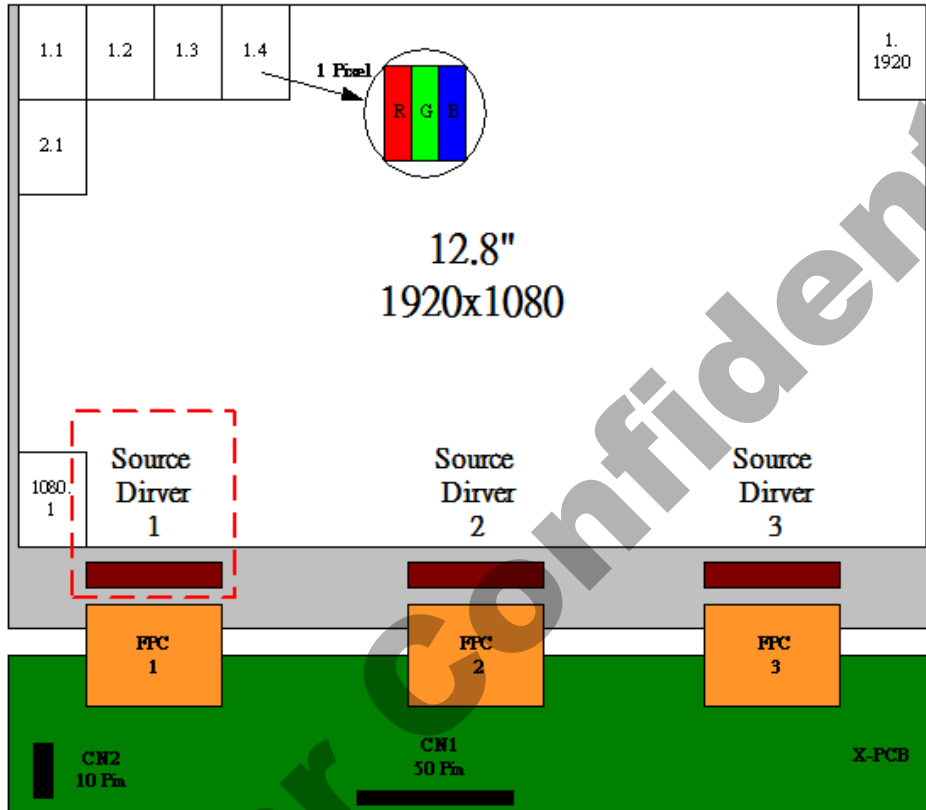

4.2 Pixel Format

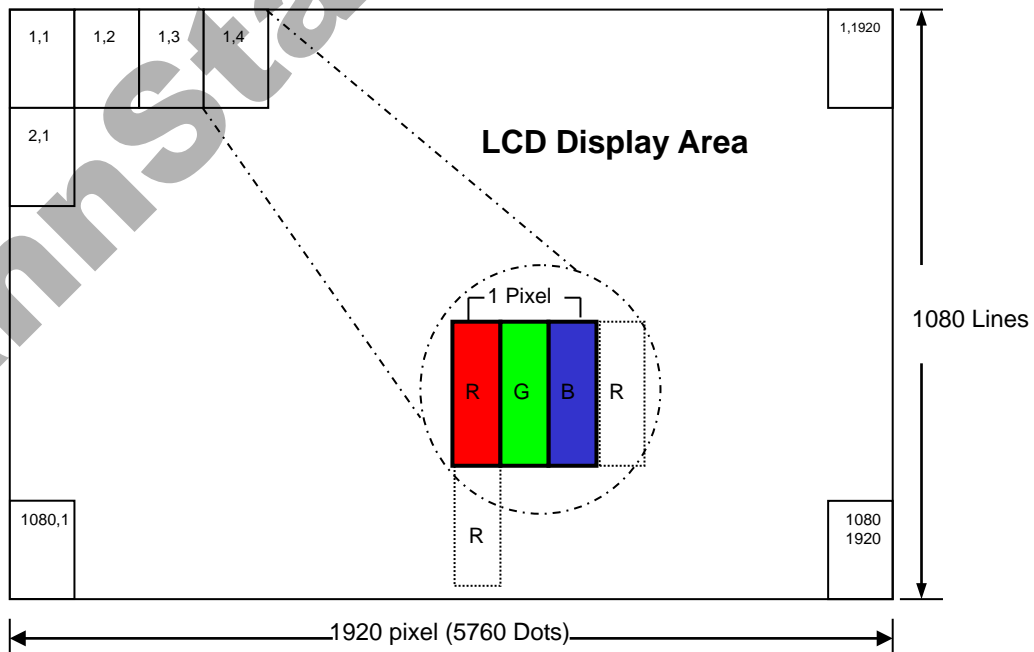

Document Title	128JUW1-A10 Formal Specification	Page No.	12 / 27
Document No.	DC140-003369	Revision	5.0

4.3 Relationship Between Displayed Color and Input

	Display	MSB				LSB				MSB				LSB				MSB				LSB				Gray scale Level
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0	
Basic color	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	-
	Green	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	-
	Light Blue	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-
	Red	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-
	Purple	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	-
	Yellow	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	-
	White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-
Gray scale of Red	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1
		L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251
	Light	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L252
		H	H	H	H	H	H	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L253
		H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L254
Red	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	Red L255	
Gray scale of Green	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L1
		L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251
	Light	L	L	L	L	L	L	L	L	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L252	
		L	L	L	L	L	L	L	L	H	H	H	H	H	L	H	L	L	L	L	L	L	L	L	L253	
		L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L254	
Green	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	Green L255		
Gray scale of Blue	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L1
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251
	Light	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	L	L	L	L252
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	L	H	L	L253
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L254
Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	Blue L255	
Gray scale of White & Black	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark	L	L	L	L	L	L	L	H	L	L	L	L	L	L	H	L	L	L	L	L	L	L	H	L1	
		L	L	L	L	L	L	H	L	L	L	L	L	L	H	L	L	L	L	L	L	L	H	L	L2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251	
	Light	H	H	H	H	H	L	L	H	H	H	H	H	L	L	H	H	H	H	H	L	L	L	L	L252	
		H	H	H	H	H	L	H	H	H	H	H	L	H	H	H	H	H	L	H	L	L	L	L	L253	
		H	H	H	H	H	H	L	H	H	H	H	H	L	H	H	H	H	H	L	L	L	L	L	L254	
White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	White L255		

Document Title	128JUW1-A10 Formal Specification	Page No.	13 / 27
Document No.	DC140-003369	Revision	5.0

5.0 INTERFACE PIN CONNECTION

CN1 FPC connector is used for electronics interface.

AORORA F31L-1A7H1-21050 or BJD 101049-205050 (50PIN)

Pin no.	Symbol	Function	Note
1	GND	Power ground	
2	NC/BIST	No connector(BIST Pin)	
3	VCC	Digital Power/Vin = 3.3V	
4	VCC	Digital Power/Vin = 3.3V	
5	GND	Power ground	
6	GND	Power ground	
7	NC	No connector(Serial interface OTP Power)	
8	NC	No connector	
9	GND	Power ground	
10	ORXIN0-	Negative LVDS differential data input (Odd data)	
11	ORXIN0+	Positive LVDS differential data input (Odd data)	
12	ORXIN1-	Negative LVDS differential data input (Odd data)	
13	ORXIN1+	Positive LVDS differential data input (Odd data)	
14	ORXIN2-	Negative LVDS differential data input (Odd data)	
15	ORXIN2+	Positive LVDS differential data input (Odd data)	
16	ORXCLKIN-	Negative LVDS differential clock input (Odd clock)	
17	ORXCLKIN+	Positive LVDS differential clock input (Odd clock)	
18	ORXIN3-	Negative LVDS differential data input (Odd data)	
19	ORXIN3+	Positive LVDS differential data input (Odd data)	
20	ERXIN0-	Negative LVDS differential data input (Even data)	
21	ERXIN0+	Positive LVDS differential data input (Even data)	
22	ERXIN1-	Negative LVDS differential data input (Even data)	
23	ERXIN1+	Positive LVDS differential data input (Even data)	
24	ERXIN2-	Negative LVDS differential data input (Even data)	
25	ERXIN2+	Positive LVDS differential data input (Even data)	
26	ERXCLKIN-	Negative LVDS differential clock input (Even clock)	
27	ERXCLKIN+	Positive LVDS differential clock input (Even clock)	
28	ERXIN3-	Negative LVDS differential data input (Even data)	
29	ERXIN3+	Positive LVDS differential data input (Even data)	
30	GND	Power ground	

Document Title	128JUW1-A10 Formal Specification	Page No.	14 / 27
Document No.	DC140-003369	Revision	5.0

31	FAULT	FAULT signal output(normal=H,abnormal=L)	note1
32	RESET	Global reset pin, active low.	
33	STBYB	Standby mode setting pin, active low.	
34	NC	No connector(Serial interface chip enable.CSB)	
35	NC	No connector(Serial interface clock input.SCL)	
36	NC	No connector(Serial interface data input/output.CDA)	
37	NC	No connector(Serial interface data input/output.CDA)	
38	GND	Power ground	
39	GND	Power ground	
40	NC	No connector	
41	LEDA	LED power (Anode)	
42	LEDA	LED power (Anode)	
43	LEDA	LED power (Anode)	
44	NC	No connector	
45	LEDK	Cathode 1	
46	LEDK	Cathode 2	
47	LEDK	Cathode 3	
48	LEDK	Cathode 4	
49	NTC_A	NTC_Anode	note2
50	NTC_K	NTC_Cathode	
Note1: IC Enter self protection mode. (No HS/VS/DE/CLK)[Lower than 40Hz]			
Note2: Murata NCU15XH103F6SRC			


Document Title	128JUW1-A10 Formal Specification	Page No.	15 / 27
Document No.	DC140-003369	Revision	5.0

6.0 ELECTRICAL CHARACTERISTICS


6.1 TFT LCD Module

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	VCC	3	3.3	3.6	V	
Input signal voltage	ViH	VCC*0.7	-	VCC	V	
	ViL	0	-	VCC*0.3	V	
Current of power supply	I _{DD}	--	--	500	mA	VCC =3.3V White pattern
Inrush current	I _{RUSH}	—	—	2.0	A	Note*

Note* : Inrush current test circuit and rising time setting (power on)

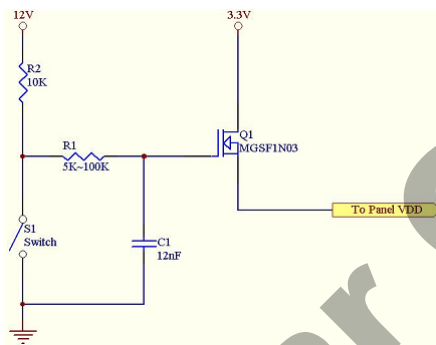

Test circuit

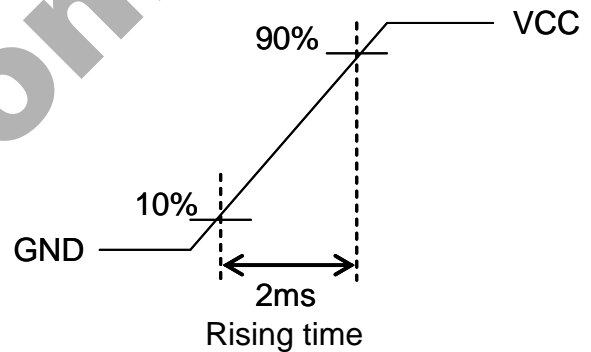

6.2 Switching Characteristics for LVDS Receiver

Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	V _{th}	—	—	100	mV	V _{CM} =1.2V
Differential Input Low Threshold	V _{tl}	-100	—	—	mV	
Input Current	I _{IN}	-10	—	+10	uA	
Differential input Voltage	V _{ID}	0.1	—	0.6	V	
Common Mode Voltage Offset	V _{CM}	1	1.2	1.7-(V _{ID} /2)	V	

Document Title	128JUW1-A10 Formal Specification	Page No.	16 / 27
Document No.	DC140-003369	Revision	5.0

6.3 Bit LVDS input

6.3.1 8Bit LVDS input



Document Title	128JUW1-A10 Formal Specification	Page No.	17 / 27
Document No.	DC140-003369	Revision	5.0


6.4 Interface Timing (DE mode)

Interface Timing (DE mode)					
Two Port LVDS Timing.(1920xRGBx1080)					
Item	Symbol	Min.	Typ.	Max.	Unit
Frame Rate	FR	55	60	65	Hz
Vertical Display Time	T _{vd}	1080			H
Vertical pulse width	T _{vpw}	1	3	20	H
Vertical back porch	T _{vbp}	2	24	200	H
Vertical front porch	T _{vfp}	5	8	200	H
Frame Period	T _v	1087	1112	1404	H
Horizontal Display Time	T _{hd}	960			DCLK
Horizontal pulse width	T _{hpw}	10	12	200	DCLK
Horizontal back porch	T _{hbp}	5	16	200	DCLK
Horizontal front porch	T _{hfp}	24	26	200	DCLK
1 Horizontal line	T _v	989	1002	1248	DCLK
Clock Rate	F _{DCLK}	64.5	66.9	80	MHz


Document Title	128JUW1-A10 Formal Specification	Page No.	18 / 27
Document No.	DC140-003369	Revision	5.0

Timing Diagram of Interface Signal (DE mode)

(1) Vertical input timing

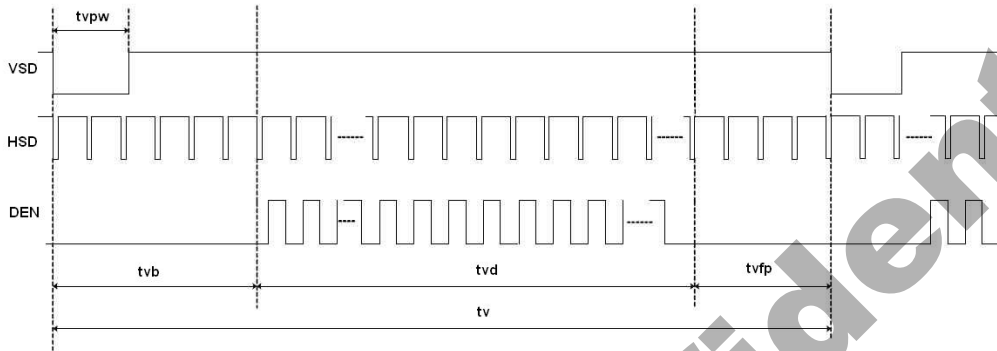


(2) Horizontal Vertical input timing

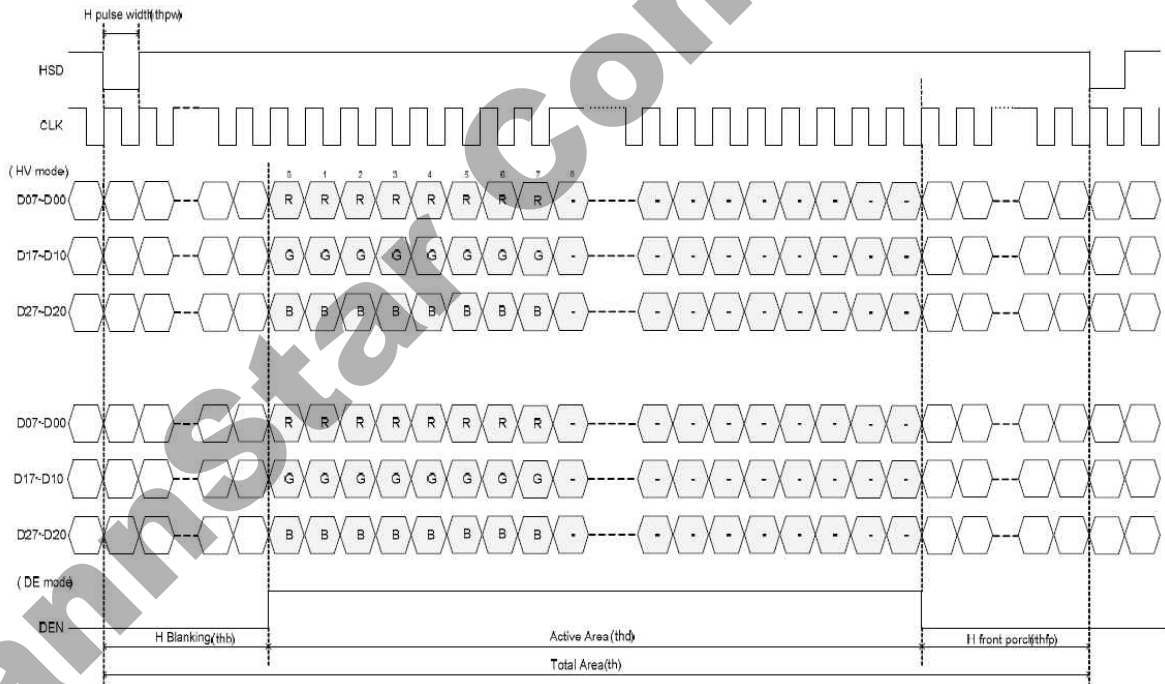


Document Title	128JUW1-A10 Formal Specification	Page No.	19 / 27
Document No.	DC140-003369	Revision	5.0

6.5 Power On / Off Sequence

Power on Sequence

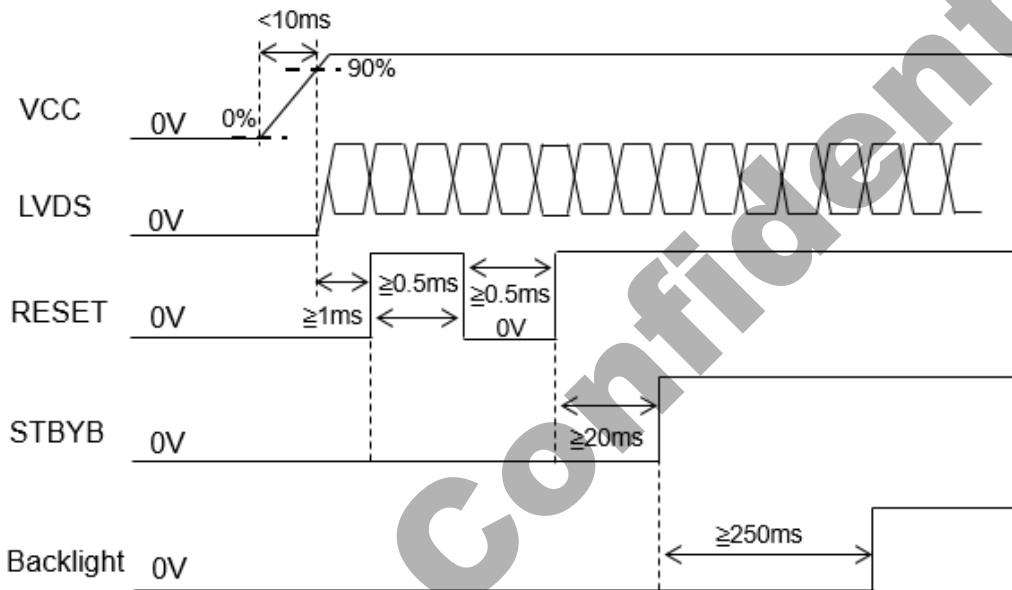

Power off Sequence

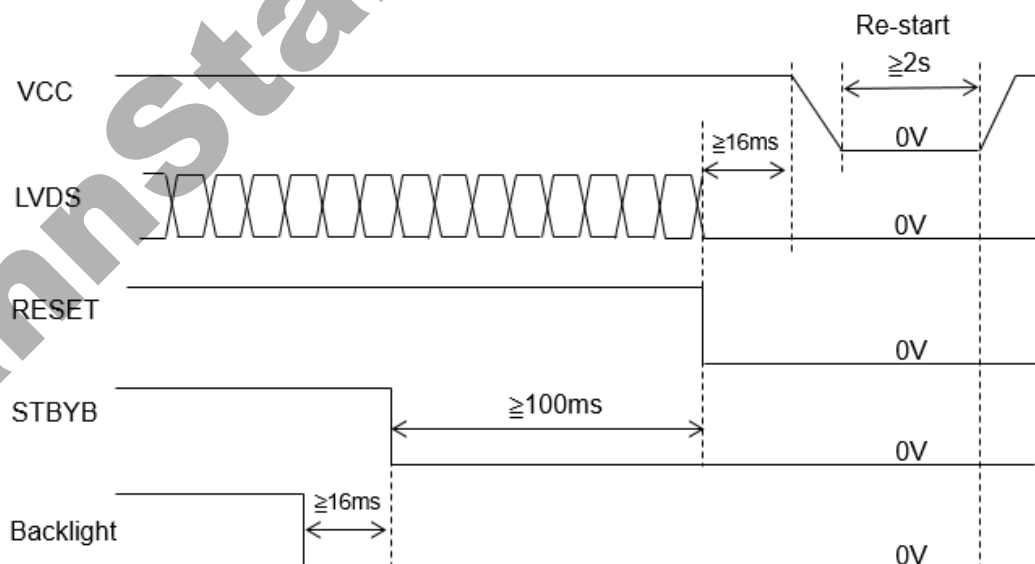

Document Title	128JUW1-A10 Formal Specification	Page No.	20 / 27
Document No.	DC140-003369	Revision	5.0

6.6 Backlight Unit



Parameter	Symbol	Min	Typ	Max	Units	Condition
LED Current	IL	--	380	--	mA	Ta=25°C
LED Voltage	V _F	--	38.4	40.8	Volt	Ta=25°C
LED Life-Time	N/A	30,000	--	--	Hour	Ta=25°C I _F =95mA Note (2)

Note (1) LED life time (Hr) can be defined as the time in which it continues to operate under the condition: Ta=25±3 °C, typical IL value indicated in the above table until the brightness becomes less than 50%.

Note (2) The “LED life time” is defined as the module brightness decrease to 50% original brightness at Ta=25°C and IL= 380 mA. The LED lifetime could be decreased if operating IL is larger than 380 mA. The constant current driving method is suggested.

Note (3) LED Light Bar Circuit 12S4P =48pcs LED

Note (4) LED temperature current curve, The temperature at 70 degrees before the output Duty 100%,70 degrees to 85 degrees when the linear drop to Duty 40%.

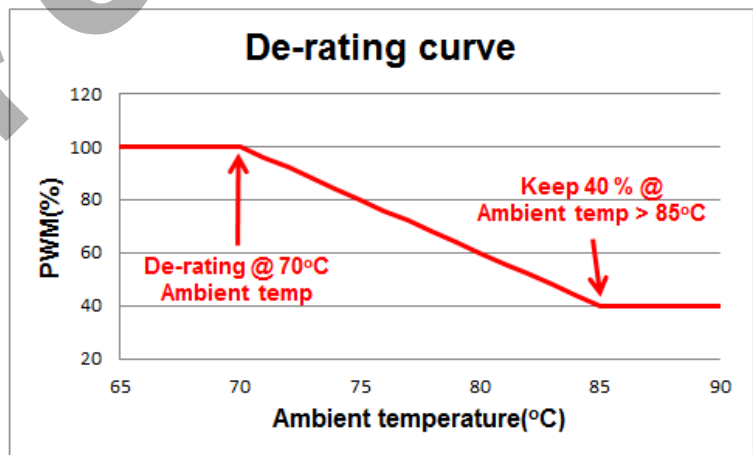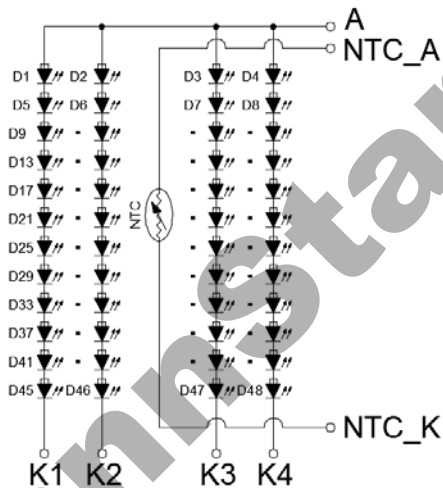

Document Title	128JUW1-A10 Formal Specification	Page No.	21 / 27
Document No.	DC140-003369	Revision	5.0

7.0 RELIABILITY TEST ITEMS

No.	Item	Conditions	Remark
1	High Temperature Storage	Ta=+90°C, 500hrs	1, 2, 3
2	Low Temperature Storage	Ta=-40°C, 500hrs	1, 2, 3
3	High Temperature Operation	Ta=+85°C, 500hrs	1, 2, 3
4	Low Temperature Operation	Ta=-30°C, 500hrs	1, 2, 3
5	High Temperature and High Humidity (operation)	Ta=+65°C, 90%RH, 240hrs	1, 2, 3
6	Thermal Cycling Test (non operation)	-30°C(30min)→+85°C(30min),100 cycles	1, 2, 3
7	Electrostatic Discharge	R=330Ω,C=150pF Contact = ± 8 kV, class B Air = ± 15 kV, class B 1 time for each point	
8	Vibration	1.Random: 1.04G, 10~500Hz, XYZ, 30min/each direction 2.Sine: Freq.Range, 8~33.3Hz, Stoke: 1.3mm Sweep: 2.9G, 33.3~400Hz X/Z: 2hrs, Y:4hrs	
9	Shock	Half-Sine, 100G, 6ms, ±XYZ, 1time	
10	Vibration (with carton)	Random: 0.015G ² /Hz, 5~200Hz -6dB/Octave, 200~400Hz XYZ, 2hrs/each direction	
11	Drop (with carton)	Drop height condition, basis on the product weight and follow QB200-0015, 1 corner, 3 edges, 6 surfaces	

Note1: There is no display function NG issue occurred, all the cosmetic specification is judged before the reliability stress.

Note2: The test result shall be evaluated after the sample has been left at room temperature and humidity for 2 hours without load. No condensation shall be accepted. The sample shall be free from defects:


(Air bubble in the LCD 、 Seal leak 、 Non-display 、 Missing segments 、 Glass crack).

Note3: The test condition definition panel's surface temperature.

Document Title	128JUW1-A10 Formal Specification	Page No.	22 / 27
Document No.	DC140-003369	Revision	5.0


8.0 OUTLINE DIMENSION

Unit : mm

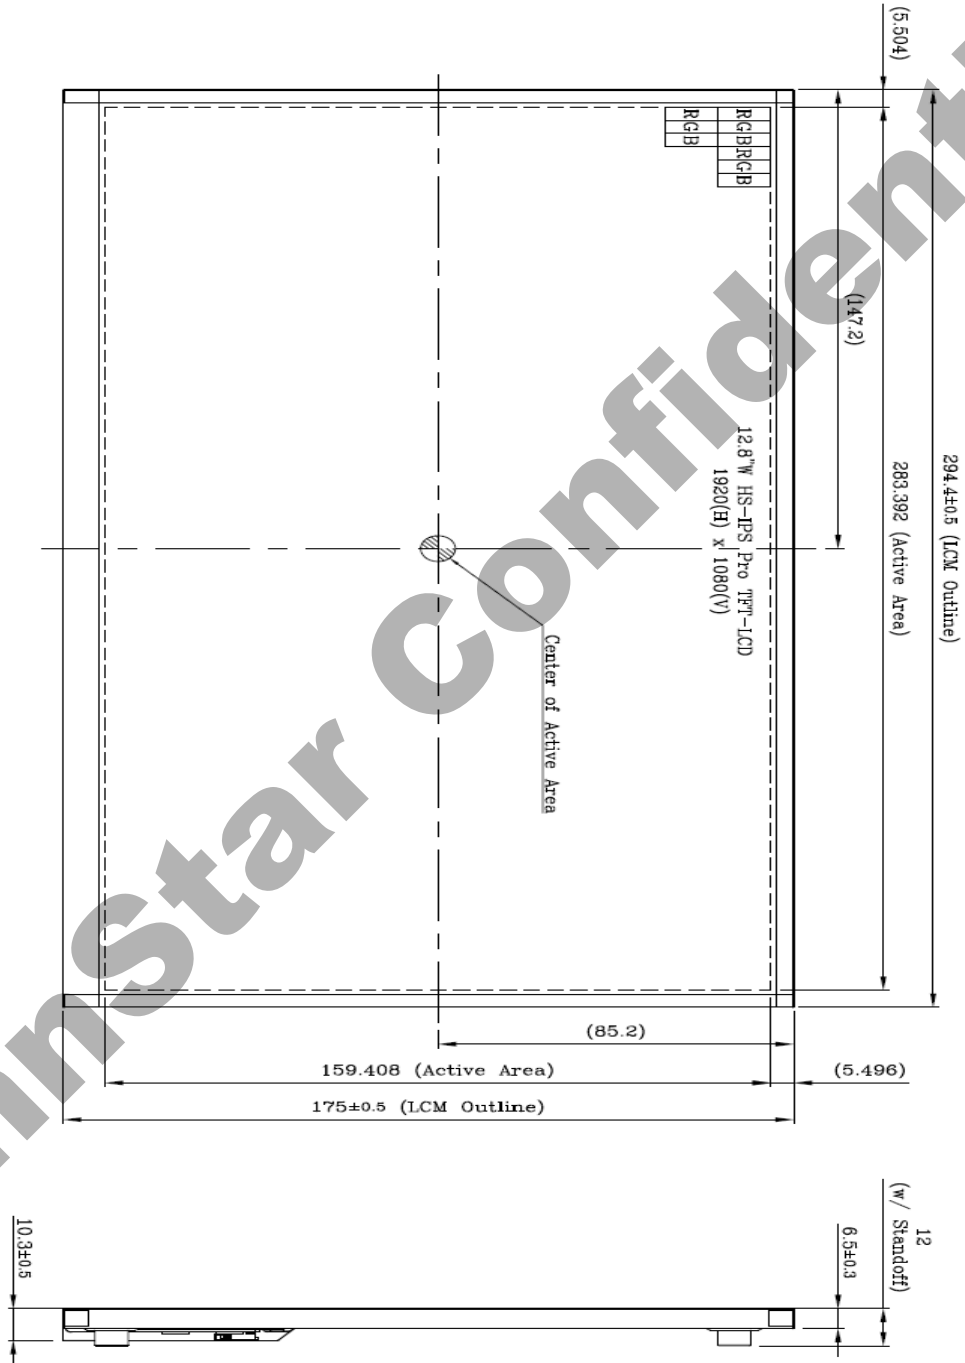

Note: General tolerance: +/- 0.3mm

Document Title	128JUW1-A10 Formal Specification	Page No.	23 / 27
Document No.	DC140-003369	Revision	5.0

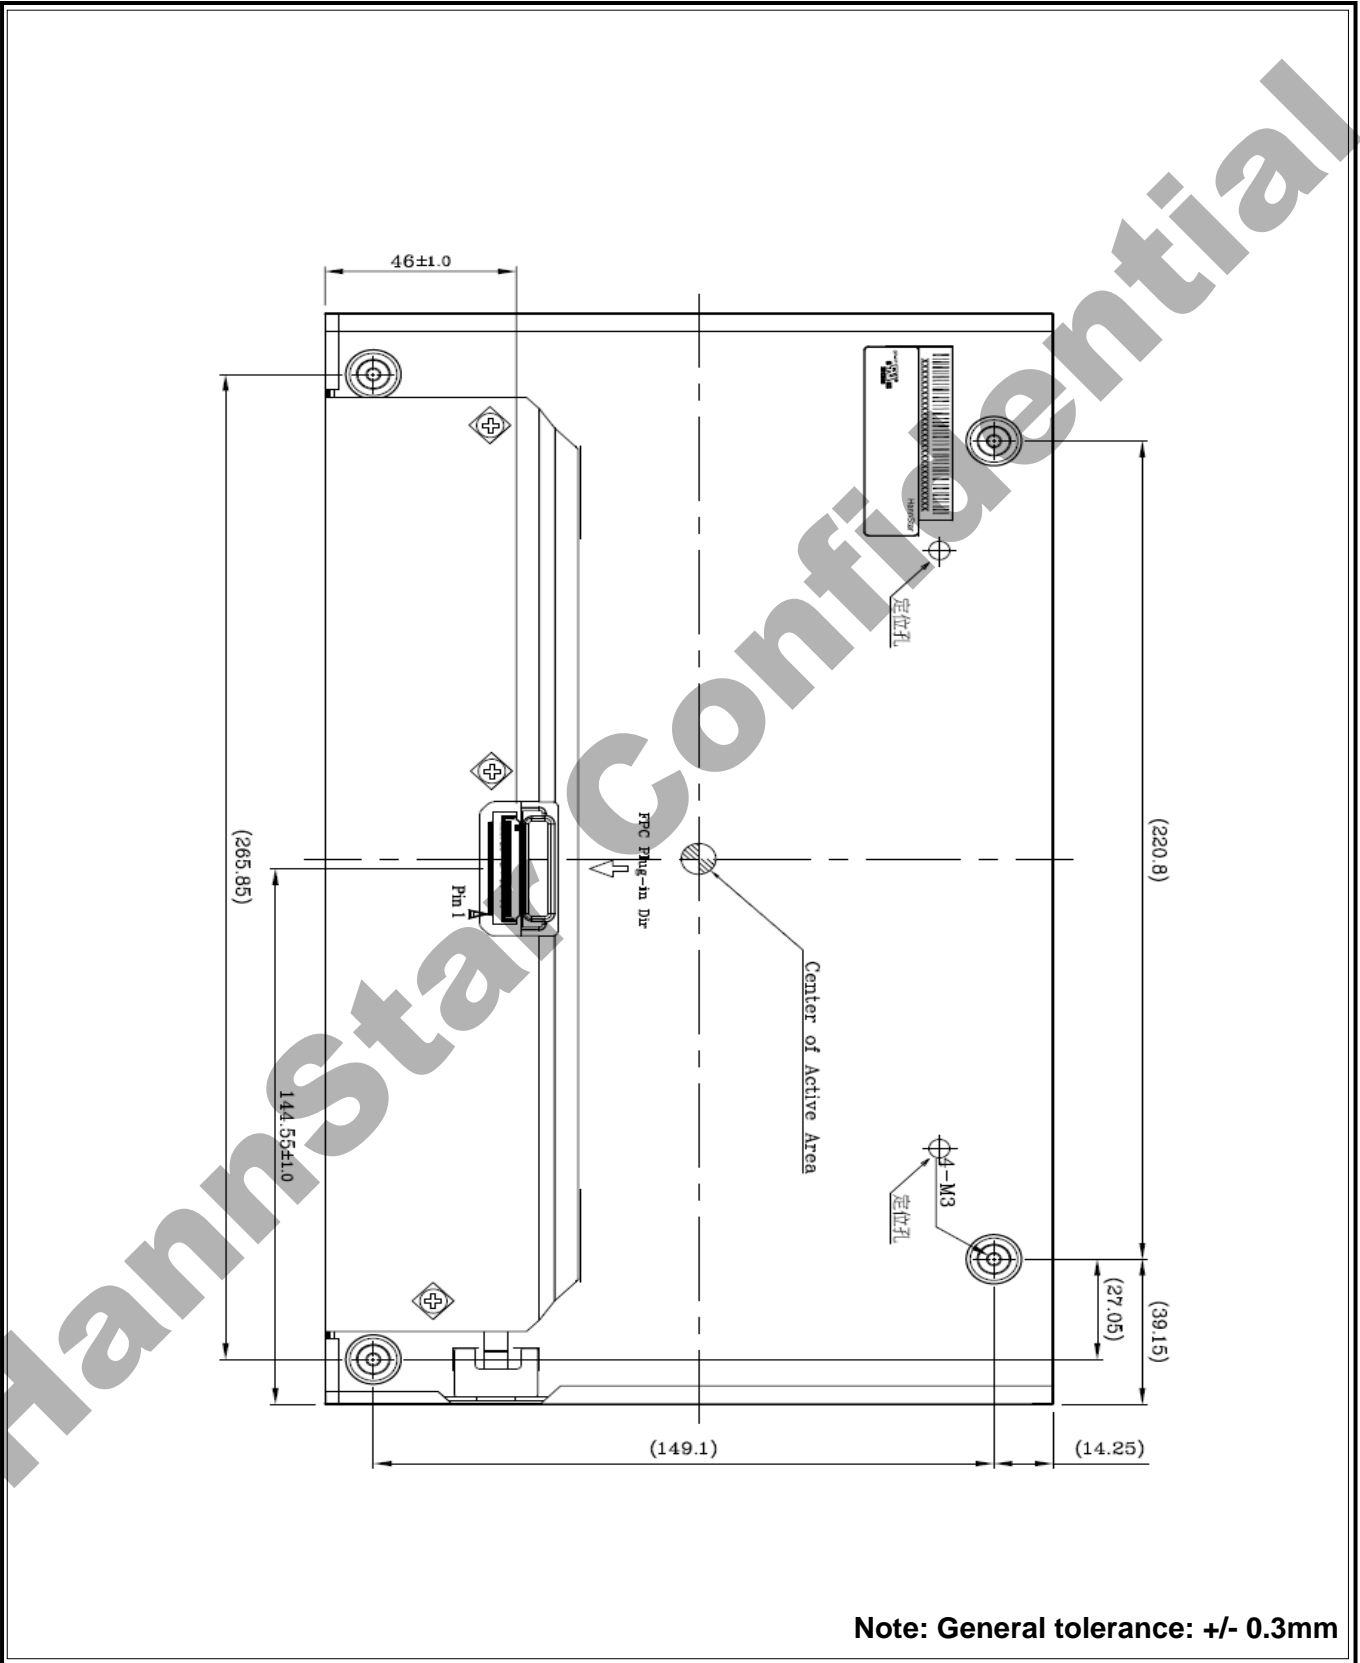

Note: General tolerance: +/- 0.3mm

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

Document Title	128JUW1-A10 Formal Specification	Page No.	24 / 27
Document No.	DC140-003369	Revision	5.0

9.0 LOT MARK

9.1 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----

Code 1,2,3,4,5,6: HannStar internal flow control code.

Code 7: production location.

Code 8: production year.

Code 9: production month.

Code 10,11,12,13,14,15: serial number.

Note (1) Production Year: Code 8 is defined by the last number of the year, for example

Year	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028
Mark	9	0	1	2	3	4	5	6	7	8

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C


9.2 Detail of Lot Mark

- (1) Below label is attached on the backside of the LCD module. See Section 8.0: Outline Dimension.
- (2) The detail of Lot Mark is attached as below.
- (3) This is subject to change without prior notice.



Document Title	128JUW1-A10 Formal Specification	Page No.	25 / 27
Document No.	DC140-003369	Revision	5.0

10.0 PACKAGE SPECIFICATION

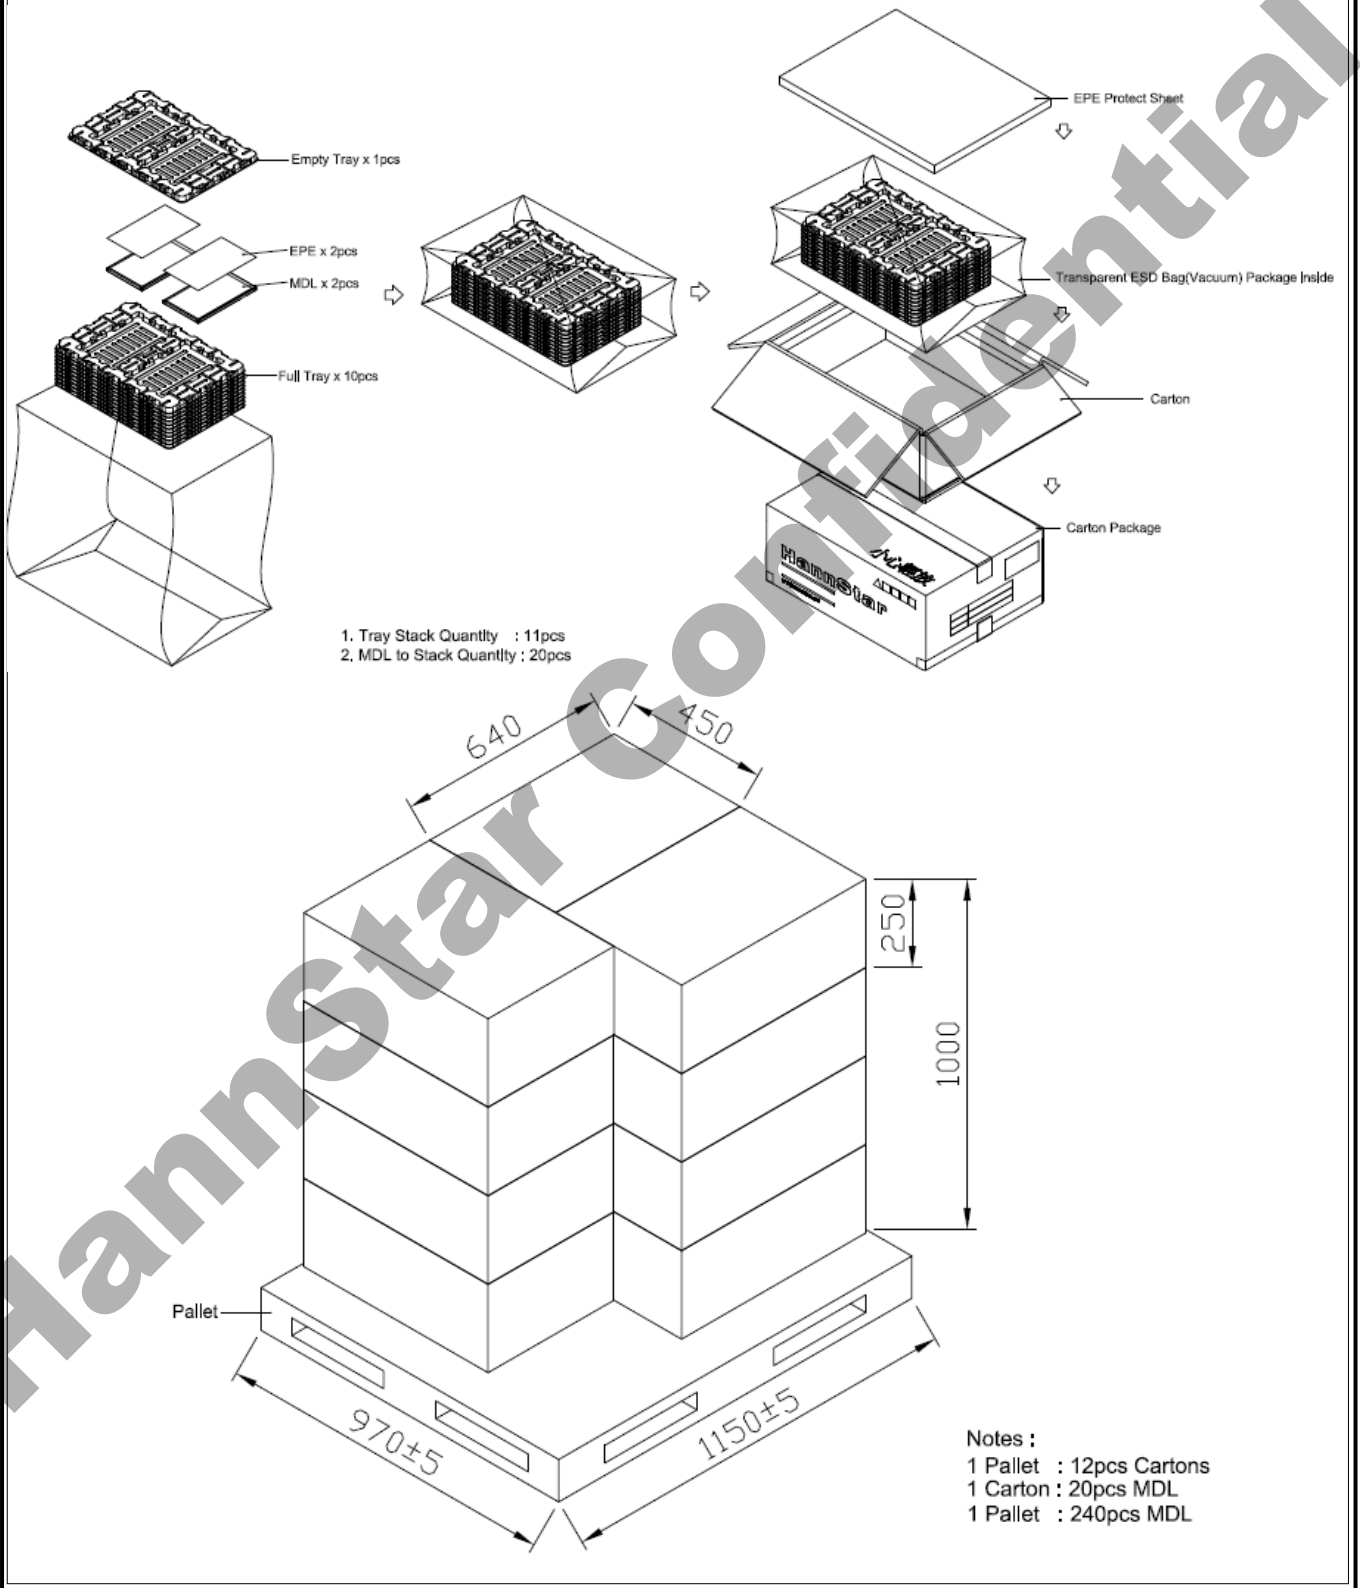

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.

Document Title	128JUW1-A10 Formal Specification	Page No.	26 / 27
Document No.	DC140-003369	Revision	5.0

11.0 GENERAL PRECAUTION

11.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

11.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

11.3 Breakage of LCD Panel

11.3.1. If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.

11.3.2. If liquid crystal contacts mouth or eyes, rinse out with water immediately.

11.3.3. If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

11.3.4. Handle carefully with chips of glass that may cause injury, when the glass is broken.

11.4 Electric Shock

11.4.1. Disconnect power supply before handling LCD module.

11.4.2. Do not pull or fold the LED cable.

11.4.3. Do not touch the parts inside LCD modules and the fluorescent LED's connector or cables in order to prevent electric shock.

11.5 Absolute Maximum Ratings and Power Protection Circuit

11.5.1. Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.

11.5.2. Please do not leave LCD module in the environment of high humidity and high temperature for a long time.

11.5.3. It's recommended to employ protection circuit for power supply.

11.6 Operation

11.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.

11.6.2 Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.

11.6.3 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.

Document Title	128JUW1-A10 Formal Specification	Page No.	27 / 27
Document No.	DC140-003369	Revision	5.0

11.6.4 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.

11.6.5 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.

11.7 Mechanism

Please mount LCD module by using mounting holes arranged in four corners tightly.

11.8 Static Electricity

11.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.

11.8.2 Because LCD module use CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge. Persons who handle the module should be grounded through adequate methods.

11.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

11.10 Disposal

When disposing LCD module, obey the local environmental regulations.