



Ver.	modify NO.	Details	Area	P.I.C	Date





Front View

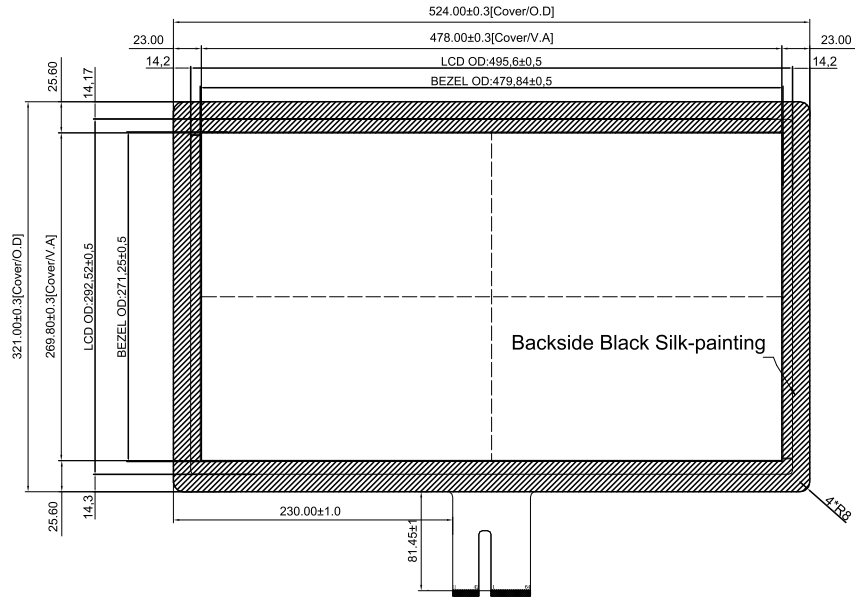

Side View

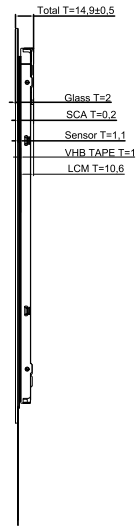

Back View

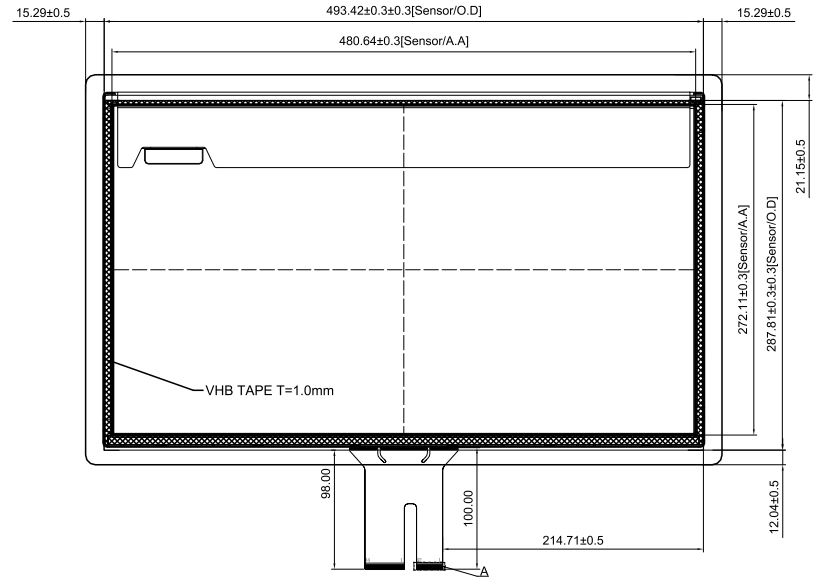

Technical Datasheet:

- Structure: TP+LCM Tape Bonding
- Cover Glass: 2mm Tempered glass,
- LCD: DV215FHM-NN0
- TP Controller: BTP-TMS-CTR-ILI-215B-R16
Interface: USB/IIC/RS232
- TP Controller IC: ILI2510(TX*RX=34*60)
- Surface Hardness: ≥6H
- Light Transmittance: ≥85%
- Operating Temperature: -20℃~+70℃, ≤85%RH;
Operating environment: Outdoor, water proof
- Storage Temperature: -20℃~+80℃, ≤85%RH
- Unmarked Tolerance: ±0.5mm
- All materials used conform to RoHS standards

Part No.		BTP-TMS-21.5-DV2-ILI-R16		
Product Name:		Drawing No.	MS215230428R16	
21.5inch Touch Display (TP+LCM Tape Bonding)		Project Code.	MS215R16	
Business Unit:		Period Mark	View Angle	Ratio
SNT-BTP		A		1:1
Workmanship:	Yong.Xin	Page 1		Total 1 Page
Standardization:	Link.Chen	BOM Code	2.22.215.04.0116	
Released by:	Rocky.Liu	Product Series	BTP-MS	
		恩诺泰科电子(苏州)有限公司 SINOTECTRONICS INC.		