



**Product Features**

- 1, Constant current output
- 2, High Quality of light
- 3, High Reliability
- 3, Low Output Current Ripple
- 4, Non-isolated
- 5, Internal usage
- 6, DIP Switch 250/300/350/400/450/500/550/600mA

**1) Compliances and Approvals**

Approvals	CE EAC
Built-in/independent	Built in
Ingress protection	IP20
Suitable for fixture of protection Class	Class I
Output Safety Level	Non-isolated
Enviromental	Indoor
Features	Fixed

**2) Electric Input Characteristics**

Symbol	Remarks	Min.	Typical	Max.	Unit	
<b>Input Voltage</b>						
Rated mains voltage	Vin	Nominal range	220	-	240	Vac
Mains voltage range	Vin.op	operational	195	-	264	Vac
Mains frequency nominal	fn	Nominal range	50		60	Hz
Rated mains voltage	Vin	Nominal range		NA		Vdc
<b>Input Current</b>						
Input current	lin	@230Vac, full load		0.32		A
Input inrush current		@264Vac, 50% width		23.7A,180us		A, us
Power Factor	PF	@230Vac, full load	0.95			
Total Harmonic distortion	THD	@230Vac, full load			10	%
System Efficiency	η	@230Vac, full load		92		%
<b>Input Power</b>						
Input Power	Pin	@230Vac, full load			65	W
Input Power@ open load		rated input voltage			0.5	W
Input Power@ standby		rated input voltage		NA		
<b>Dimming</b>						
Dimming type			DIP SWITCH			

**3) Electric Output Characteristics**

Symbol	Remarks	Min.	Typical	Max.	Unit	
<b>Output Voltage</b>						
Output voltage range	Vo	measured at end of wire	80		200	Vdc
Output voltage @no load	Vo.max	open load		260		Vdc
<b>Output Current</b>						
Output Current	Io			250/300/350/400/450/500/550/600	mA	
Default Setting Current	Io		600		mA	

DIP when power on is NOT allowed, please disconnect the AC power before DIP

PIN1	PIN2	PIN3	Uout	Iout
OFF	OFF	OFF	80-200V	250mA
OFF	OFF	ON	80-200V	300mA
OFF	ON	OFF	80-170V	350mA
OFF	ON	ON	80-150V	400mA
ON	OFF	OFF	80-120V	450mA
ON	OFF	ON	80-120V	500mA
ON	ON	OFF	80-105V	550mA
ON	ON	ON	80-100V	600mA

Output Current tolerance		-7.5		7.5	%
Current Ripple		@230Vac (Imax-Imin)/(Imax+Imin)		1	%
<b>Output Power</b>	Po	output performance power		60	W
<b>Isolation</b>	In-Out	3000Vac. for 1min		NA	mA


4) Robustness	Symbol	Remarks	Min.	Typical	Max.	Unit
<b>General</b>						
Electric strength	Input-Output	50Hz/60Hz and be applied for 1 min		NA		Vrms
	Input-GND			1480		Vrms
Insulation Resistance Test		500Vd.c. for 1min, For SELV part is 100 Vd.c.	2			MΩ
<b>Reliability</b>						
Rated Life@Tc.max		10% failure			50K	Hrs
Rated Life@Tc.life		10% failure			100K	Hrs
Surge	L-N			1		kV
Surge	L/N-PE			2		kV
<b>Environment Operation</b>						
Ambient temperature	Ta		-40		45	℃
Maximum Tcase	Tc.max				80	℃
Tc life	Tc.life				70	℃
Operation Humidity	H.op		10		90	%
<b>Environment Storage</b>						
Storage temperature	T.st		-40		85	℃
Storage Humidity	H.st		10		90	%
<b>Abnormal Condition</b>						
Input Over Voltage		Protected, no damage to driver <sup>①</sup>		Without		Vac
Output Short Circuit		Protected, no damage to driver <sup>②</sup>		With		
Output Open load		Output voltage limited to Vo.max <sup>③</sup>		220		Vdc
Too High Ambient Temperature		Protected by built-in thermal protection in controller IC <sup>④</sup>		With		
Input Over Power		Input power should be limited and no damage to driver <sup>⑤</sup>			65	W

- ① If the LED driver connects to Input Voltage 380Vac, then the protection Turn On and the Led driver is switched off until its connect to Input voltage 220-240Vac. In this protection mode, the led driver does not blink and can be not damage more than 48 hours
- ② Auto Recovery
- ③ Auto Recovery
- ④ The output current decreases
- ⑤ There is risk to damage the LED driver or decreases the life time.

#### 5) Warranty

- Warranty 5 years
- Except for the following circumstance:
  - 1) Improper Installation or operation
  - 2) Misuse
  - 3) Abuse
  - 4) Unauthorized or improper repair alteration
  - 5) Accident or negligence in use, storage, transportation.
  - 6) Any natural destroy
  - 7) Exceed the specification as per the product datasheet

6) Mechanical properties	Symbol	Remarks					Unit
Dimensions			L	W	H	M	
			195(A1)	30(B1)	21.5(C1)	184.8(A2)	mm
Housing Material			Metal				

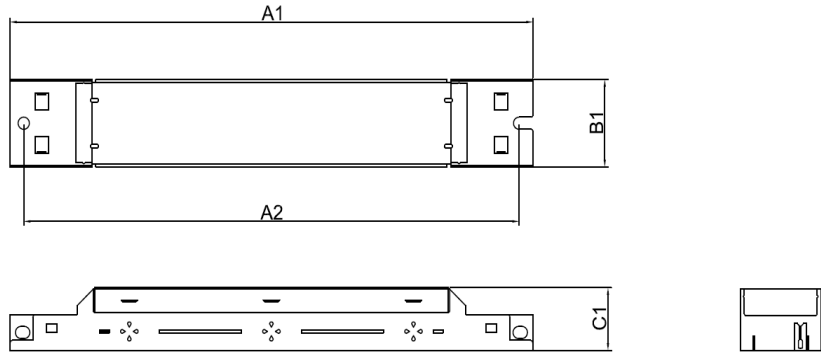

7) Physical properties	Symbol	Remarks	Unit
Weight		130	gram
Qty to Carton		100	pcs
Carton Size:		32*20.5*27	cm
G.W:		13.5	kgs
Potting Raw materials		without	
Printing		printing can be changed by customer's email confirmation	

size:127\*26mm

**INPUT**

L

N

⊕

**LED Driver**

**PL-HMD-060WA0600C**

220-240Vac 50/60Hz

Pin	65W	lin	0.32A
PF	0.95	Umax	260V
Iout	600mA	Uout	80-100V
Ta	-40...45°C	Tc	80°C

PIN1	PIN2	PIN3	Uout	Iout
OFF	OFF	OFF	80-200V	250mA
OFF	OFF	ON	80-200V	300mA
OFF	ON	OFF	80-170V	350mA
OFF	ON	ON	80-150V	400mA
ON	OFF	OFF	80-130V	450mA
ON	OFF	ON	80-120V	500mA
ON	ON	OFF	80-105V	550mA
ON	ON	ON	80-100V	600mA

**OUTPUT**

⊕

⊖

CE ENEC

9-10mm 0.5-0.75 Cable

Made in China

Connection		Signal	Cable Description	Remark
		Input	L	0.5-0.75mm <sup>2</sup>
	N	0.5-0.75mm <sup>2</sup>	grey, push-in terminal	
	G	0.5-0.75mm <sup>2</sup>	grey, push-in terminal	
Output	+	0.5-0.75mm <sup>2</sup>	red, push-in terminal	
	-	0.5-0.75mm <sup>2</sup>	black, push-in terminal	
Connection Marking		Yes		

**8) Directives / Test Standards**

**Directives / Test Standards**


<b>Safety</b>	IEC61347-1、IEC61347-2-13
<b>EMC</b>	EN55015、CISPR15、EN61000-3-2、EN61547、EN61000-4-2、EN61000-4-3、EN61000-4-4、EN61000-4-5、EN61000-4-6、EN61000-4-11

**9) Addition Remarks**


- The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. The manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.
- The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheet.
- All parameters, if not specified, are measured at 230Vac full loading and 25°C ambient temperature

**10) Performance**


**Lifetime vs. Temperature Curve**

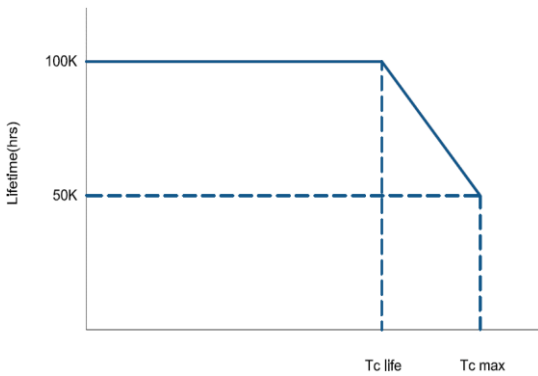

**Operating window**

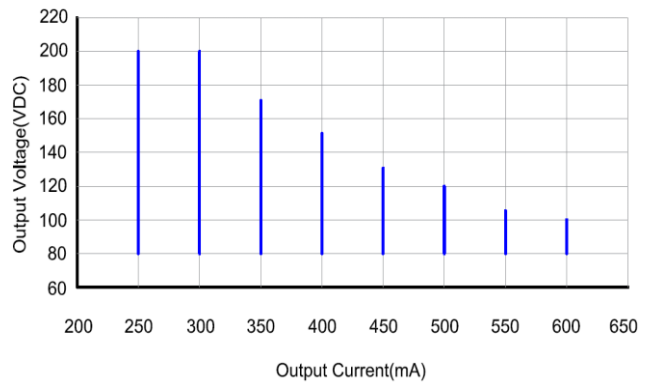

**Efficiency VS. Load**

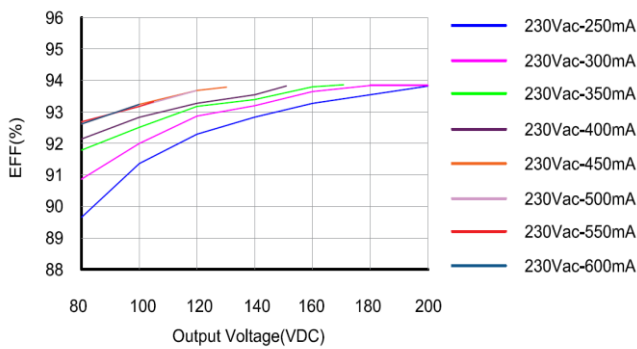

**Power Factor Characteristics**

