


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2015.05.17	钟建虾

NOTES:

CURRENT RATING:5A AC/DC.
 VOLTAGE RATING:250V AC/DC
 TEMPERATURE RANGE:-40°C~+105°C.
 CONTACT RESISTANCE:30mΩ Max.
 INSULATION RESISTANCE:1000MΩ Min.
 WITHSTANDING VOLTAGE: 1500V AC/MINUTE.
 MATERIAL:Nlyon 66.UL94V-0.

No.of Pin/Row	DIMENSIONS	
	A	B
01	--	6.65
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

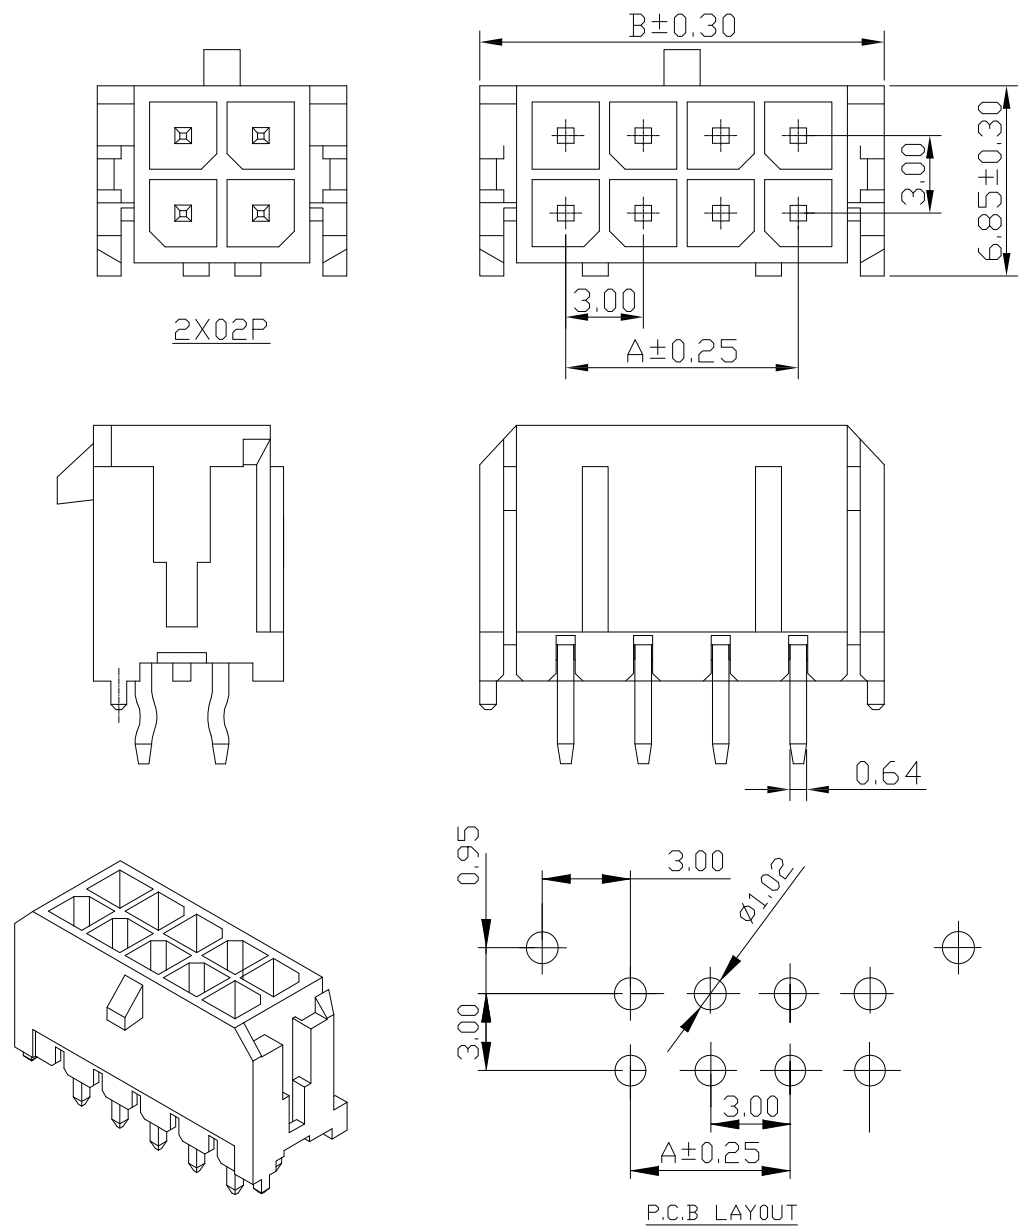

Ordering Information

G WZA203-XX XX B 805 E X B X

No. of Pins per Row 01~12 Standard Plating 01=Tin Color 1=Black 2=White Standard Packing N=PE Bag

Selective Plating 02=Gold Flash 22=Matte Tin

Greenconn
 Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A	UNIT. mm	SCALE. 1:1
--------	----------	------------

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X'±3.0'	X±0.35
.X'±2.0'	.X±0.30
.XX'±1.5'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED: 钟建虾
 CHECKED:
 APPROVED:

DATE: 2015.05.17
 DATE:
 DATE:

DWG. NO. GWZA203-CB805
 PART NO. GWZA203-XXXXB805EXBX

TITLE. 3.0mm pitch 180° wafer