


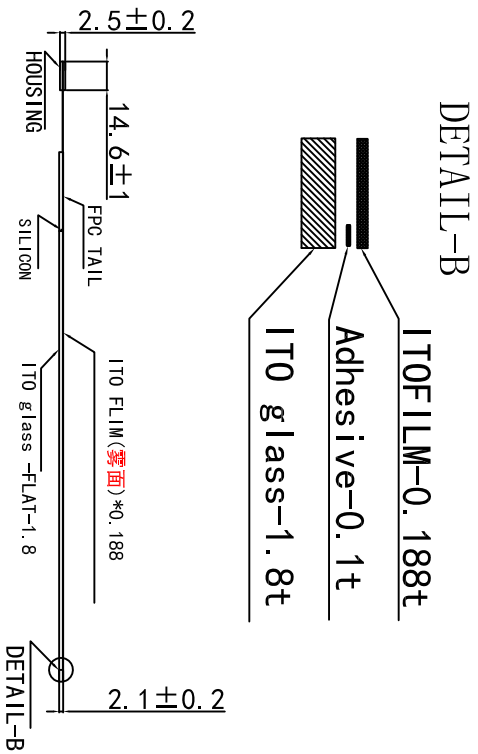


标记 (mark)	修改内容 (revised contents)	签名 (signature)	日期 (Date)
A版	首次发行		2016-11-28

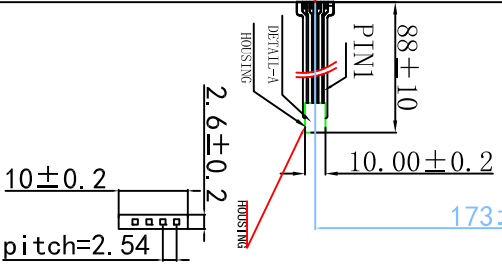

CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	Y2
2	X2
3	Y1
4	X1

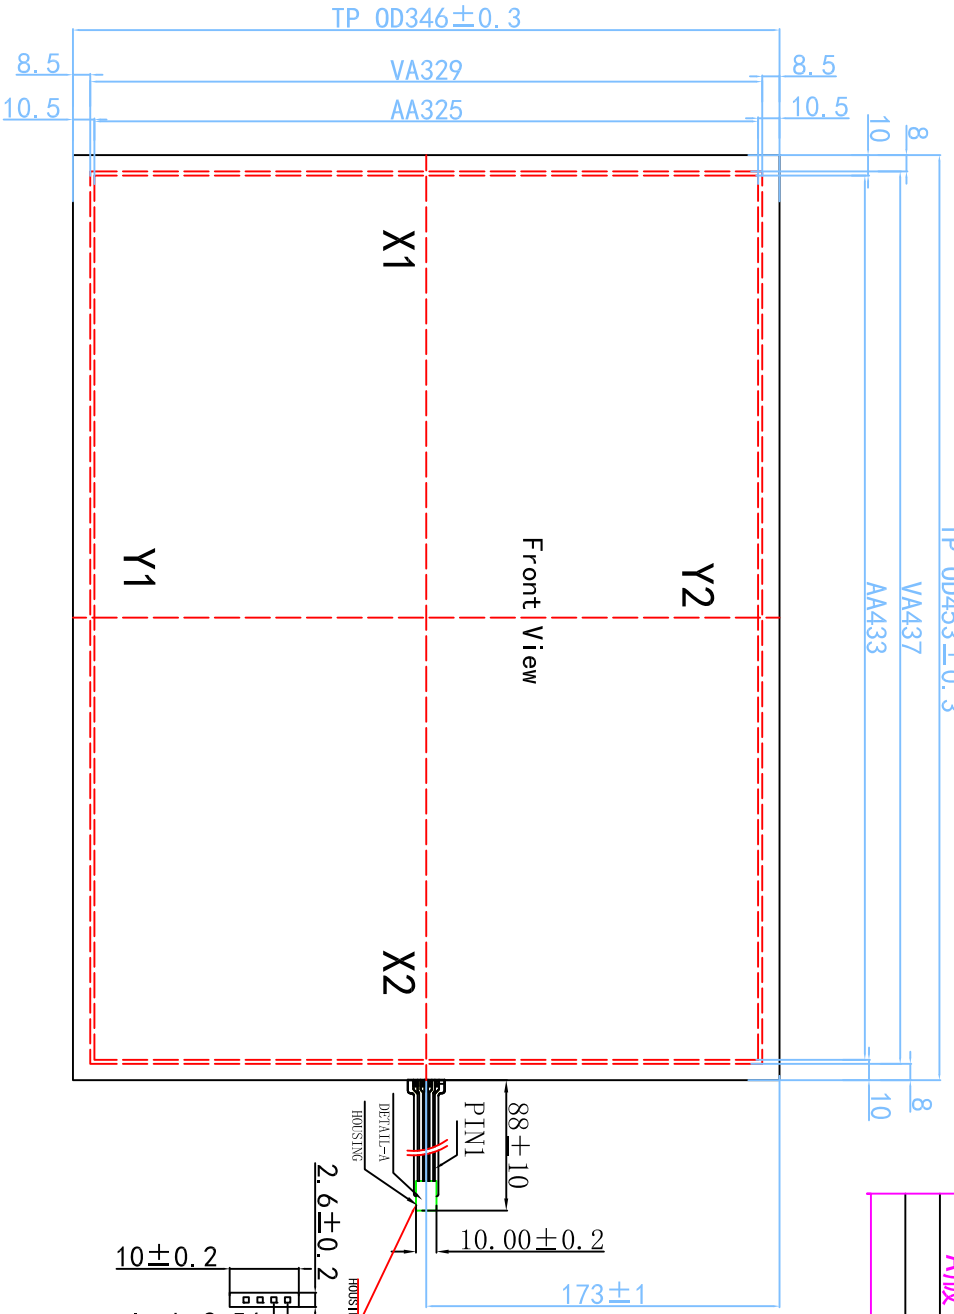

Instruction:

- Type: Film to Glass+FPC+FPC-TS-F4004S0835-A, 固定条贴TS004
- Operating Voltage: 3~7V
- Response Time: ≤15ms
- Storage Temperature: -20°C~+50°C/20%~80%
- Operation Temperature/Humidity: -10°C~+50°C/20%~80%
- Hitting Life: >1,000,000 Times, 100gf Force
- Writting Life >100,000 Times, 100gf Force
- Connect Material: FPC
- Film Thickness: 0.188mm
- Glass Thickness: 1.8mm
- Light Transmission: 78%±8%
- Force: 100g or less
- Linearity: ≤1.5. %
- Insulation: ≥20MΩ
- Surface Hardness ≥3H (pencil I)
- Unmarked tolerance as ±0.5

RVE 版本	A	DESIGNED BY	CHECKED BY	VIEW:	
TITLE:	TS213A4B001-A	DESIGN	CHECKED BY	投影方式	
产品编号			审核		
客户编号			批准		
Unit	mm			Scale	1:1
Date	2016-11-18				