
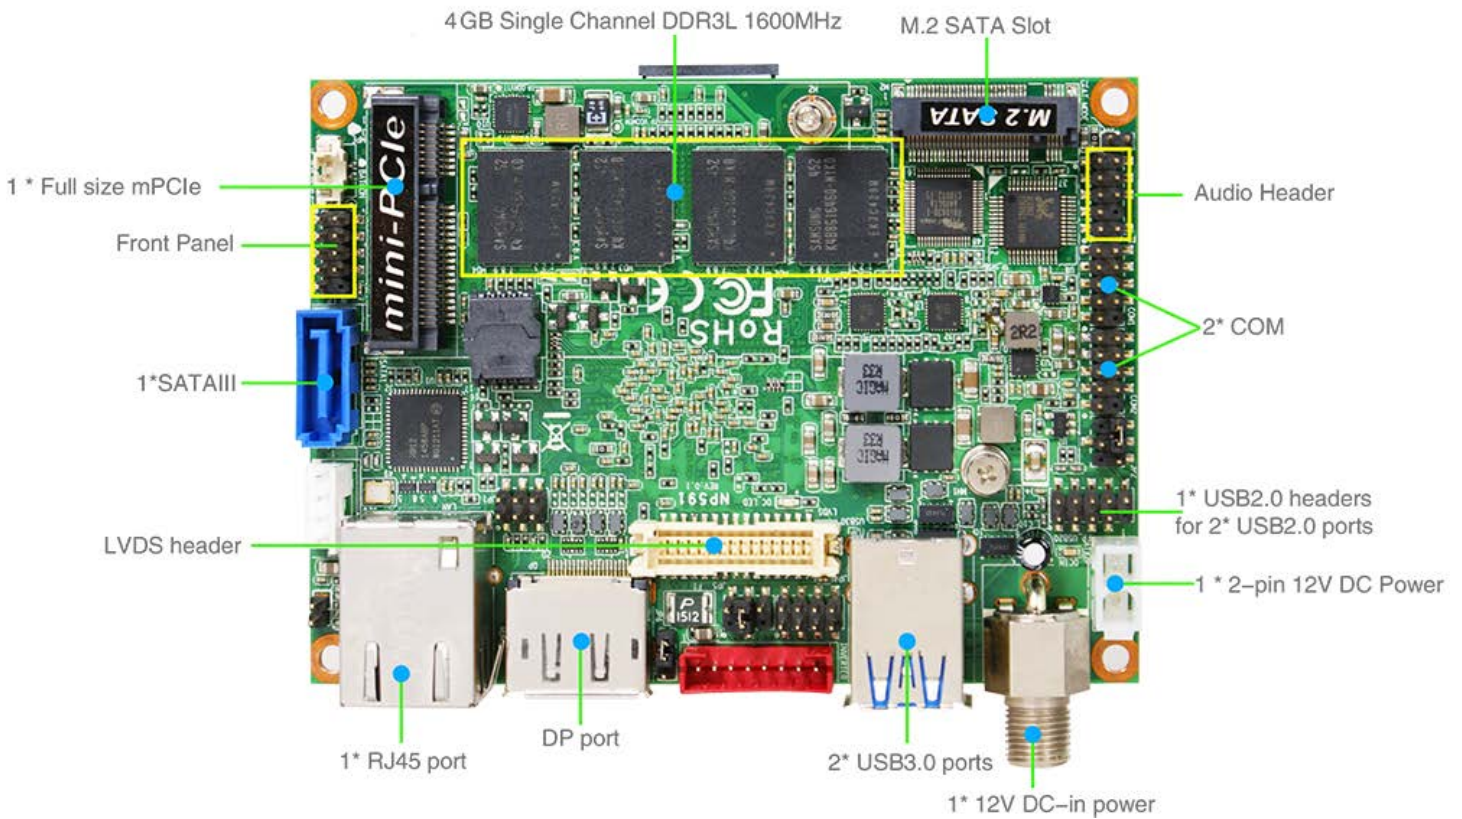


1. Intel® Braswell -N3160 2.24GHz
2. Support DDR3L 1600MHz Single Channel, Onboard 4GB System Memory (Option 2GB)
3. 1 * SATAIII (6Gb/s), 1 * M.2
4. Integrated Realtek ALC662VD HD Audio CODEC with 2-CH
5. 1 * 24-bits Dual Channel LVDS header
6. Support DP1.1 Output (Max. resolution 2560*1600@60Hz)
7. Support 1 * Intel® i211AT GbE LAN
8. 100 * 72 mm Pico Form Factor

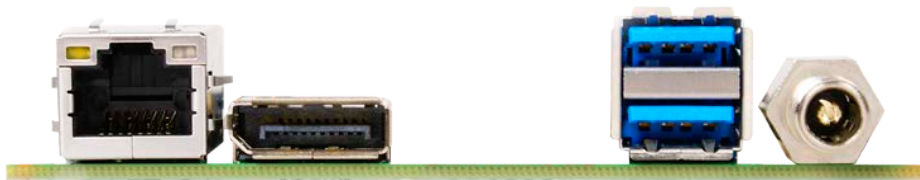

Product Specifications	
Form Factor	
Dimensions	- Pico (100 * 72 mm)
Processor System	
CPU	- Intel® Braswell - N3160 Processor
Core Number	- 4
Max Speed	- 2.24GHz
L2 Cache	- 2M
Chipset	- SoC
BIOS	- AMI 64MB flash ROM
Expansion Slot	
PCI	- 0
Mini-PCIe	- 1 (full size)
mSATA	- 0
PCIe	- 0
M.2	- 1 (M-key, 2242 SATA Only)
CF Card Socket	- 0
Memory	
Technology	- Single Channel DDR3L 1600MHz
Max.	- 4GB default
Socket	- 0 (Memory Onboard)
Graphics	
Controller	- Intel® HD Graphics
VRAM	- Shared Memory
VGA	- 0
LVDS	- 1 * Onboard 24-bits Dual channel connector
HDMI	- 0
DVI-I	- 0
DisplayPort	- 1 (Max resolution 2560*1600@60Hz)
MultiDisplay	- Yes (Dual Display)
Ethernet	
Ethernet	- 10/100/1000 Mbps
Controller	- GbE LAN: Intel i211AT
Connector	- 1 * RJ 45
SATA	
Max Data Transfer Rate	- 1* SATAIII (6.0Gb/s)
Rear I/O	

VGA	- 0
DVI-I	- 0
HDMI	- 0
DisplayPort	- 1
Ethernet	- 1
USB	- 2 (2* USB 3.0)
Audio	- 0
Serial	- 0
eSATA	- 0
PS2	- 0
DC-input	- 1
Internal Connector	
USB	- 2 (2 * USB 2.0 via 10pin header)
PS2	- 0
LVDS / inverter	- 1
VGA	- 0
Serial	- 2 (1 * RS232/422/485 with 5V/12V selectable header, 1 * RS232)
SATA	- 1 * SATAIII (6.0Gb/s)
mPCIe	- 1 (full size)
Parallel	- 0
M.2	- 1 (M-key, 2242 SATA Only)
CIR	- 0
GPIO 8-bit	- 0
Chassis intrusion	- 0
Audio Header	- 1 (Line out & MIC)
Watchdog Timer	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 0,1,2...255sec/min
Power Requirements	
Input PWR	- +12V DC-in (2-pin PWR Con)
Power On	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Certifications	
Certifications	- CE, FCC, RoHS, REACH
Environment	
Temperature	- Operating: 0°C– 40°C
	- Storage: -20°C– 85°C

- For further information please visit the website at <http://www.jetway.com.tw>
- The Specification may be changed without further notice.

Product Accessories			
Parts	Manual	CD Driver	SATA cable
P/N	G03-NP93-F	G02-DVD20-A5-WF	G01-SATA3-BL-F
Q'ty	1	1	1
Picture			
Parts	SATA Power cable	COM cable	
P/N	G01-PW4PS-2S-32F	G01-COM-H2M30-F	
Q'ty	1	1	
Picture			

Product Application				
V	Panel PC (工業平板電腦)	V	Medical (醫療)	POE/Surveillance (安防監控)
V	Commercial (商業應用)	V	POS/KIOSK (零售系統)	Power (電力系統)
V	Banking (銀行金控)	V	Industrial Automation (工業自動化)	Mobile (移動系統)
	Military (軍方應用)		Transportation (交通)	Storage(Nas) (存儲系統)
V	Digital Signage (數字標牌)		Telecom (通訊)	V I.O.T(物聯網)
V	Gaming (博奕)		Networking (網絡應用)	V AIO(一体机)