




Front view

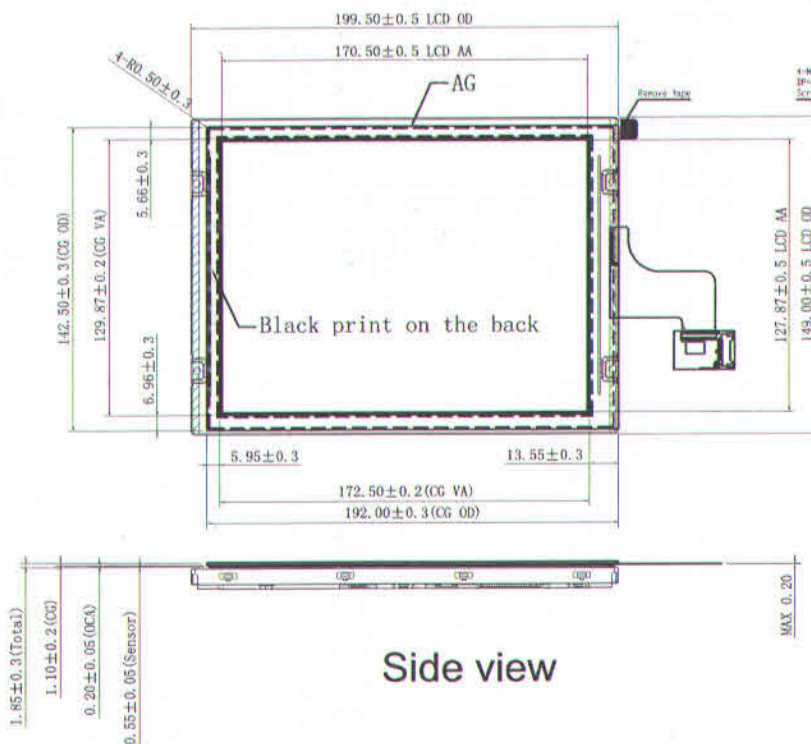

Side view

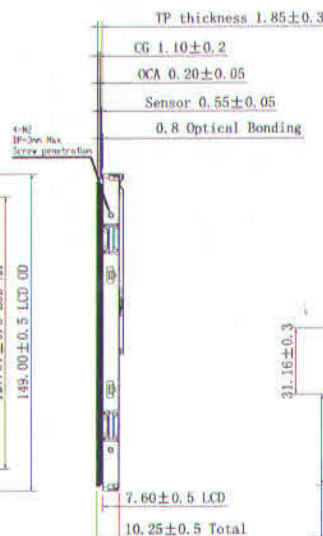


Back view

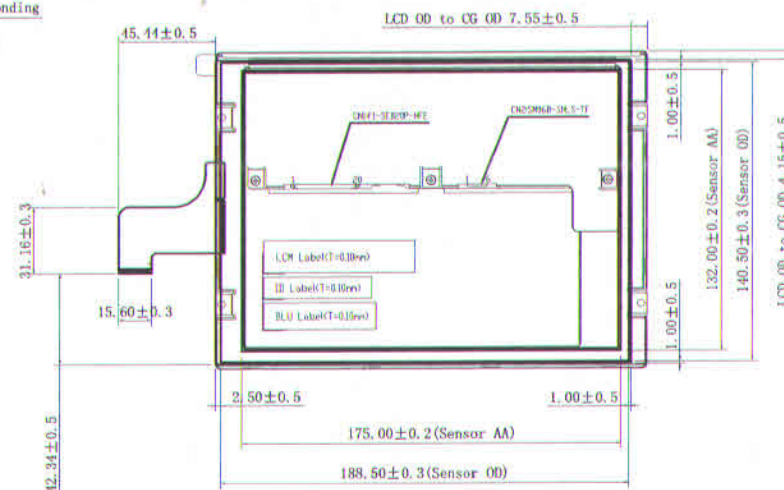

Side view

Control Board

EE80H321829-CABS-A001

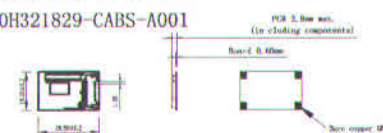

Connector Pin Define	
Pin1	VDD 5V
Pin2	D+
Pin3	D-
Pin4	GND
Pin5	RST
Pin6	INT
Pin7	SDA
Pin8	SCL

Technical Spec:

- 1.COVER LENS : Soda lime
- 2.Chemical strength glass,surface hardness $\geq 6H$
- 3.Transmittance $\geq 85\%$
- 4.IC :EETI EXC80H32 10 points touch.
- 5.Interface : USB/I2C
- 6.Common tolerance $\pm 0.3mm$
- 7.Follow RoHS standard
- 8.Operating Temperature:-20°C~+70°C
Storage Temperature:-30°C~+80°C

1084XGA03 - Symmetron

A084004C-B0-D00+P0840XGF1MA00-EE80H321829		DESIGN	UNIT	mm
		CHECK	DATE	2022.09.06
CUSTOMER P/N		APPROVED	VERSION	V1.1
SCALE	VIEW	SHEET	 齊鏡科技股份有限公司	
1:1		1 of 1		