




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2018.01.02	李全樂

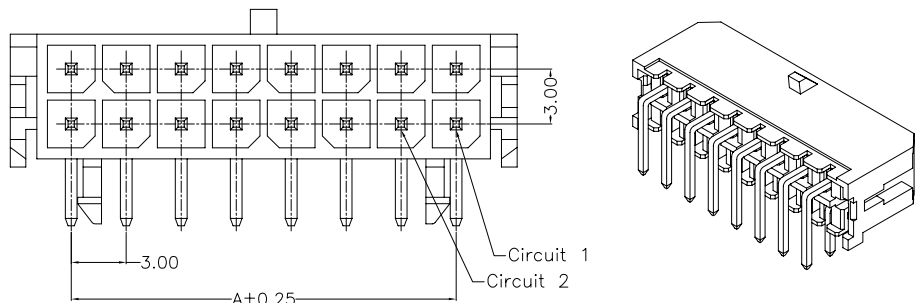

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
01	---	6.65	07	18.00	24.65
02	3.00	9.65	08	21.00	27.65
03	6.00	12.65	09	24.00	30.65
04	9.00	15.65	10	27.00	33.65
05	12.00	18.65	11	30.00	36.65
06	15.00	21.65	12	33.00	39.65

### Specifications :

Voltage rating: 250V AC / DC  
 Current rating: 5A AC / DC  
 Withstanding voltage: 1000V AC/minute  
 Temperature range: -25°C~+85°C  
 Insulation resistance: ≥1000MΩ  
 Contact resistance: ≤10mΩ  
 After environmental testing: ≤20mΩ

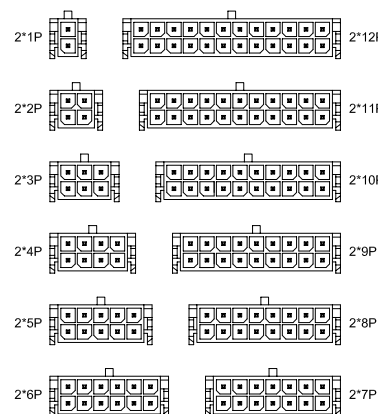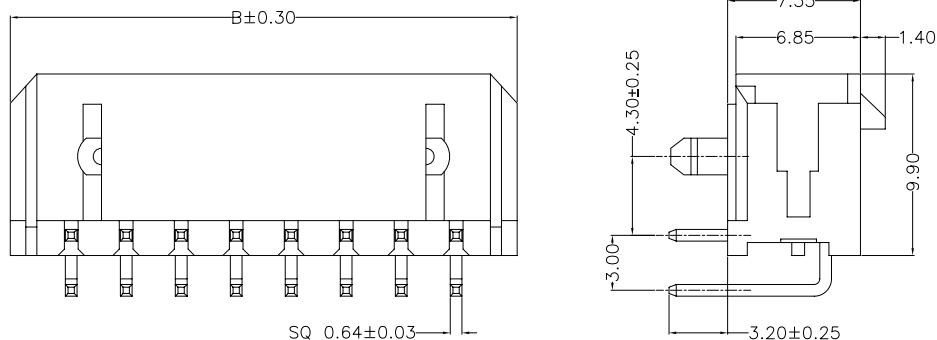

Scale 1:3

Series No.

Category: wafer


Welding Board Angle: 90°

Welding Way: DIP

Material: PBT 94V-0

Material(Pin): Brass

All materials must meet Greenconn requirement for environment protection.

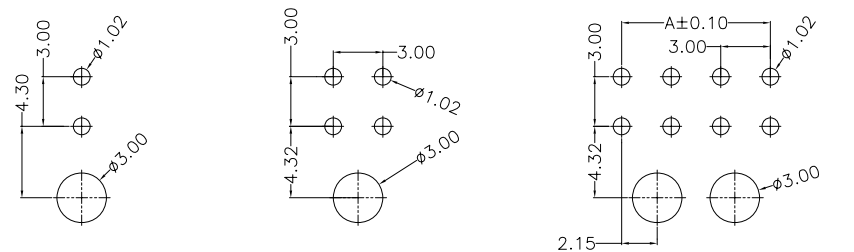


1P P.C.B LAYOUT

2P~3P P.C.B LAYOUT

4P~12P P.C.B LAYOUT

### Ordering Information

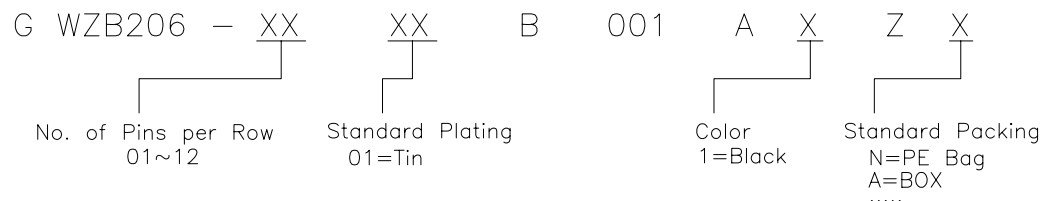

格稜股份有限公司  
**Greenconn Corporation**

GENERAL TOLERANCE	
X.*±/	X.±/
.X*±/	.X±0.30
.XX*±/	.XX±0.20
.XXX*±/	.XXX±0.10

DESIGN: 李全樂	DATE: 2018.01.02
CHECKED: 林泽云	DATE: 2018.01.02
AUDITED: LINK	DATE: 2018.01.02

DWG. NO.	GWZB206-CB1AZ
PART NO.	
GWZB206-XXXXB001AXZX	

TITLE.
3.00mm Crimp Style Connectors

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1