


Ver.	Modify No.	Details	Area	P. I. C	Date
V1.0	A1	New Description	ED	W. D	2026.03.16

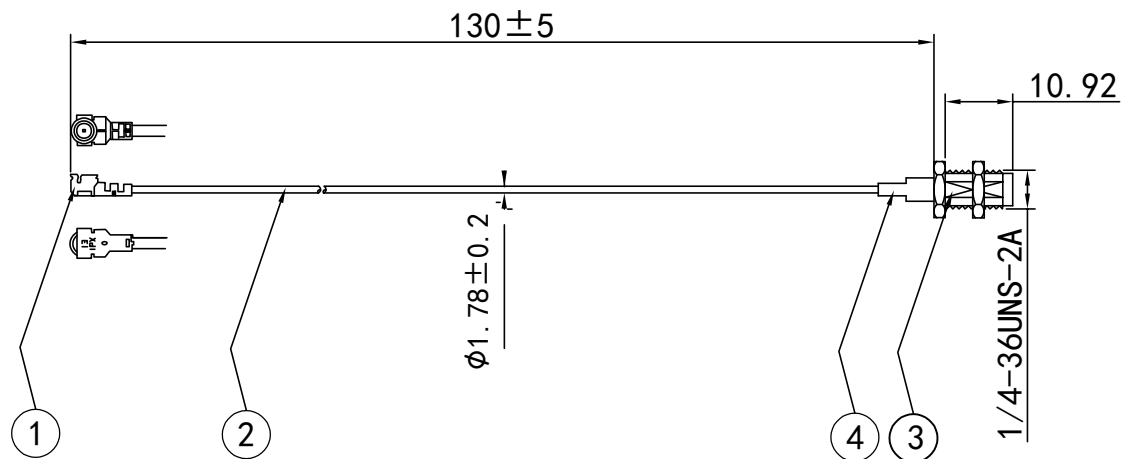

长度	Length	130 ± 5mm
最小直径	Min diameter	Ø1.78 ± 0.2mm
接口	Connector	RP SMA/IPEX
Temperature		-40°C ~ +90°C

CHARACTERISTIC:

- (1).The cable shall be 100% electric test.
- (2).DC Test:300V.
- (3).Insulation resistance: 10M ohm/MIN
- (4).Conductance resistance: 2 ohm/Max
- (5).Wire color cannot be changed at will.

Part No.		CAB U. FL-F-RPSMA-F RG-178U-130			
Product Name: RF Cable		Drawing No.			
		Project Code.			
Business Unit: SNT-CKP		Period Mark	View Angle	Ratio	
		A		1:1	
BOM Code		Page 1		Total 1 Page	
Product Series		Cable Assembly		思诺泰科创电子(苏州)有限公司 SINOTELECTRONICS INC.	

4	Heat shrinkable tube	Ø2.5*20MM	1	PCS
3	Connector	RP SMA Female	1	PCS
2	Wire	RG-178U Black line	/	MM
1	Connector	IPEX-1	1	PCS
NO.	NAME:	SPEC:	QTY	Remark

All material used conform to RoHS standards