
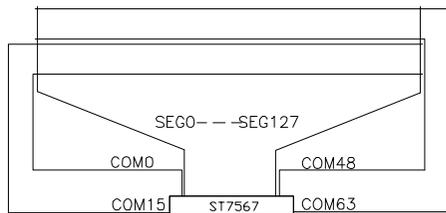


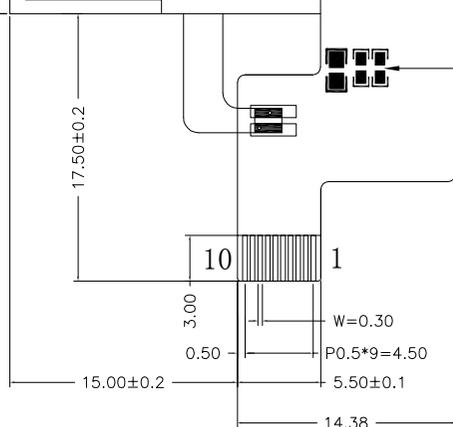
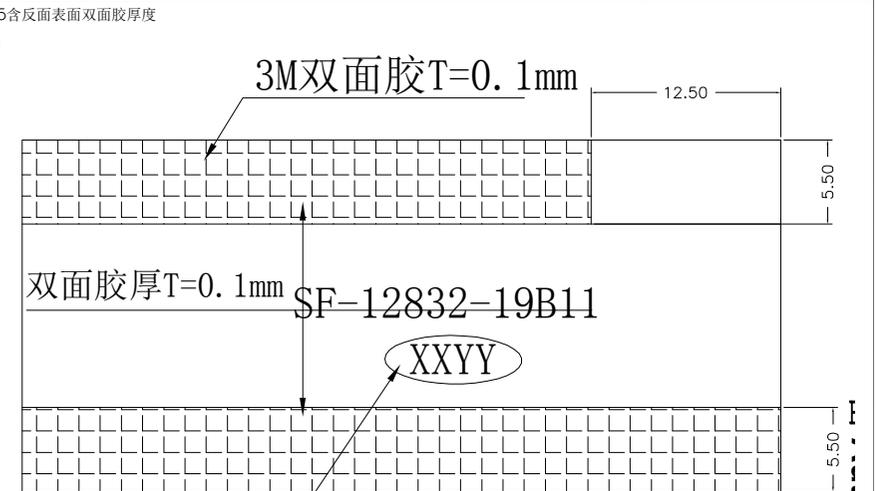


SYM	REV	DESCRIPTION	DATE
	01	First issue	Jun-09-2017
	02	去掉背光背部双面胶	Apr-26-2018
	03	增加背胶, 更改丝印	Mar-08-2018

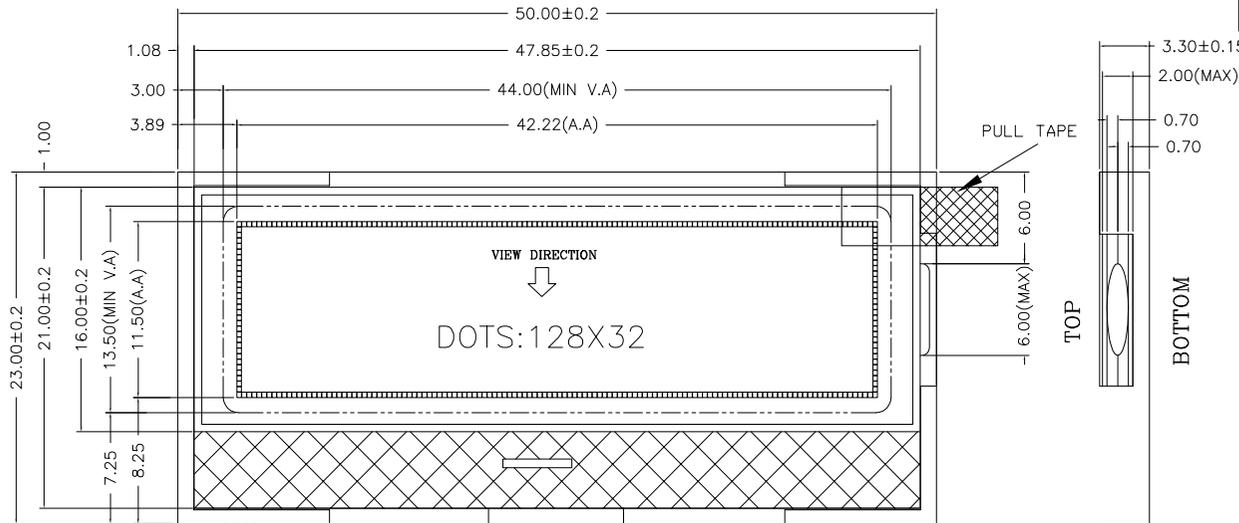



LCD上设计静电环并且接VSS

反面喷码

YY:生产年份
XX:生产周数

fpc pin def.

PIN	NAME
1	CS1
2	RES
3	AO
4	SCK
5	SDA
6	VDD
7	VSS
8	VG
9	A
10	K

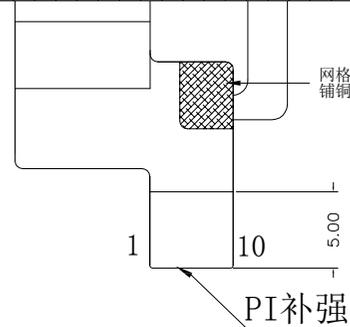

3 PCS WHITE LEDS/3.0V/45mA

NOTES:

1. DISPLAY TYPE: FSTN/POSITIVE
2. OPERATING VOLTAGE: VDD=3.3
3. DRIVE MODE: 1/33D, 1/6B
4. VIEWING DIRECTION: 12:00
5. POLARIZER TYPE: TRANSMISSIVE
6. OPERATING TEMPERATURE: -10°C~60°C
7. STORAGE TEMPERATURE: -20°C~70°C
8. CONNECTOR: COG/SC5250
9. CUSTOMER No.:

TITLE: CD			
Drw: WPY	MODEL: SF-12832-19B11	JWC NO: C-04	
Chk:	UNIT: mm		GENERAL TOL: ±0.2
Apv:	SCALE:		SHEET NO: 1/1