

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2012.10.27	張佳黛
02	△02	变更产品高度	2018.08.01	李全榮
03	△03	供应商改模	2020.10.06	钟建虾

Specifications







- △ Current Rating: 3.0Amp
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 20mΩ max
- Dielectric Withstanding: 500VAC
- Operating Temperature: -40°C to +105°C
- Materials
- Contact Material: Brass.
- Insulation Material: Thermoplastic, UL94V-0 PBT or the equivalent material
- All materials must meet Greenconn requirement for environment protection

**Ordering Information**

G PHA220 - XX XX A003 A 1 B X-1B

No. of Pins per Row	Standard Plating	Standard Packing
5, 6, 7, 8, 10, 12, 13, 15	02=Gold Flash	B=Tray
17, 20, 25, 30, 32	Selective plating	Selective Packing
	01=Tin	A=Box

No. of PINS	Dimension Information		
	A	B	C
2*5	31.90	10.16	21.76
2*6	34.44	12.70	24.30
2*7	36.98	15.24	26.84
2*8	39.52	17.78	29.38
2*10	44.60	22.86	34.46
2*12	49.68	27.94	39.54
2*13	52.22	30.48	42.08
2*15	57.30	35.56	47.16
2*17	62.38	40.64	52.24
2*20	70.00	48.26	59.86
2*25	82.70	60.96	72.56
2*30	95.40	73.66	85.26
2*32	100.48	78.74	90.34

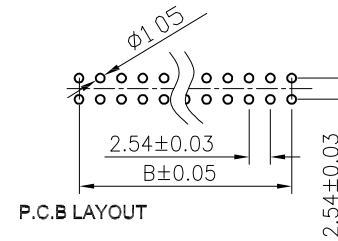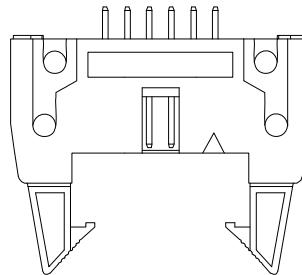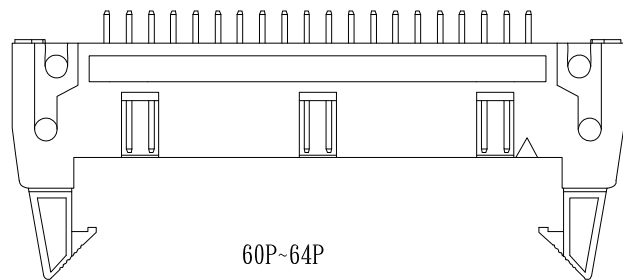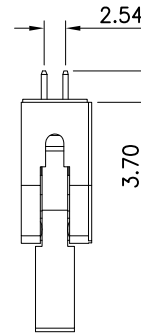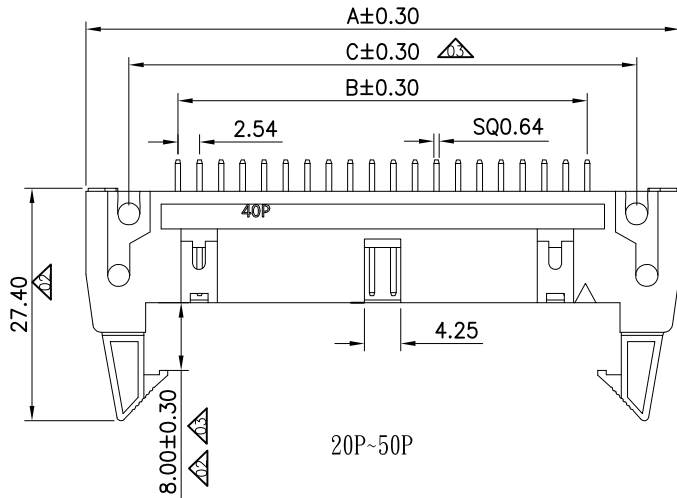

格菱股份有限公司  
**Greenconn Corporation**

GENERAL TOLERANCE

X.* ± 5.0°	X. ± /
.X° ± 3.0°	.X ± 0.30
.XX* ± 2.0°	.XX ± 0.20
.XXX* ± 1.0°	.XXX ± 0.10

DESIGNED: 钟建虾

DATE: 2020.10.06

CHECKED: 方秋香

DATE: 2020.10.06

APPROVED: 方秋香

DATE: 2020.10.06

DWG. NO.

GPHA220-CA3AB

PART NO.

GPHA220-XXXXA003AXBX-1B

TITLE.

PITCH 2.54mm  
SHROUDED HEADER  
STRAIGHT DIP TYPE

REV.	UNIT.	SCALE.	PAGE.	Symbol
03	mm	1:1	1/1	⊕