

SPECIFICATION

Current Rating: 0.5 AMP
 Voltage Rating : 50V DC Max. ΔB
 Insulation Resistance: 1000M Ω Min.
 Contact Resistance: 100m Ω Max.
 Dielectric Voltage: 500V AC for one minute
 Mating Cycles: 5000 Insertions
 Ambient Temperature Range:-20°C to +85°C ΔB
 Storage Temperature Range:-40°C to +70°C

MATERIAL






Housing: Hi-Temp Temperature, UL94V-0, Black
 Terminal: Copper Alloy
 Shell: Stainless

ORDER INFORMATION


5 K M S P - 0 6 G 0 N H L 0 2

No. of Contacts G0:Gold Flash H:T/R W/O Cap

AMTEK 糧德
 2020.12.07
 Released DCC

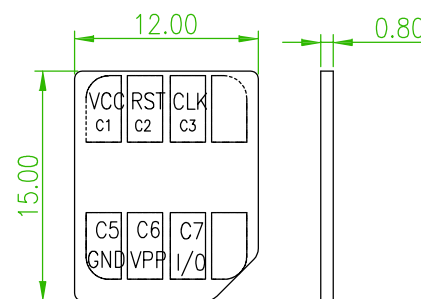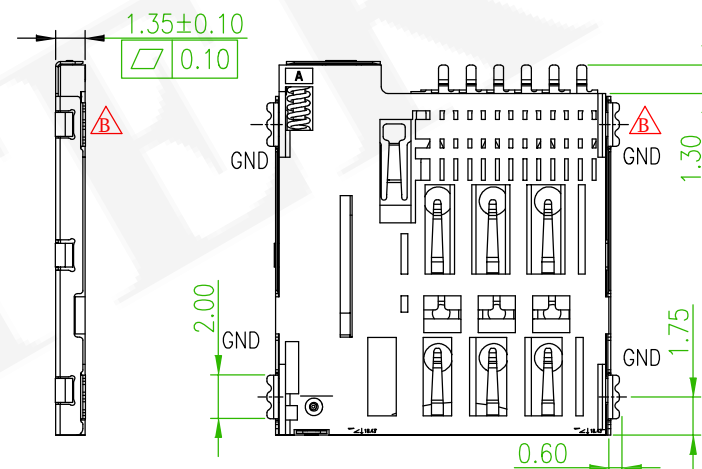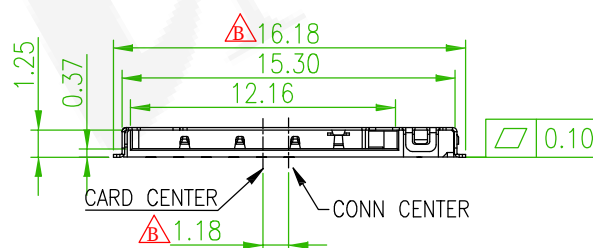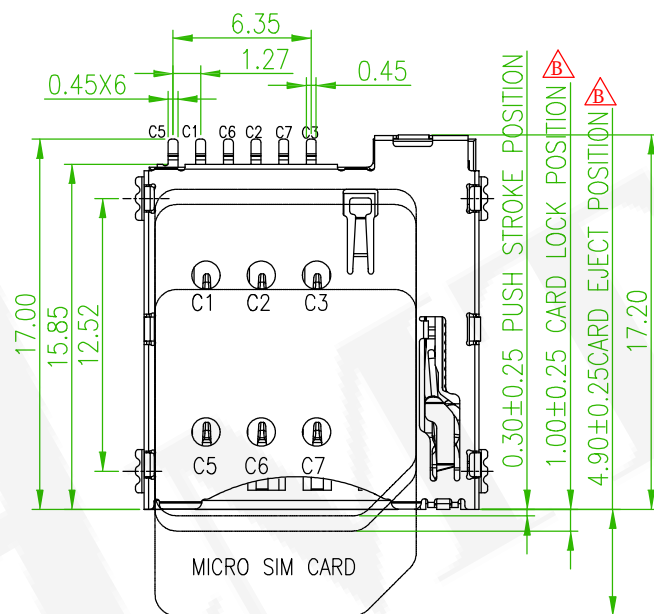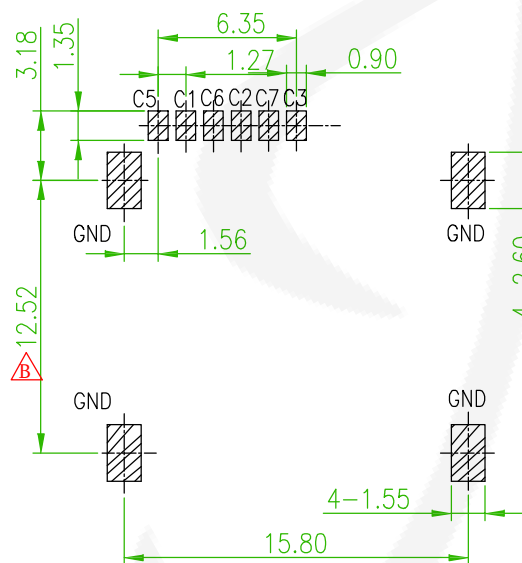

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O



品名 TITLE	MICRO SIM CARD PUSH-PUSH TYPE				頁數 Page	1/1
品號 PART NO.	5KMSP-06G0NHL02				繪圖 DRAWN	David 2019/09/27
圖號 DRAWING NO.	GN195-DV327	版本 REV.	B	核對 CHECKED	Josh 2019/09/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/09/27	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
ΔB x9	QEC NO.: 201111 Revise the drawing	Benson	2020/12/3