

Data sheet

OpDAT LC-D adapter SM (ceramic, blue)

Page 1/4

P/N

15090074-I


EAN 4250184113348

2017-28-06

Illustrations



Dimensional drawing

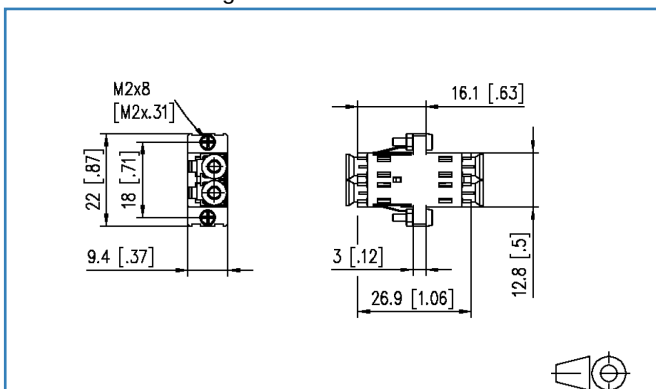

See enlarged drawings at the end of document

Product specification

- LC duplex plastic adapter, SC simplex design with metal clip
- slotted ceramic guide sleeves for single mode and multimode applications
- with transparent dust protection caps for a better visibility during red light test
- high material stability, surface quality and durability
- durability min. 1000 mating cycles with a ceramic guide sleeve
- screws and nuts included
- variants: blue (SM), green (SM APC), heather violet (OM4), aqua (OM3), each variant available in packing units of 1 piece or 50 pieces



Data sheet

Page 2/4

OpDAT LC-D adapter SM (ceramic, blue)

P/N

15090074-I

EAN 4250184113348

2017-28-06

Technical Data

General Data

Fields of application	Structured building cabling, Fiber to the Desk, Data center
Design	Adapter
Transmission technology	Fiber optic
Color	blue
Dimensions	
Dimension (L x W x H)	29.20 x 12.80 x 9.40 mm
Dimension (L x W x H)	1.15 x 0.504 x 0.37 in.
Mode type of the fiber	Single mode
Labeling option	on housing

Connections/interfaces

Connector technology interface 1	LC-D
Connector technology interface 2	LC-D
Number of ports interface 1	1
Number of ports interface 2	1
Number of equipped ports interface 1	1
Number of ports interface 2 equipped	1
Number of ports with dust protection interface 1	1
Number of ports with dust protection interface 2	1

Mechanical characteristics

Cut-out	SC, LC-D, E2000
Connector type	Duplex
Mounting method	latchable and screwable
Life - Number of mating cycles	min. 1000
Position/mounting of latch - standard installation position	top

Materials and material properties

Material - Housing	Plastics
Material - Sleeve	ceramic, slotted



Data sheet

Page 3/4

OpDAT LC-D adapter SM (ceramic, blue)

P/N

15090074-I

EAN 4250184113348

2017-28-06

Technical Data

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	IEC 61754-20
----------------------------------	--------------

Classifications

ETIM 5.0	EC000752
----------	----------

ETIM 6.0	EC000752
----------	----------

Packing details

Type of packaging	1 pc(s) / plastic bag
-------------------	-----------------------

Packaging unit - Weight (gram)	12.00 g
--------------------------------	---------

Packaging unit - Weight (pound)	0.03 lb
---------------------------------	---------



Illustrations

Dimensional drawing

