



Material:

Nylon 66 UL 94V-0,
Color Nature


Ordering Code:

CID9 ** S L 00A
① ② ③ ④ ⑤




- ① Series No.
- ② Contact: 02 to 15
- ③ S= Female
- ④ L= With Locking Latch
- ⑤ Option:
00A= Standard(Color Nature)

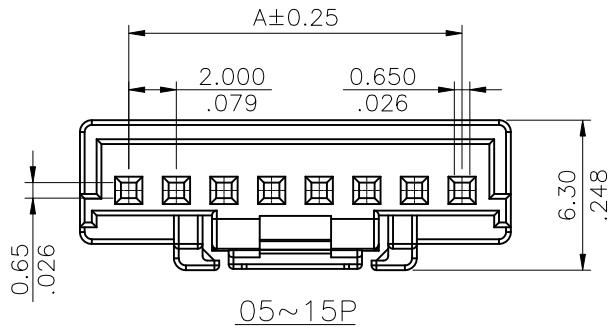

2P




3P,4P

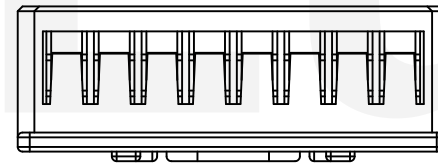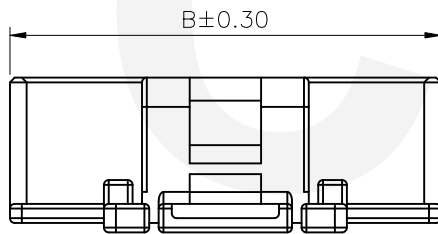

Circuits	Dimension	
	A	B
2	2.00 (.079)	8.00 (.315)
3	4.00 (.157)	8.10 (.319)
4	6.00 (.236)	10.10 (.398)
5	8.00 (.315)	12.10 (.476)
6	10.00 (.394)	14.10 (.555)
7	12.00 (.472)	16.10 (.634)
8	14.00 (.551)	18.10 (.713)
9	16.00 (.630)	20.10 (.791)
10	18.00 (.709)	22.10 (.870)
11	20.00 (.787)	24.10 (.949)
12	22.00 (.866)	26.10 (1.028)
13	24.00 (.945)	28.10 (1.106)
14	26.00 (1.024)	30.10 (1.185)
15	28.00 (1.102)	32.10 (1.264)

Halogen-Free

RoHS compliant



SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE:
4						UNIT: mm / inch	2.50MM(.098") PITCH HOUSING
3				DRAWN BY: Sun	12/25-20'	TOLERANCE UNLESS OTHERWISE SPECIFIED	
2				ENGINEER: Sun	12/25-20'	.X ± 0.30/.012 X' ±	MATERIAL:
1				CHECKED BY: Eisley	12/28-20'	.XX ± 0.20/.008 .X' ±	FINISH:
				APPROVED BY: Eisley	12/28-20'	.XXX ± 0.10/.004 .XX' ±	



瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CID905SA	PART NO.	CID9**SL00A
SCALE	3/1	SHEET	1 OF 1