

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2020.12.04	钟建虾
B	▲	增加操作温度	2021.11.29	钟建虾
C	▲	更新新图纸	2021.12.13	钟建虾

Note:

1.Material:

1.1 Housing: UL94v-0,LCP **Black**

1.2 Contact: C5195 t=0.15mm

1.3 Shell: C2680 t=0.30mm

2.Specification:

2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.

2.2 Dielectric withstanding

voltage: 100 V(ac) for 1 min.









2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 100 MΩ Min.

2.5 Total mating force: 3.57 Kgf Max.

2.6 Total unmating force: 1.0 Kgf Min.

▲ 2.7 Temperature range: -30°C~80°C

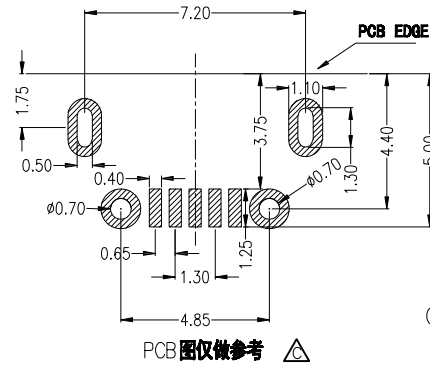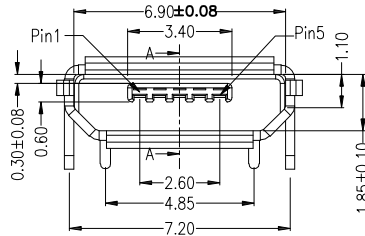

Ordering Information

C UZD192 - 05 XX A 001 C X S X-Y4


Standard Plating
05=Gold Flash/Tin
Selective Plating
01=Tin
02=Gold Flash

Color
1=Black

Standard Packing
D=Tape&Reel



3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±/
.X*±3.0°	.X±0.30
.XX*±2.0°	.XX±0.25
.XXX*±1.0°	.XXX±0.10

DESIGNED: 钟建虾

DATE: 2021.12.13

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUZD192-CA1CS

PART NO.

CUZD192-05XXA001CX SX-Y4

TITLE.

MICRO USB 5S B 四翻全插
(牛角型) 短针

REV. C UNIT. mm SCALE. 1:1