


FEATURES

1. High efficiency up to 84%
2. The leakage current <math>< 2\mu\text{A}</math>
3. Isolation Capacitance as low as 4pF
4. Creepage & Clearance Distance > 5mm
5. Reinforced insulation, Isolation voltage: 5000VAC or 6000VDC
6. Operating ambient temperature range:
7. -40°C to $+105^{\circ}\text{C}$
8. Continuous short circuit protection
9. Meet IEC60601 standard

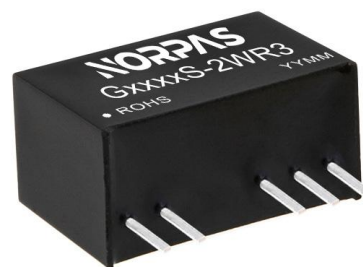

3 years
Warranty

Selection Guide

Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load(μF)* Max.
	Nominal (Range)	Voltage (VDC)	Current (mA) Max./Min.		
G1205S-2WR3	12 (10.8-13.2)	± 5	$\pm 200/\pm 20$	76/80	1000
G1209S-2WR3		± 9	$\pm 111/\pm 11$	78/82	470
G1212S-2WR3		± 12	$\pm 83/\pm 9$	79/83	220
G1215S-2WR3		± 15	$\pm 67/\pm 7$	80/84	220
H1205S-2WR3		5	400/40	76/80	1000
H1209S-2WR3		9	222/22	78/82	680
H1212S-2WR3		12	167/17	80/84	470
H1215S-2WR3		15	133/14	80/84	470
G1505S-2WR3	15 (13.5-16.5)	± 5	$\pm 200/\pm 20$	74/78	1000
G1509S-2WR3		± 9	$\pm 111/\pm 11$	76/80	470
G1515S-2WR3		± 15	$\pm 67/\pm 7$	76/80	220
H1505S-2WR3		5	400/40	76/80	1000
H1515S-2WR3		15	133/14	79/83	470
G2405S-2WR3	24 (21.6-26.4)	± 5	$\pm 200/\pm 20$	75/79	1000
G2409S-2WR3		± 9	$\pm 111/\pm 11$	77/81	470
G2412S-2WR3		± 12	$\pm 83/\pm 9$	78/82	220
G2415S-2WR3		± 15	$\pm 67/\pm 7$	77/81	220
H2405S-2WR3		5	400/40	75/79	2200
H2409S-2WR3		9	222/22	77/81	680
H2412S-2WR3		12	167/17	78/82	470
H2415S-2WR3		15	133/14	80/84	470
H2424S-2WR3		24	83/9	80/84	220

Note: *The capacitive loads of positive and negative outputs are identical.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load/no-load)	12V input	–	210/15	220/–	mA
	15V input	–	167/15	176/–	
	24V input	–	106/15	111/–	
Surge Voltage (1sec. max.)	12V input	-0.7	–	18	VDC
	15V input	-0.7	–	21	
	24V input	-0.7	–	30	
Reflected Ripple Current*		–	200	–	mA
Input Filter		Capacitance filter			
Hot Plug		Unavailable			

Note: * Refer to DC-DC Converter Application notes for detailed description of reflected ripple current test method.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Voltage Accuracy		See output regulation curve(Fig. 1)				
Linear Regulation	Input voltage change: ±1%	–	–	1.2	–	
Load Regulation	10%-100% load	5V output	–	–	20	%
		Other output	–	–	15	
Ripple & Noise*	20MHz bandwidth	5V output	–	100	150	mVp-p
		Other output	–	80	120	
Temperature Coefficient	100% full load	–	±0.02	–	%/°C	
Short Circuit Protection		Continuous, self-recovery				

Note: *The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output, Test for 1 minute, the leakage current < 1mA	5000	--	–	VAC
		6000	--	–	VDC
Patient Leakage Current*	250VAC, 50/60Hz	–	--	2	µA
Insulation Resistance	Input-output resistance at 500VDC	1000	--	–	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	–	4	–	pF
Operating Temperature	Derating when operating temperature ≥ 85°C (see Fig. 2)	-40	--	+105	°C
Storage Temperature		-55	--	+125	
Case Temperature Rise	Ta=25°C	–	25	–	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	–	--	300	
Storage Humidity	Non-condensing	5	--	95	%RH
Switching Frequency	100% load, nominal input voltage	–	200	–	kHz
MTBF	MIL-HDBK-217F@25°C	19360	--	–	k hours
Creepage & Clearance Distance		5	--	–	mm

Note: * Leakage current and reinforced insulation is based on 250 VAC, 50/60 Hz system input voltage.

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94V-0)
Dimensions	19.50 x 9.80 x 12.50 mm
Weight	4.0g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	Others	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit) EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 4 for recommended circuit)
		G15_S-2WR3, G24_S-2WR3	CISPR32/EN55032 CLASS A (see Fig. 4 for recommended circuit) EN60601-1-2/CISPR 11 GROUP1 CLASS A (see Fig. 4 for recommended circuit)
	RE	Others	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit) EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 4 for recommended circuit)
		G15_S-2WR3, G24_S-2WR3	CISPR32/EN55032 CLASS A (see Fig. 4 for recommended circuit) EN60601-1-2/CISPR 11 GROUP1 CLASS A (see Fig. 4 for recommended circuit)
Immunity	ESD	EN60601-1-2 (IEC/EN61000-4-2) Air ±15kV, Contact ±8kV perf. Criteria B	

Typical Characteristic Curves

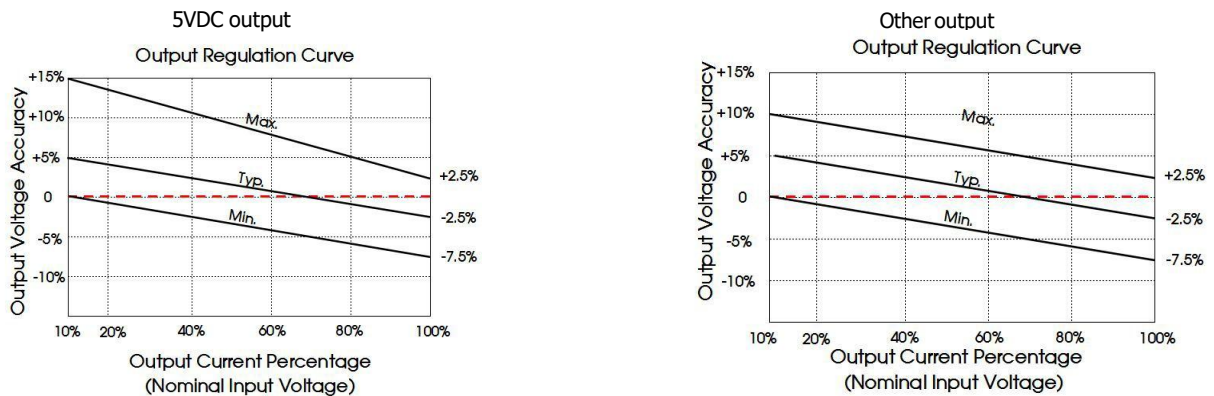


Fig. 1 Temperature Derating Curve

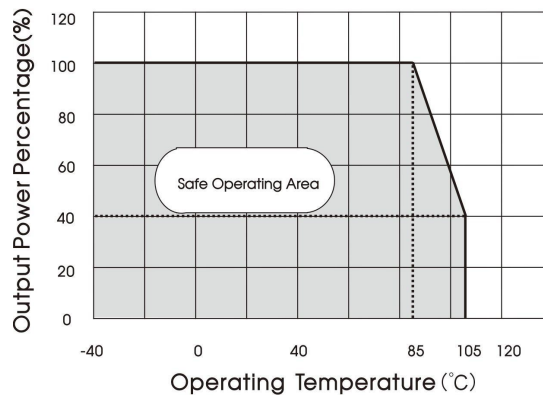


Fig. 2


Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3. Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat

Single



Dual




Fig. 3


Table 1: Recommended input and output capacitor values

Vin	Cin	Single Vout	Cout	Dual Vout	Cout
12VDC	10 μ F/25V	5VDC	10 μ F/16V	–	–
15VDC	4.7 μ F/25V	9VDC	10 μ F/16V	$\pm 5/\pm 9$ VDC	4.7 μ F/16V
24VDC	2.2 μ F/50V	12VDC	2.2 μ F/25V	$\pm 12/\pm 15$ VDC	1 μ F/25V
–	–	15VDC	1 μ F/25V	–	–
–	–	24VDC	0.47 μ F/50V	–	–

2. EMC compliance circuit

EMC recommended circuit value table (Table 2)

G15_S-2WR3, G24_S-2WR3

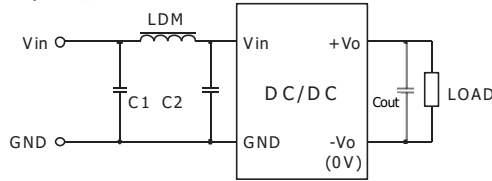

12/15/24V input

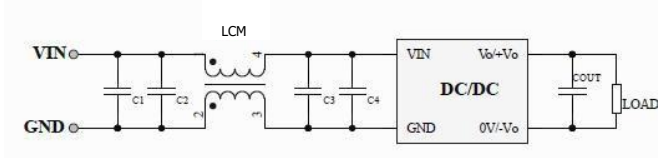


Fig. 4


Input voltage		G15_S-2WR3, G24_S-2WR3
Emissions	C1/C2	4.7 μ F /50V
	Cout	Refer to the Cout in table 1
	LDM	22 μ H

Input voltage		12/15/24VDC	
Emissions	C1/C2	4.7 μ F /50V	
	C3	H2424S-2WR3	100 μ F /50V
		Other output	4.7 μ F /50V
	C4	H2424S-2WR3	–
		Other output	4.7 μ F /50V
	COUT		Refer to the Cout in table 1
LCM		22 μ H(Nickel zinc inductance)	

3. Minimum Output Load Requirement

For a reliable and efficient operation of the converter, the minimum load should never be less than 10% of the rated output load. If the total required output power is below 10%, a parallel bleeding resistor is required on the output, ensuring that the sum of the power consumption is always maintained at 10% minimum.

Dimensions and Recommended Layout

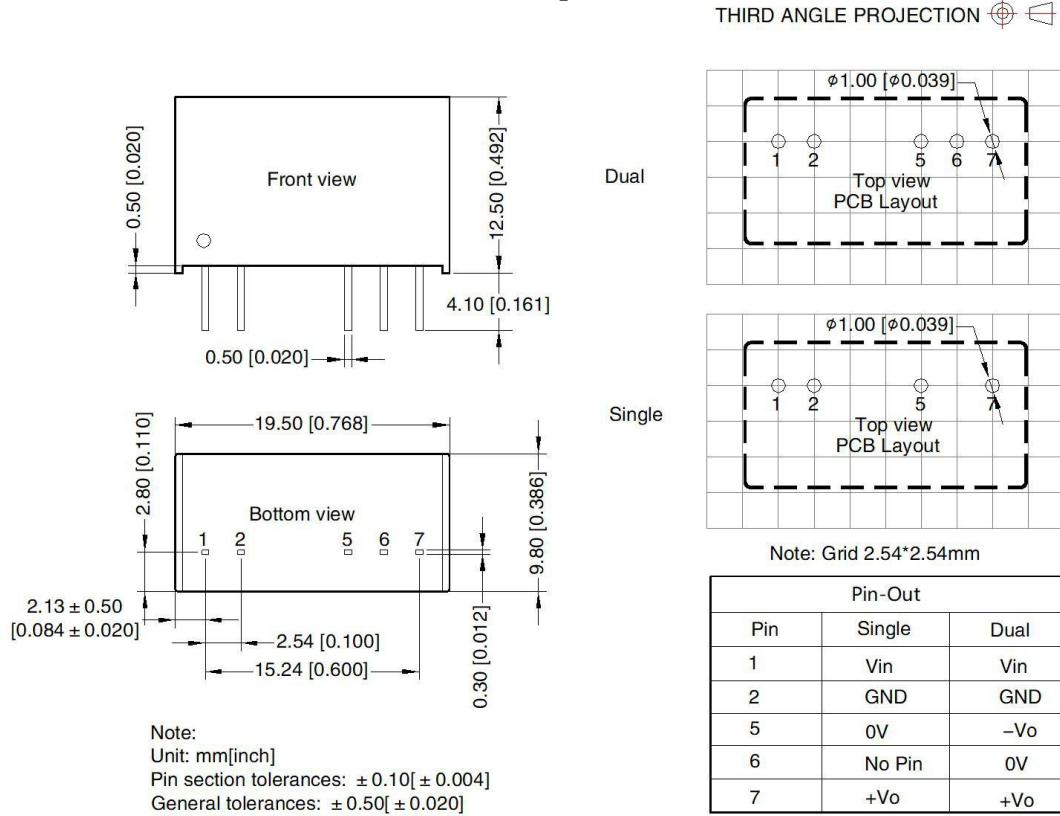

Notes & Instructions

1. If the product works under the minimum required load, it cannot guarantee that the performance of the product complies with all the performance indicators in this manual;
2. The maximum capacitive load is tested under the input voltage range and full load condition;
3. Unless otherwise stated, all indexes in this manual are measured at $T_a=25^\circ\text{C}$, humidity <75%RH, nominal input voltage and rated output load;
4. All index testing methods in this manual are based on the enterprise standards of the company;
5. Our company can provide product customization, specific needs can directly contact our technical staff;