

# TAU1201/TAU1204


Multi-Band GNSS Positioning Module

Standard

## PRODUCT DESCRIPTION

TAU1201/TAU1204 is a high-performance dual-frequency GNSS positioning module, which is based on the state of art CYNOSURE III architecture. It supports GPS, BeiDou, GLONASS, Galileo, IRNSS, and QZSS.

TAU1201/TAU1204 integrates efficient power management architecture, while providing high precision, high sensitivity and low power consumption GNSS solutions which make it suitable for automotive navigation, fleet management, navigation applications on consumer electronics.

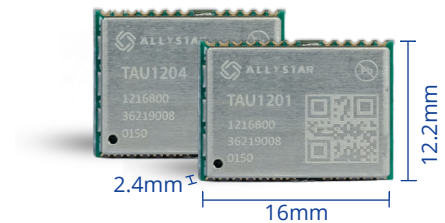


## HIGHLIGHTS

- Supports all civil GNSS systems
- Supports BDS-3 signal: B1C, B2a
- Concurrent reception of L1 and L5 band signals
- Sub-meter position accuracy; superior in multi-path mitigation and lower noise in city valley
- Smart jammer detection and suppression
- Highly integrated module, the best cost-effective high precision solution
- Supports single IRNSS mode (TAU1204)

## APPLICATIONS



Automotive Navigation



Lane-level Navigation



Asset Tracking



Fleet Management

### Product Selector:

Model	GNSS							Features				Interfaces				Accuracy			Grade		
	Band (S/D/T)	GPS	BDS	GLONASS	Galileo	QZSS	IRNSS	Build-in LNA	Data Logging	Programmable(Flash)	D-GNSS	USB	UART	I2C	SPI	Meter	Sub-Meter	Centi-Meter	Standard	Professional	Automotive
TAU1201	D	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
TAU1204	D	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

## GENERAL SPECIFICATIONS

### GNSS Reception

Model	GPS/QZSS					BDS			GLONASS		Galileo			IRNSS		
	L1C/A	L1C	L2C	L5C	L6	B1I	B1C	B2I	B2a	B3I	L1	L2	E1	E5a	E6	L5
TAU1201	•	-	-	•	-	•	• <sup>[1]</sup>	-	•	-	•	-	•	•	-	-
TAU1204	•	-	-	•	-	•	-	-	•	-	-	-	•	•	-	•

\*[1] Supported by specific firmware

### GNSS Engine

Cynosure III GNSS Engine  
40 GNSS tracking channels  
10Hz maximum update rate

### Position Accuracy

GNSS <1m CEP

### Time to First Fix(TTFF)

Hot start 1s  
Cold start 32s

### Sensitivity

Cold Start -148dBm  
Hot Start -155dBm  
Reacquisition -158dBm  
Tracking -162dBm

### Velocity & Time Accuracy

GNSS 0.1m/s CEP  
1PPS 20ns

### Interfaces

USB 1  
UART 1  
SPI 1  
I2C 1

### Antenna

Active antenna  
Passive antenna

### Operation Limit

Velocity 515 m/s  
Altitude 18,000 m

### Safety Supervision

Antenna short circuit and open circuit detection  
Antenna short circuit protection

### Operating Condition

Main voltage 1.8 ~ 3.6V  
Digital I/O voltage 1.8 ~ 3.6V  
Backup voltage 1.8 ~ 3.6V

### Power Consumption

Operating	GPS+QZSS	L1 band: 22mA@3.3V
	GNSS	L1+L5 band: 41mA@3.3V
Standby	12uA	

## ENVIRONMENT DATA

Operation temperature -40°C ~ +85°C  
Storage temperature -40°C ~ +85°C  
Certification RoHS & REACH

## PACKAGE

Packaging 24 PIN LCC  
Dimensions 12.2\*16.0\*2.4mm



Website: [www.allystar.com](http://www.allystar.com)

Email: [info.gnss@allystar.com](mailto:info.gnss@allystar.com)

Headquarters: 5F, Building No. 4, Winlead Intelligent Park, No.3, FaDa road(middle), Bantian Subdistrict, LongGang District, Shenzhen City, Guangdong Province, China.  
Calgary office: Unit 288, 3553 31 Street NW Calgary, Alberta, Canada T2L 2K7

This document contains proprietary technical information which is the property of ALLYSTAR Technology, copying of this document and giving it to others and using or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. ALLYSTAR Technology reserves the right to make changes in its products, specifications and other information at any time without notice. For more documents, please visit [www.allystar.com](http://www.allystar.com).