



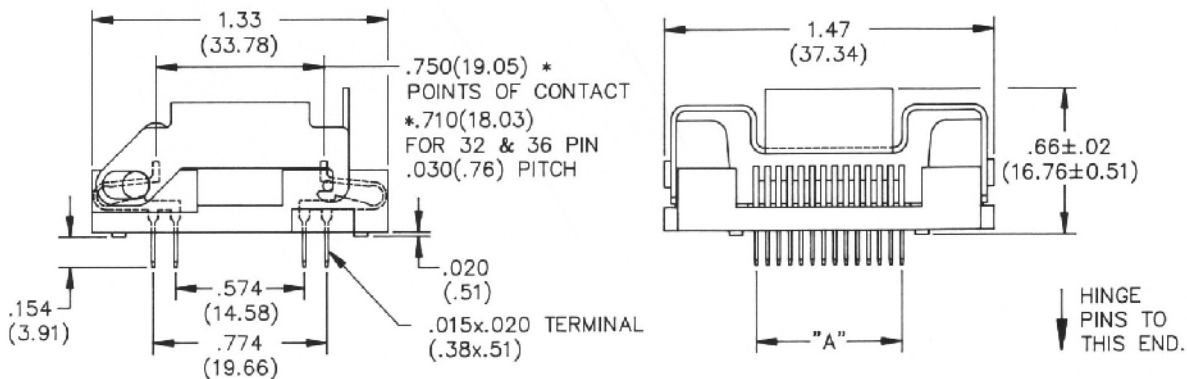

# 628 SERIES FOR 1¼" X 1¼"

## FLATPACK CARRIERS

- Beryllium Copper contacts plated with 30 microinches of select gold
- Latch hold down prevents carrier bowing at elevated temperatures
- Non-corrosive, stainless steel latch that's easy-to-operate
- Reduced-force contacts eliminate damage to device leads
- Smooth, radius-probing contacts
- Long-lasting metal latch and hinge pins
- For temperatures up to 150°C

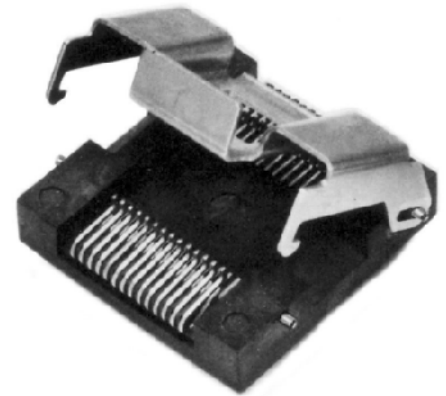

Part Number	Lead Count	Pitch e (mm)	Contact Material	Contact Plating	Dimensions (mm) A
628-0242315 *	24	.050 (1.27)	BeCu	Au/Ni	.550 (13.97)
628-0262315	26	.050 (1.27)	BeCu	Au/Ni	.550 (13.97)
628-0282315	28	.050 (1.27)	BeCu	Au/Ni	.650 (16.51)
628-0322315	32	.050 (1.27)	BeCu	Au/Ni	.750 (19.05)
628-0362315-006	32	.030 (0.76)	BeCu	Au/Ni	.710 (18.03)

\* Depopulated 26 lead