

HR600521

Electrical Specification @25°C

RoHS Compliant (Pb Free)

Isolation: 2500Vac 1mA 60S (Pri to Sec)

Pin1-3 Inductance: 475uH Min. @ 10KHz 100mVac , Ls

Pin1-6 Interwinding capacitance : 17.5pF Typ. @ 100KHz 10mVac,Cs

Pin1-3 DC Resistance: 0.35ohms Max.

Pin6-4 DC Resistance: 0.57ohms Max.


Turns Ratio: Pin6-4 : Pin1-3 = 2CT : 1CT ±2%

Current Rating: 350mAac

E-T Prod(V-uS): 11 Min.

Operating Temperature: -40°C ~ +125°C Including temperature rise

Schematics

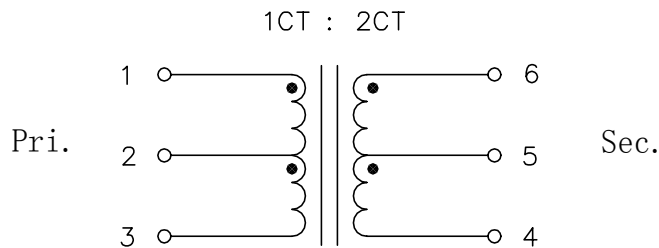

Mechanical Dimensions

