

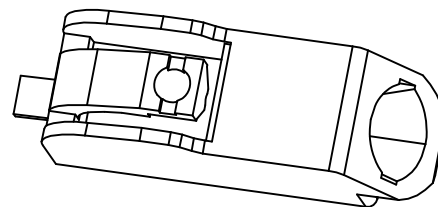

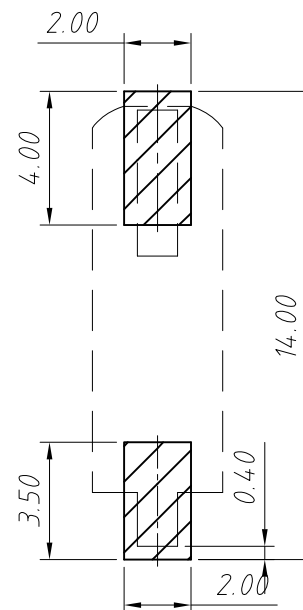


1  
RoHS Compliant

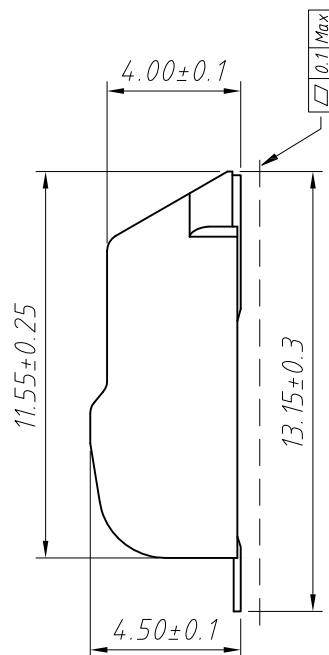


MATERIAL  
Insulator:LCP,UL 94 V-0,Beige  
Contacts:Phosphor Bronze,Tin-plated

Main Specifications  
Poles:01P  
Contact Resistance:≤20mΩ  
Insulation Resistance:≥800MΩ  
Rated Voltage:250V AC DC  
Rated Current:6.0A AC DC  
Withstanding Voltage:800V AC/minute  
Temperature Range: -25 °C ~ +105 °C

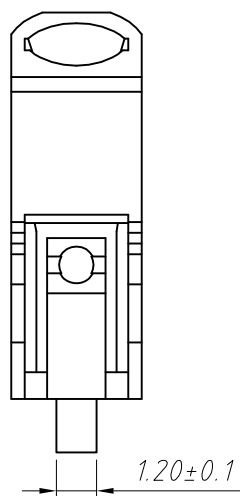

Order Information  
L-KLS2-L13-01P  
Number of Poles  
Series No.  
RoHS





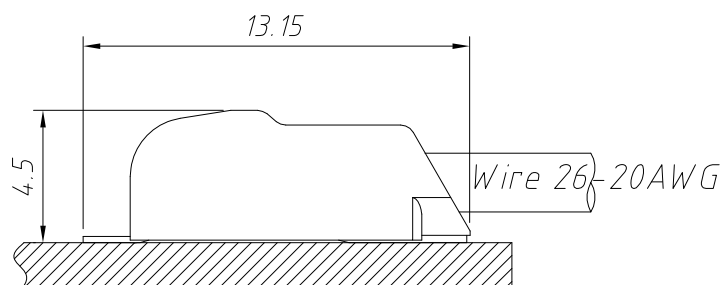


Installation drawing

Board Layout

| GENERAL TOLERANCE |       | ANGLE TOLERANCE |            | PROJECTION                                                                            |  | Description:                |
|-------------------|-------|-----------------|------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------|
| X. ±0.15          |       | X. ±5°          |            | UNITS                                                                                 | mm                                                                                    | Push-in CAGE type,SMD 4.0mm |
| .X ±0.03          |       | .X ±3°          |            | SHEET SIZE                                                                            | A4                                                                                    |                             |
| .XX ±0.05         |       | .XX ±2°         |            |                                                                                       | KLS P/N:                                                                              |                             |
| Draw by:          | Jenny | Date:           | 2018-03-10 |  | NingBo KLS ELECTRONIC CO.,LTD.                                                        |                             |
| Check by:         |       | Date:           | 2018-03-10 |                                                                                       |                                                                                       |                             |
| SCALE             |       | SHEET           | 1 OF 1     |                                                                                       |                                                                                       |                             |

RoHS Compliant

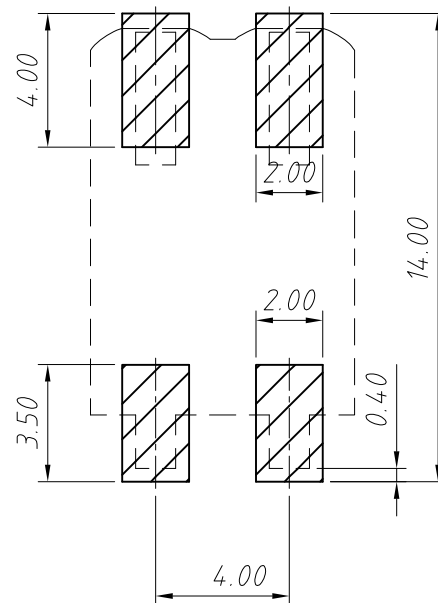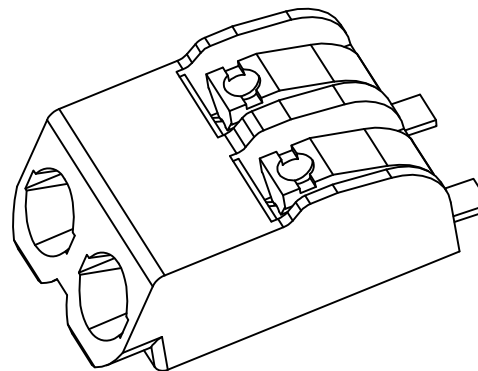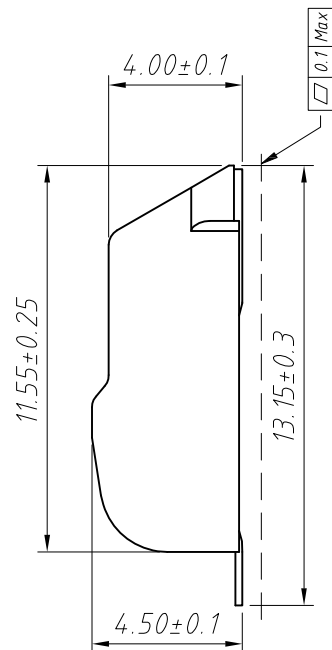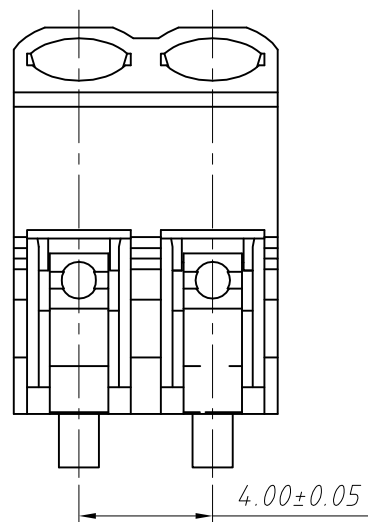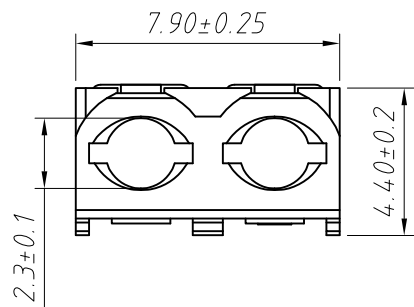

Board Layout

#### MATERIAL

Insulator:LCP,UL 94 V-0,Beige

Contacts:Phosphor Bronze,Tin-plated

#### Main Specifications

Poles:02P

Contact Resistance: $\leq 20m\Omega$

Insulation Resistance: $\geq 800M\Omega$

Rated Voltage:250V AC DC

Rated Current:6.0A AC DC

Withstanding Voltage:800V AC/minute

Temperature Range:  $-25^{\circ}C \sim +105^{\circ}C$


#### Order Information

L-KLS2-L13-02P

Number of Poles

Series No.



RoHS

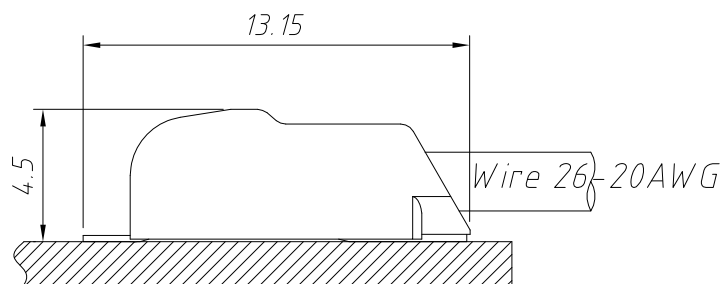

Installation drawing

| GENERAL TOLERANCE |       |       | ANGLE TOLERANCE     |            |   | PROJECTION                                                                                                           |  | Description:                |
|-------------------|-------|-------|---------------------|------------|---|----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------|
| X. $\pm 0.15$     |       |       | X. $\pm 5^{\circ}$  |            |   | UNITS                                                                                                                | mm                                                                                    | Push-in CAGE type,SMD 4.0mm |
| .X $\pm 0.03$     |       |       | .X $\pm 3^{\circ}$  |            |   | SHEET SIZE                                                                                                           | A4                                                                                    |                             |
| .XX $\pm 0.05$    |       |       | .XX $\pm 2^{\circ}$ |            |   |                                                                                                                      | KLS P/N:                                                                              |                             |
|                   |       |       |                     |            |   |                                                                                                                      |                                                                                       | L-KLS2-L13-02P              |
| Draw by:          | Jenny |       | Date:               | 2018-03-10 |   |  NingBo KLS ELECTRONIC CO.,LTD. |                                                                                       |                             |
| Check by:         |       |       | Date:               | 2018-03-10 |   |                                                                                                                      |                                                                                       |                             |
| SCALE             |       | SHEET | 1                   | OF         | 1 |                                                                                                                      |                                                                                       |                             |

RoHS Compliant

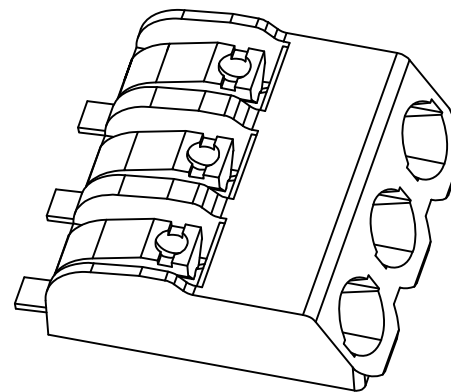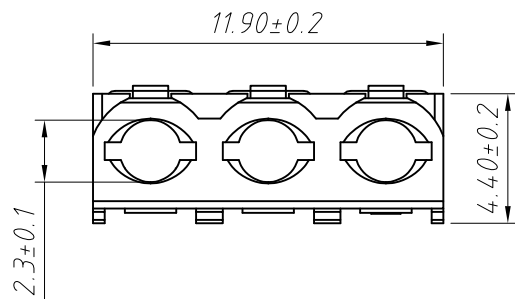

#### MATERIAL

Insulator:LCP,UL 94 V-0,Beige

Contacts:Phosphor Bronze,Tin-plated

#### Main Specifications

Poles:03P

Contact Resistance: $\leq 20m\Omega$

Insulation Resistance: $\geq 800M\Omega$

Rated Voltage:250V AC DC

Rated Current:6.0A AC DC

Withstanding Voltage:800V AC/minute

Temperature Range:  $-25^{\circ}C \sim +105^{\circ}C$



#### Order Information

L-KLS2-L13-03P


Number of Poles

Series No.

RoHS

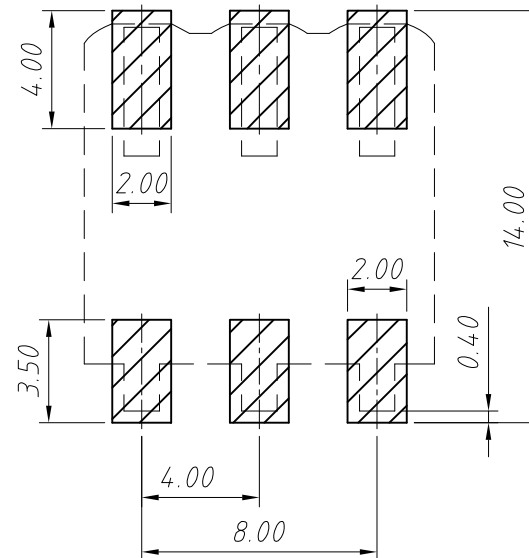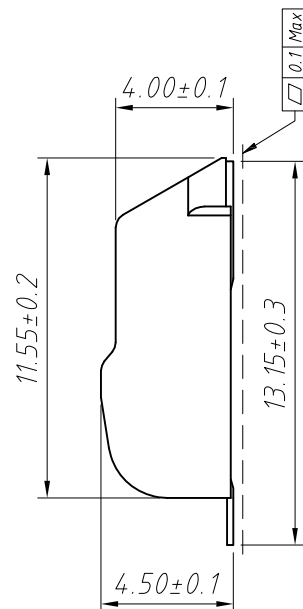

Board Layout

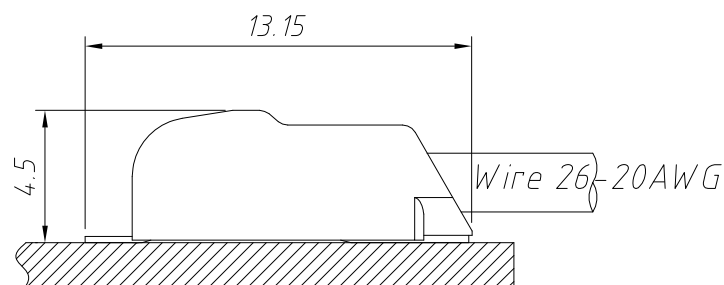

Installation drawing

| GENERAL TOLERANCE |       | ANGLE TOLERANCE     |            | PROJECTION                                                                            |  | Description:                |
|-------------------|-------|---------------------|------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------|
| X. $\pm 0.15$     |       | X. $\pm 5^{\circ}$  |            | UNITS                                                                                 | mm                                                                                    | Push-in CAGE type,SMD 4.0mm |
| .X $\pm 0.03$     |       | .X $\pm 3^{\circ}$  |            | SHEET SIZE                                                                            | A4                                                                                    |                             |
| .XX $\pm 0.05$    |       | .XX $\pm 2^{\circ}$ |            |                                                                                       | KLS P/N:                                                                              |                             |
| Draw by:          | Jenny | Date:               | 2018-03-10 |  | NingBo KLS ELECTRONIC CO.,LTD.                                                        |                             |
| Check by:         |       | Date:               | 2018-03-10 |                                                                                       |                                                                                       |                             |
| SCALE             |       | SHEET               | 1          | OF                                                                                    | 1                                                                                     |                             |