



Ver.	modify NO.	Details	Area	P.I.C	Date

Front View

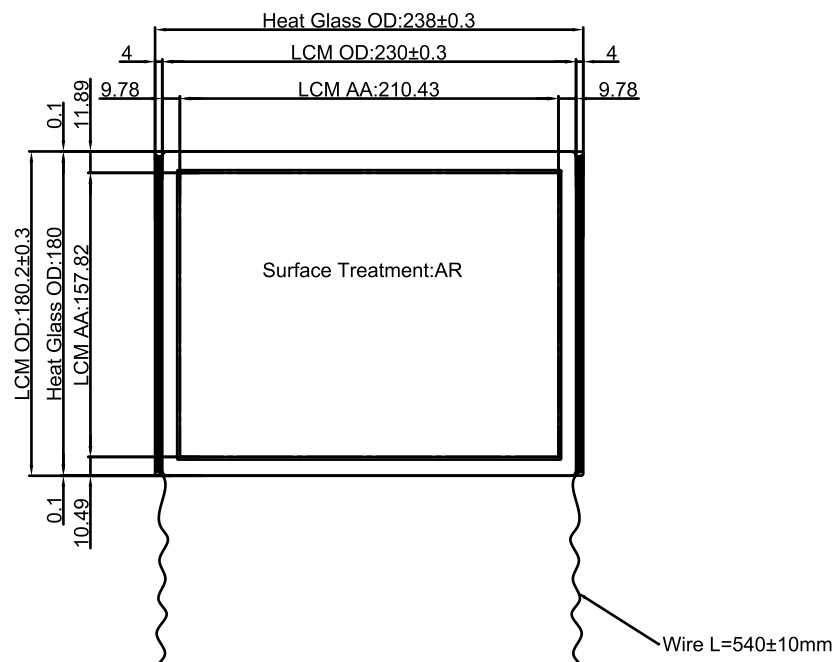

Side View

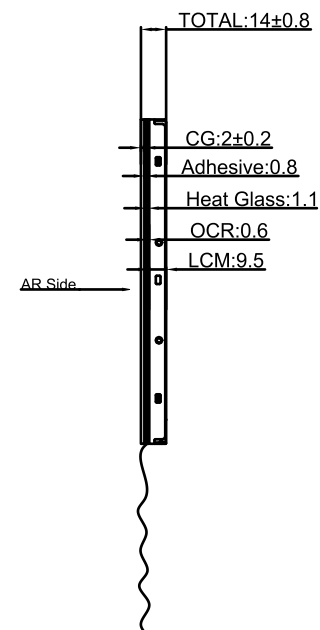

Technical Datasheet:

- Structure: Cover Glass+Heat Glass+LCM Optical Bonding
- Cover Glass: 2mm Tempered Glass
Surface treatment: AR
Heat Glass: 1.1mm ITO Glass Voltage: 24V, Power: $55\text{W} \pm 10\text{W}$
- LCD: P1040XGF1MA00
- Surface Hardness: $\geq 6\text{H}$
- Light Transmittance: $\geq 85\%$
- Working Temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 85\%\text{RH}$;
- Storage Temperature: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$, $\leq 85\%\text{RH}$;
- Unmarked Tolerance: $\pm 0.5\text{mm}$
- All materials used conform to RoHS standards

Part No.		BTP-CGM-P1-10.4-HT-SN30				
Product Name: 10.4 inch Display			Drawing No.		GM104260521SN30	
			Project Code.		GM104SN30	
Business Unit:			Period Mark		View Angle	Ratio
SNT-BTP			A			1:1
BOM Code		2.01.104.01.0130		Page 1		Total 1 Page
Product Series		BTP-CGM		 思诺泰利电子（苏州）有限公司 SINOTRONICS INC.		