

Part number	LVDS-LED-FI-X30HL-DF13-30DS-300-MF20-MOS12A1
Type	LVDS cable
Description	LVDS cable CON1= X30HL CON2= DF13-30DS, CON3=PHR-8, length = 300 mm
Length	300 mm
XS1	FI-X30HL
XS2	DF13-30DS
XS3	PHR-8

XS1		XS2	
FI-X30HL		DF13-30DS	
1	+12V	1	
2	+12V	2	
3		3	
4		4	
5	ENABLE	5	
6	DIM	6	
7	GND	7	
8	GND	8	
9	+3,3V	9	
10	+3,3V	10	
11	GND	11	
12	GND	12	
13	RX00-	13	GND
14	RX00+	14	GND
15	GND	15	GND
16	RX01-	16	GND
17	RX01+	17	RX03+
18	GND	18	RX03-
19	RX02-	19	RX0C+
20	RX02+	20	RX0C-
21		21	RX02+
22	RX0C-	22	RX02-
23	RX0C+	23	RX01+
24	GND	24	RX01-
25	RX03-	25	RX00+
26	RX03+	26	RX00-
27		27	+3,3V
28		28	+3,3V
29		29	
30		30	

№	Проводник	Цель	XS1	XS2	XS3
1	Красный	12 V	1	-	3
2	Красный	12 V	2	-	4
3	Коричневый	ENABLE	5	-	1
4	Желтый	PWM	6	-	-
5	Черный	GND	7	-	5
6	Черный	GND	8	-	6
7	Красный	3.3 В	9	27	
8	Красный	3.3 В	10	28	
9	Черный	GND	11	15	
10	Черный	GND	12	16	
11	Белый	Rx0-	13	26	
12	Голубой	Rx0+	14	25	
13	Черный	GND	15	14	
14	Белый	Rx1-	16	24	
15	Голубой	Rx1+	17	23	
16	Черный	GND	18	13	
17	Белый	Rx2-	19	22	
18	Голубой	Rx2+	20	21	
19	Белый	RxCLK-	22	20	
20	Голубой	RxCLK+	23	19	
21	Белый	Rx3-	25	18	
22	Голубой	Rx3+	26	17	


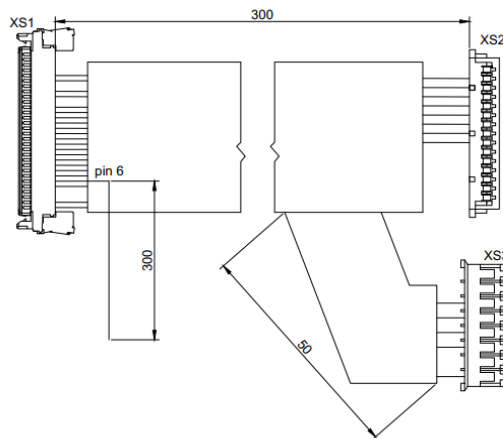


Рисунок 1

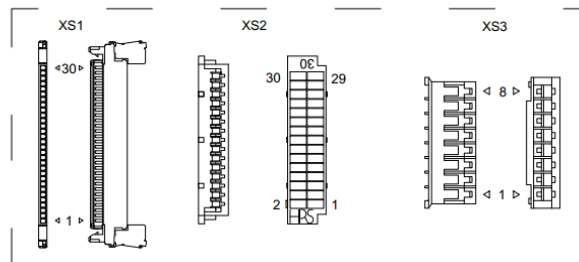

XS3	
PHR-8	
1	ENABLE
2	DIM
3	+12V
4	+12V
5	GND
6	GND