

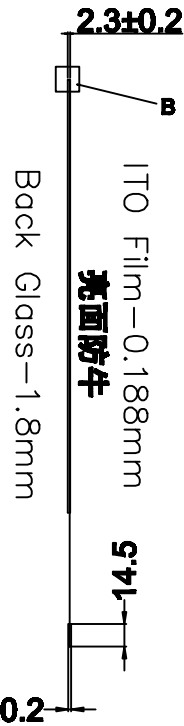


由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

修改内容:

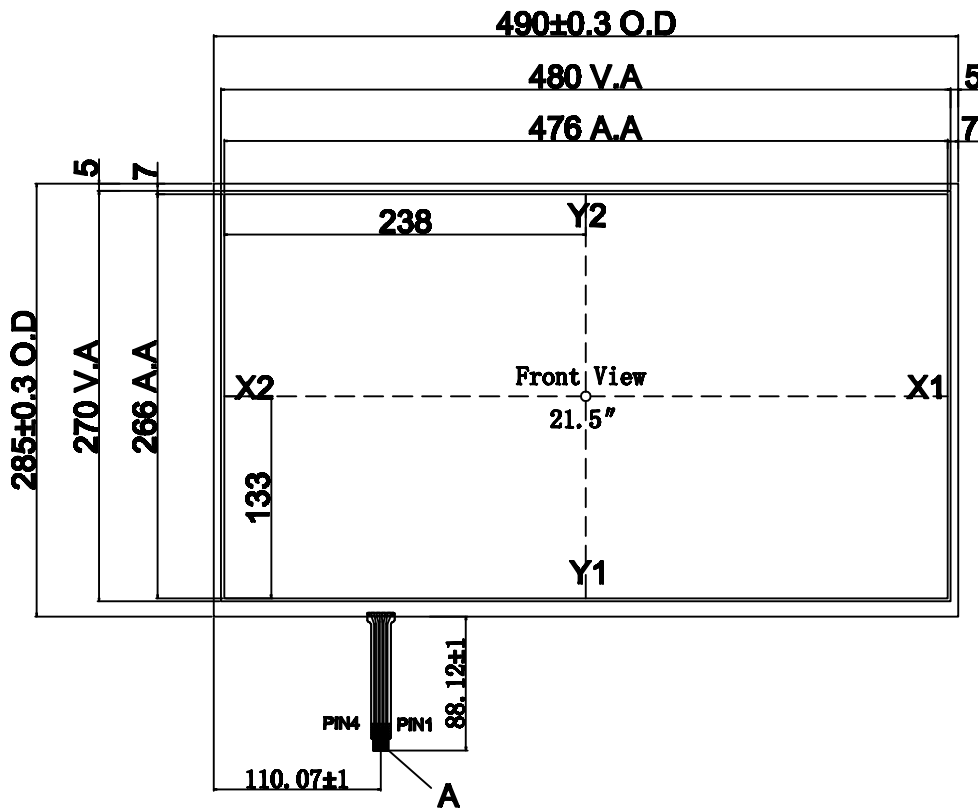

PIN	OUT	Contact Side
1	X1	
2	Y1	
3	X2	
4	Y2	

Production Number	R4215		Pro(3)	
VER:	Tolerance		UNIT	mm
Customer Number			Scale	1:1
DATE	2015.11.09		Sheet	1/1
APPROVE	PM	CHECK	DRAWN	

Item(Notes)	Specification	
1.Type	Film to Glass	
2.Operating Voltage	DC(3-7V)	
3.Response Time	≤10ms	
4.Operation Temperature	-10℃~80℃	
5.Storage Temperature	-20℃~70℃	
6. Hitting Life Time:	>1,000, 000 times	
7. Wkling Life Time:	>100, 000 times	
8.Linearity	1.5% Max.	
9.Light Transparency	78% Min	
10.Surface Hardness	3H(Pencil)	
11.Operation force	80g-250g	
12.Resistance	X:	100Ω~1000Ω
	Y:	100Ω~800Ω
13. Insulation resistance		≥20MΩ
14.Other non dimension for not 40.2mm		