



Ver.	modify NO.	Details	Area	P.I.C	Date




Front View

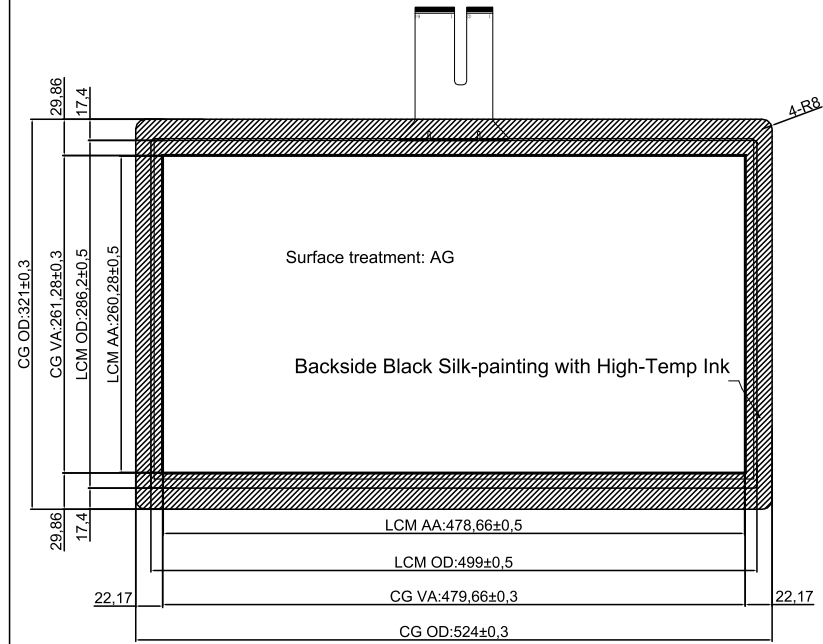

Side View

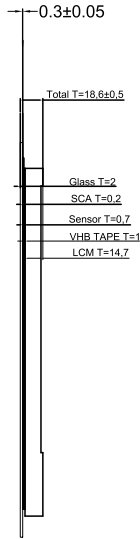

Back View

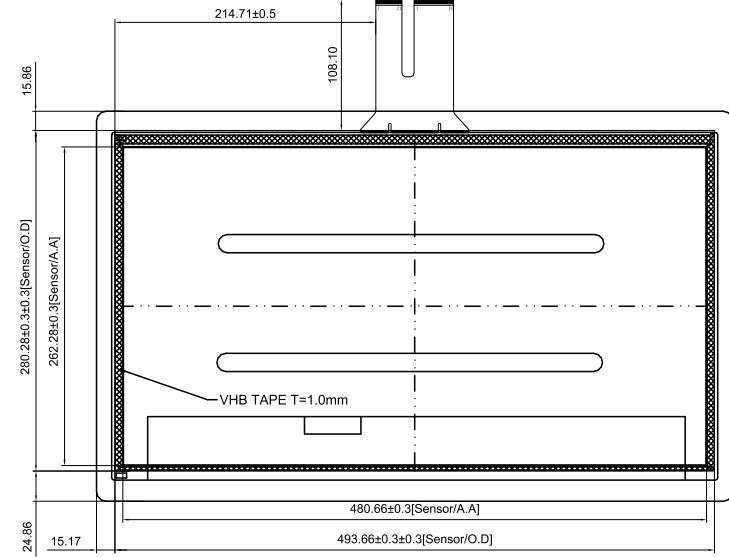

Technical Datasheet:

- Structure: TP+LCM Tape Bonding
- Cover Glass: 2mm Tempered glass, AG Surface treatment
- LCD: DV215FHM-R10(1500nits)
- TP Controller: BTP-TMS-CTR-ETI-215B-R11
- TP Controller IC: EETI 81H84 C3P4V1(TX*RX=33*60)
- Surface Hardness: ≥6H
- Light Transmittance: ≥85%
- Operating Temperature: -10℃~+60℃, ≤85%RH;
Operating environment: Outdoor, water proof
- Storage Temperature: -10℃~+65℃, ≤85%RH
- Unmarked Tolerance: ±0.5mm
- All materials used conform to RoHS standards

Touch Panel Structure

TOP		
-----Cover	2.0mm	} 0.7mm
-----SCA	0.2mm	
-----ITO		
-----Sensor glass		
-----ITO		
BOTTOM		

Designed by:	Curry.Wang
Checked by:	Betty.Fu
Approved by:	Cale.Chen
Workmanship:	Yong.Xin
Standardization:	Link.Chen
Released by:	Rocky.Liu

Part No.		BTP-TMS-21.5-G1-R11		
Product Name: 21.5inch Touch Display (TP+LCM Tape Bonding)		Drawing No.	MS215221122R11	
		Project Code.	MS215R11	
Business Unit: SNT-BTP		Period Mark	View Angle	Ratio
		A		1:1
BOM Code	2.22.215.24.0111	Page 1	Total 1 Page	
Product Series	BTP-TMS	思诺泰科电子(苏州)有限公司 SINOTRONICS INC.		