

SPECIFICATIONS

Voltage Rating: 600V AC, DC
 Current rating: 7A, AC, DC
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: PA66, UL94V-2 or UL94V-0
 Temperature Range: -25°C to +85°C

ORDER INFORMATION







5 H 4 2 0 0 M 0 - 2 X X W B L 0 0 L X X

AMTEK 糧德
 2020.10.22
 Released DCC



Pitch 4.20mm M:Male No. of contacts per row W:Natural Insulator B:Bag RoHS 01:UL94V-2 02:UL94V-0



No. of contacts	Dimensions		
	A	B	C
2X01	---	5.6	10.8
2X02	4.2	9.8	15.0
2X03	8.4	14.0	19.2
2X04	12.6	18.2	23.4
2X05	16.8	22.4	27.6
2X06	21.0	26.6	31.8
2X07	25.2	30.8	36.0
2X08	29.4	35.0	40.2
2X09	33.6	39.2	44.4
2X10	37.8	43.4	48.6
2X11	42.0	47.6	52.8
2X12	46.2	51.8	57.0

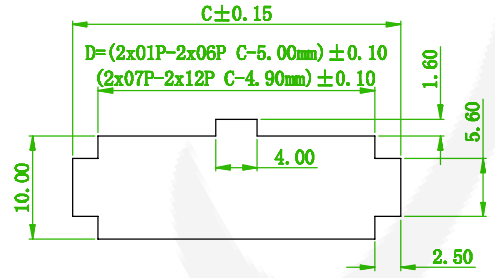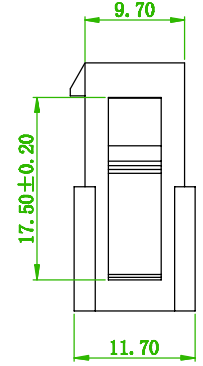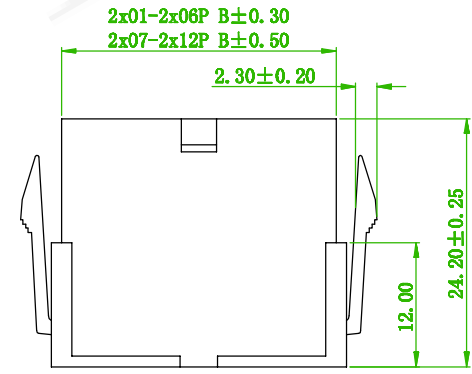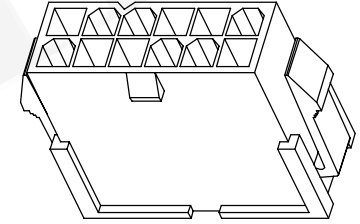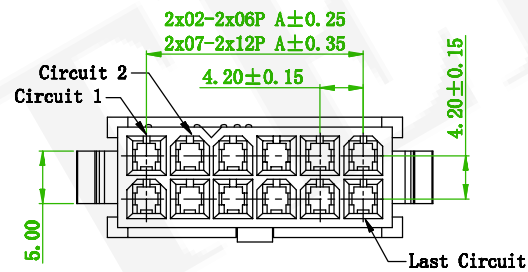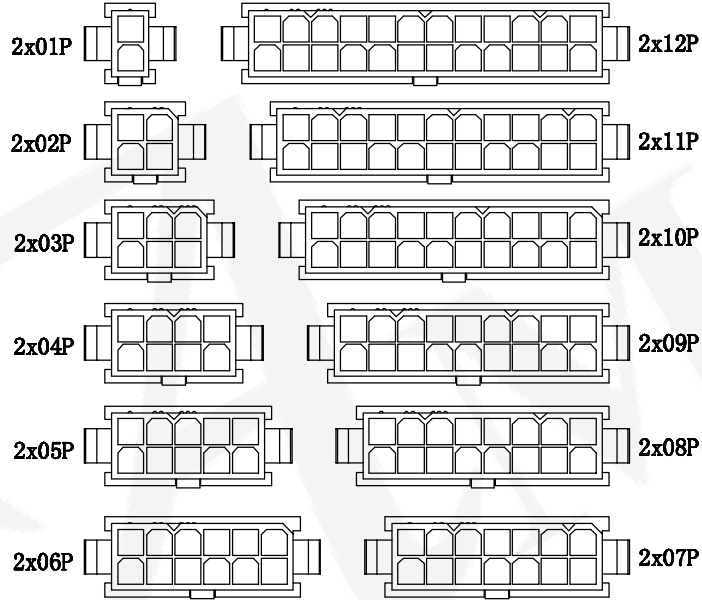

PANEL CUTOUT MAX PANEL 2.00 THICKNESS

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	4.2mm HOUSING WIRE SIDE			頁數 Page	1/2
	品號 PART NO.	5H4200M0-2XXWBL00LXX			繪圖 DRAWN	Benson 2020/10/20
	圖號 DRAWING NO.	GN110-BN345	版本 REV.	A	核對 CHECKED	Josh 2020/10/20
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/10/20
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE