
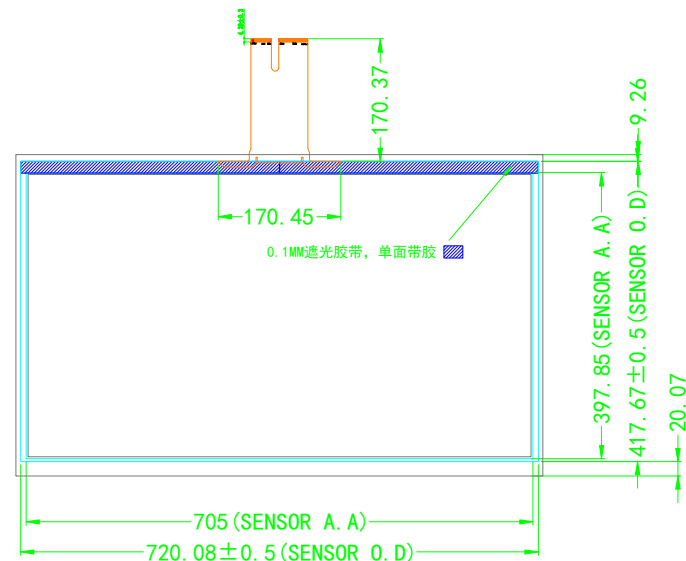
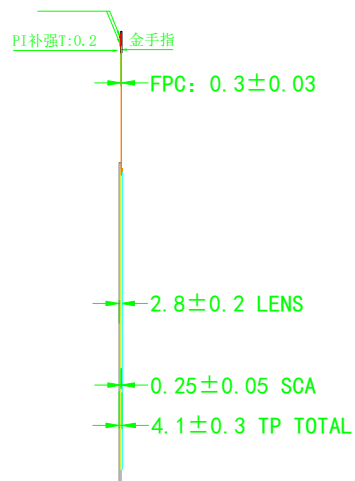


TOP VIEW

SIDE VIEW

BOTTOM VIEW

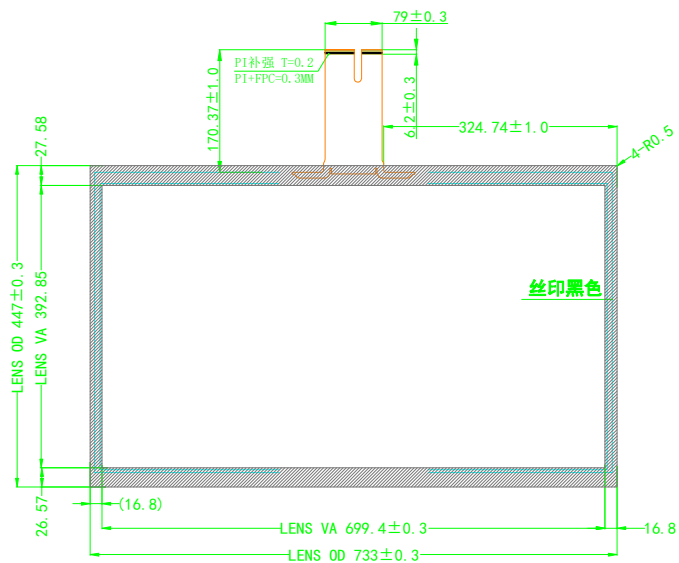

Property	Requirement
Type	Glass to Glass
IC	COB ILITEK2312C3P3V1
Surface Hardness	≥6H
Light Transmission	≥83%
Operation Temperature	-20°C~70°C
Storage Temperature	-30°C~80°C

USB PIN ASSIGNMENT

1	VBUS
2	D-
3	D+
4	GND

IIC PIN ASSIGNMENT

1	VDD
2	GND
3	SDA
4	SCL
5	INTB
6	RST

RS232 PIN ASSIGNMENT

1	VBUS
2	RXD
3	TXD
4	GND

SINOTELECTRONICS INC.


TITLE:
产品编号

SNT-ITO-TPB-32-ILI-R02

Designed By:
设计

Customerid:
客户编号

View:
投影方式



Checked By:
审核

Unit:
单位

mm

Approved By:
批准

Date:
日期

20200604

Scale:
比例

1:1

A

B

C

D

E

F

G