

SPECIFICATION ⚠
CURRENT RATING: 0.5 AMP ⚠
INSULATION RESISTANCE: 1000MΩ MIN AT 250V DC. ⚠
CONTACT RESISTANCE: 100mΩ MAX. ⚠
DIELECTRIC VOLTAGE: 500V AC FOR ONE MINUTE ⚠
OPERATION TEMPERATURE: -40°C to +85°C ⚠

MATERIAL
INSULATOR: LCP, UL 94V-0, BLACK
CONTACT: C2680
SHELL: SUS201

ORDER INFORMATION

5

K

T

F

G

-

0

8

NO. OF CONTACTS

X

X

X

X

L


0

1




S0:SELECTIVE
Au

N:W/O PEG

H: T/R W/O CAP

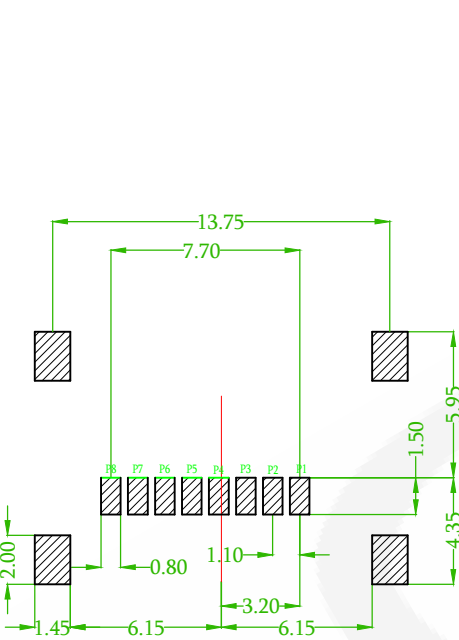

RECOMMENDED PCB LAOUT
(PCB TOLERANCE ±0.05)

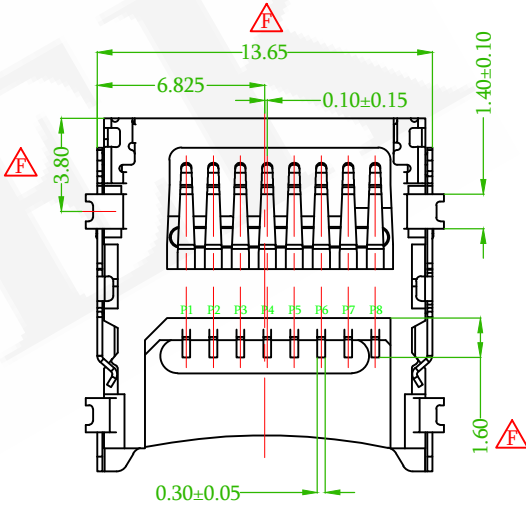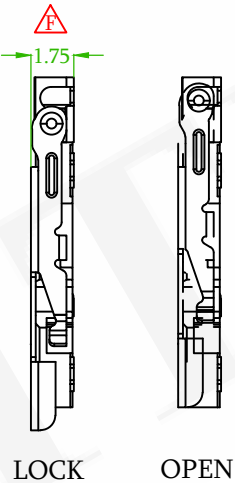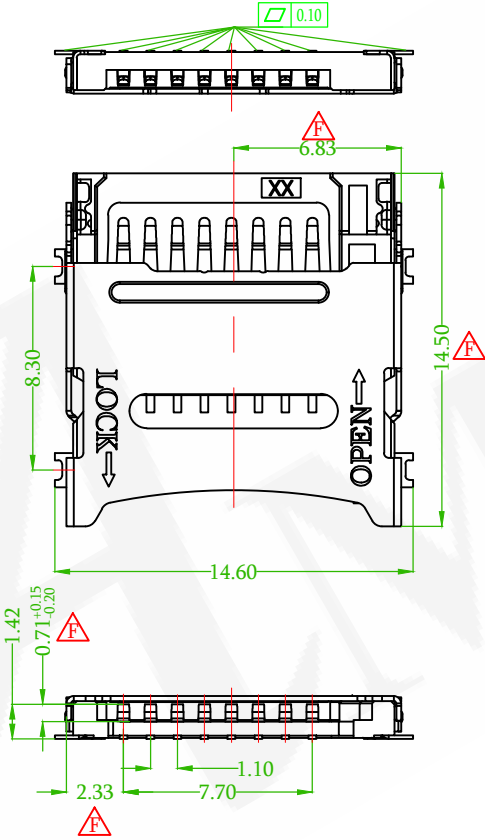

⚠	ECN-202506014 Revise the Drawing	Gaby	2025/06/25
⚠	ECN NO.:240914 Revise the Drawing	Gaby	2024/10/24
⚠x6	ECN NO.:230203 Revise the Drawing	Rex	2023/02/14
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	SIM CARD HINGE TYPE				頁數 Page	1/1
品號 PART NO.	5KTFG-08XXXXL01				繪圖 DRAWN	DAVID 2019/10/01
圖號 DRAWING NO.	GN195-DV338	版本 REV.	G	核對 CHECKED	JOSH 2019/10/01	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2019/10/01	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		