
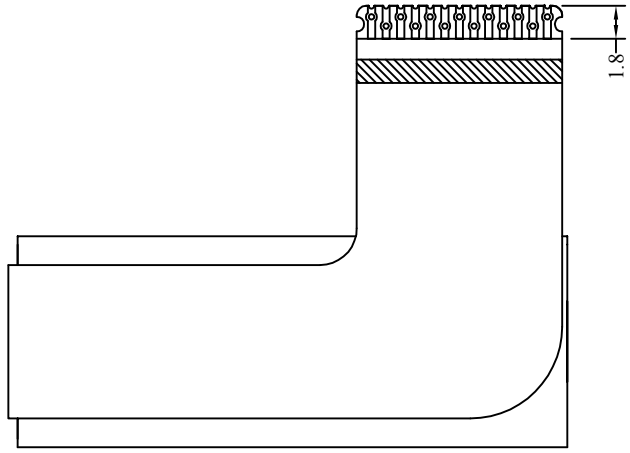



由 Autodesk 教育版产品制作

SYM	REV	DESCRIPTION	DATE
	01	First issue	Oct-30-2017
	02	更改模式	Jun-03-2018

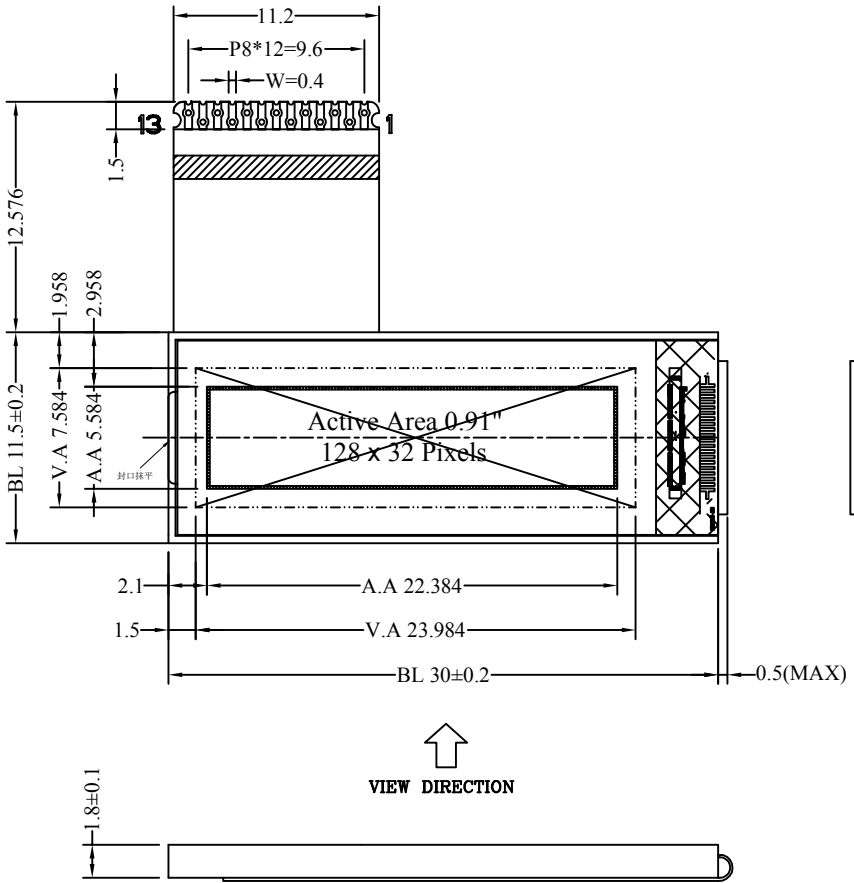

PIN	SYMBOL
1	VDD2.8
2	IOVDD1.8
3	VSS
4	A0
5	CSB
6	SCL
7	SDA
8	RST
9	LEDA
10	LEDK
11	V0
12	XV0
13	VG



↑
VIEW DIRECTION



1pc WHITE LED, 3V±0.2V, 15mA
恒流控制建议电流在15mA左右
恒压控制建议主板上3.3V供电加限流电阻

NOTES:

- | | |
|---------------------------|-------------------|
| 1. DISPLAY TYPE: | STN/BLUE/NEGATIVE |
| 2. OPERATING VOLTAGE: | VDD=3V, Vlcd=10V |
| 3. OPERATING TEMPERATURE: | -20°C~70°C |
| 4. STORAGE TEMPERATURE: | -30°C~80°C |
| 5. DRIVE MODE: | 1/33D, 1/7B |
| 6. VIEWING DIRECTION: | 6:00 |
| 7. POLARIZER TYPE: | TRANSMISSIVE |
| 8. CONNECTOR: | COG/ST7539i2 |
| 9. CUSTOMER No.: | |

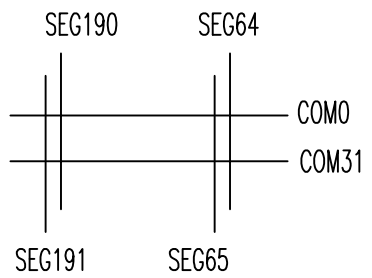

TITLE: CD			
Draw: WPY	MODEL: HTD12832-07	DWC NO: C-03	
Chk:	UNIT: mm		GENERAL TOL: ±0.2
Apv:	SCALE:		SHEET NO: 1/1